

ESWT Torino, 2019-06-05

# PRo3D Rendering & 3D Analysis tool for instrument cooperation



Thomas Ortner(2), **Gerhard Paar(1)**, Christoph Traxler(2),  
Piluca Caballo-Perucha(1), Rob Barnes(3),  
Sanjeev Gupta(3), Kevin Kearney(4)

(1) JOANNEUM RESEARCH; ExoMars PanCam & CLUPI Co-I, Mars 2020 Mastcam-Z Co

(2) VRVis, (3) Imperial College London, (4) Natural History Museum Vienna

# Purpose of (3D) Vision on Mars

## Context

- What is interesting ?
- Where to go next ?

## Navigation

- Where am I ?
- Which path to take ?
- Am I moving correctly ?
- Any hazards ?



## Inspection

- Am I doing well ?

## Science....

## & Collaboration

Imperial College  
London

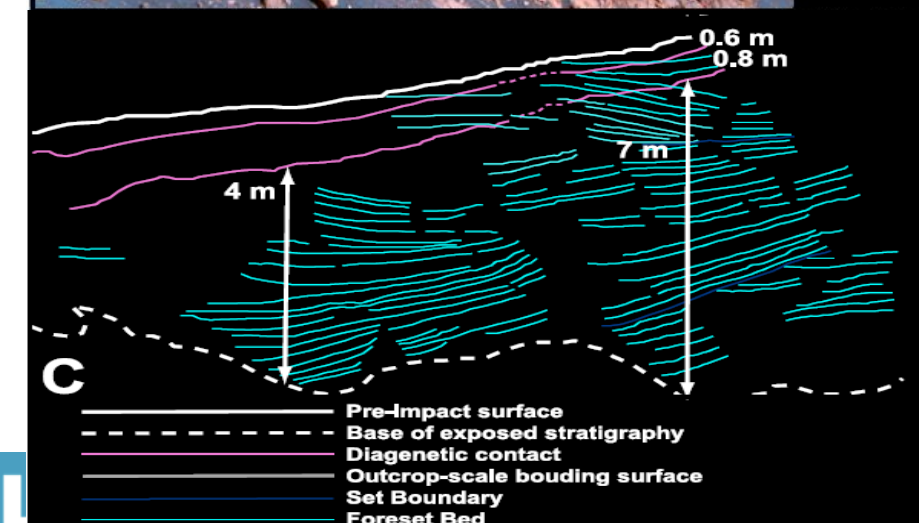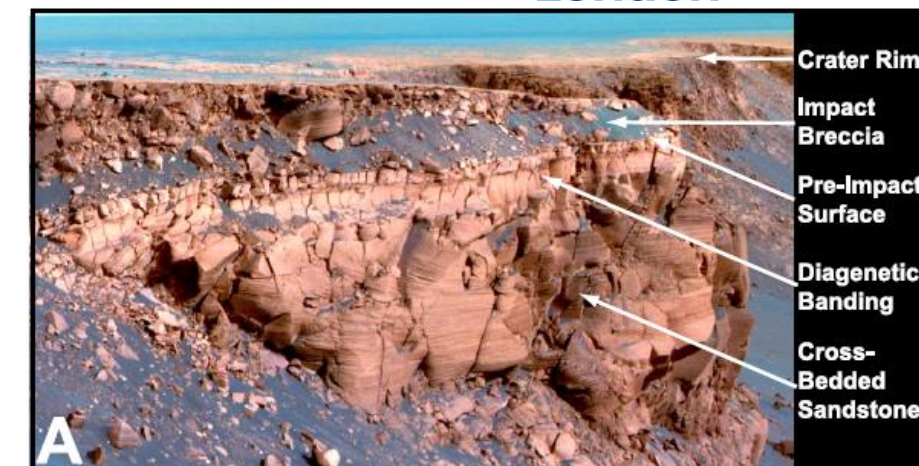

# Targets of Rover Imaging: Customers / Functions / Products

## Mission Clients

- Rover Driving Team to plan
- Scientists to plan**
- Scientists to analyze**

## The Public

- For education
- As tax payer
- For science

## 3D Mapping

- On-board path planning & hazard avoidance
- On-ground for tactical & strategic planning**

## Navigation

- On-board visual odometry
- On-ground absolute localization






## Visualization

- Planning & understanding operations
- Planning & understanding science**
- Context for instruments**

Atmosphere  
Multispectral Analyses  
Morphology



- PRoViP: Batch Stereo / 3D Vision Processing
  - DTM, Panoramas, other 3D data products from PanCam/NavCam/LocCam
- PRo3D: Interactive Real-Time Rendering
  - Huge multi-scale 3D data
  - Support for scientific operations

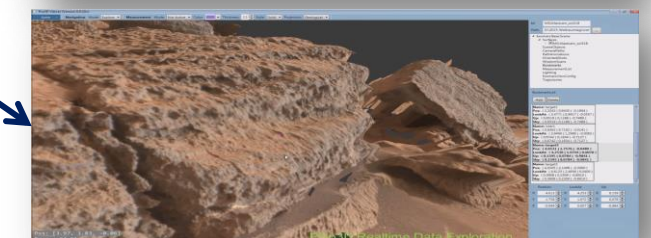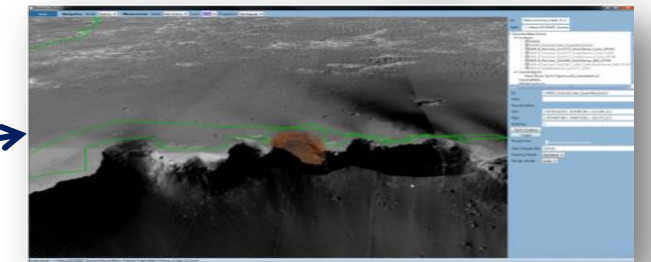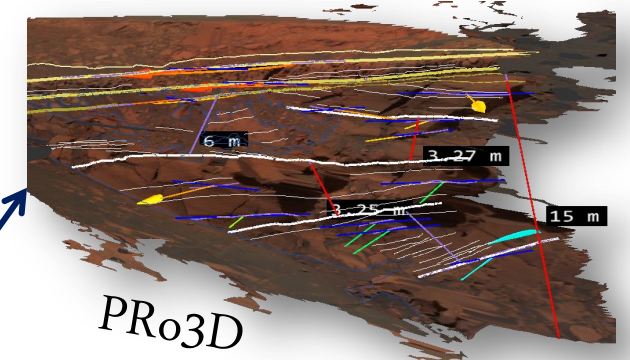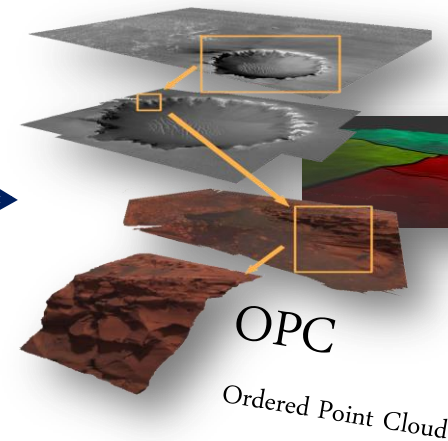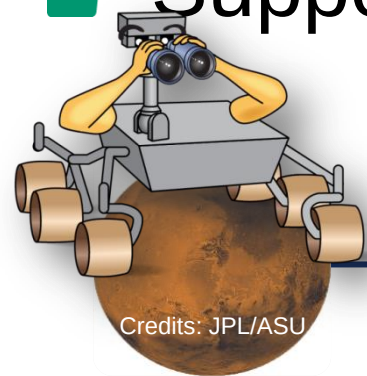



# Planetary 3D Vision – PPro3D Viewer

Planetary Robotics 3D Viewer (PPro3D) developed by JR long-term partner

VRVis is an interactive real-time renderer to explore 3D vision products.

<http://pro3d.space/>



PPro3D standalone version (here: annotation mode)

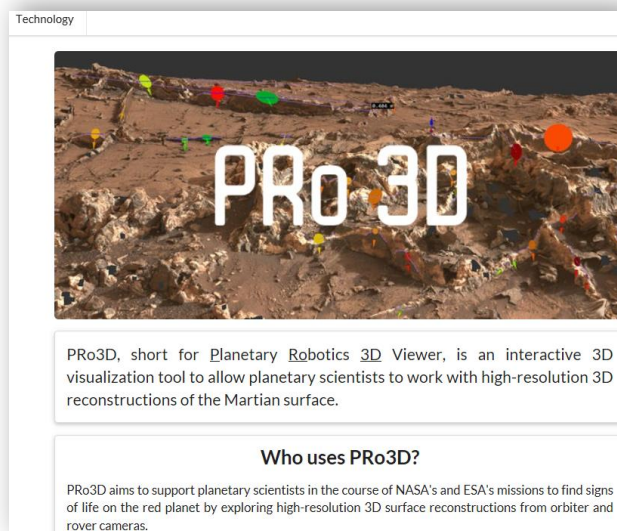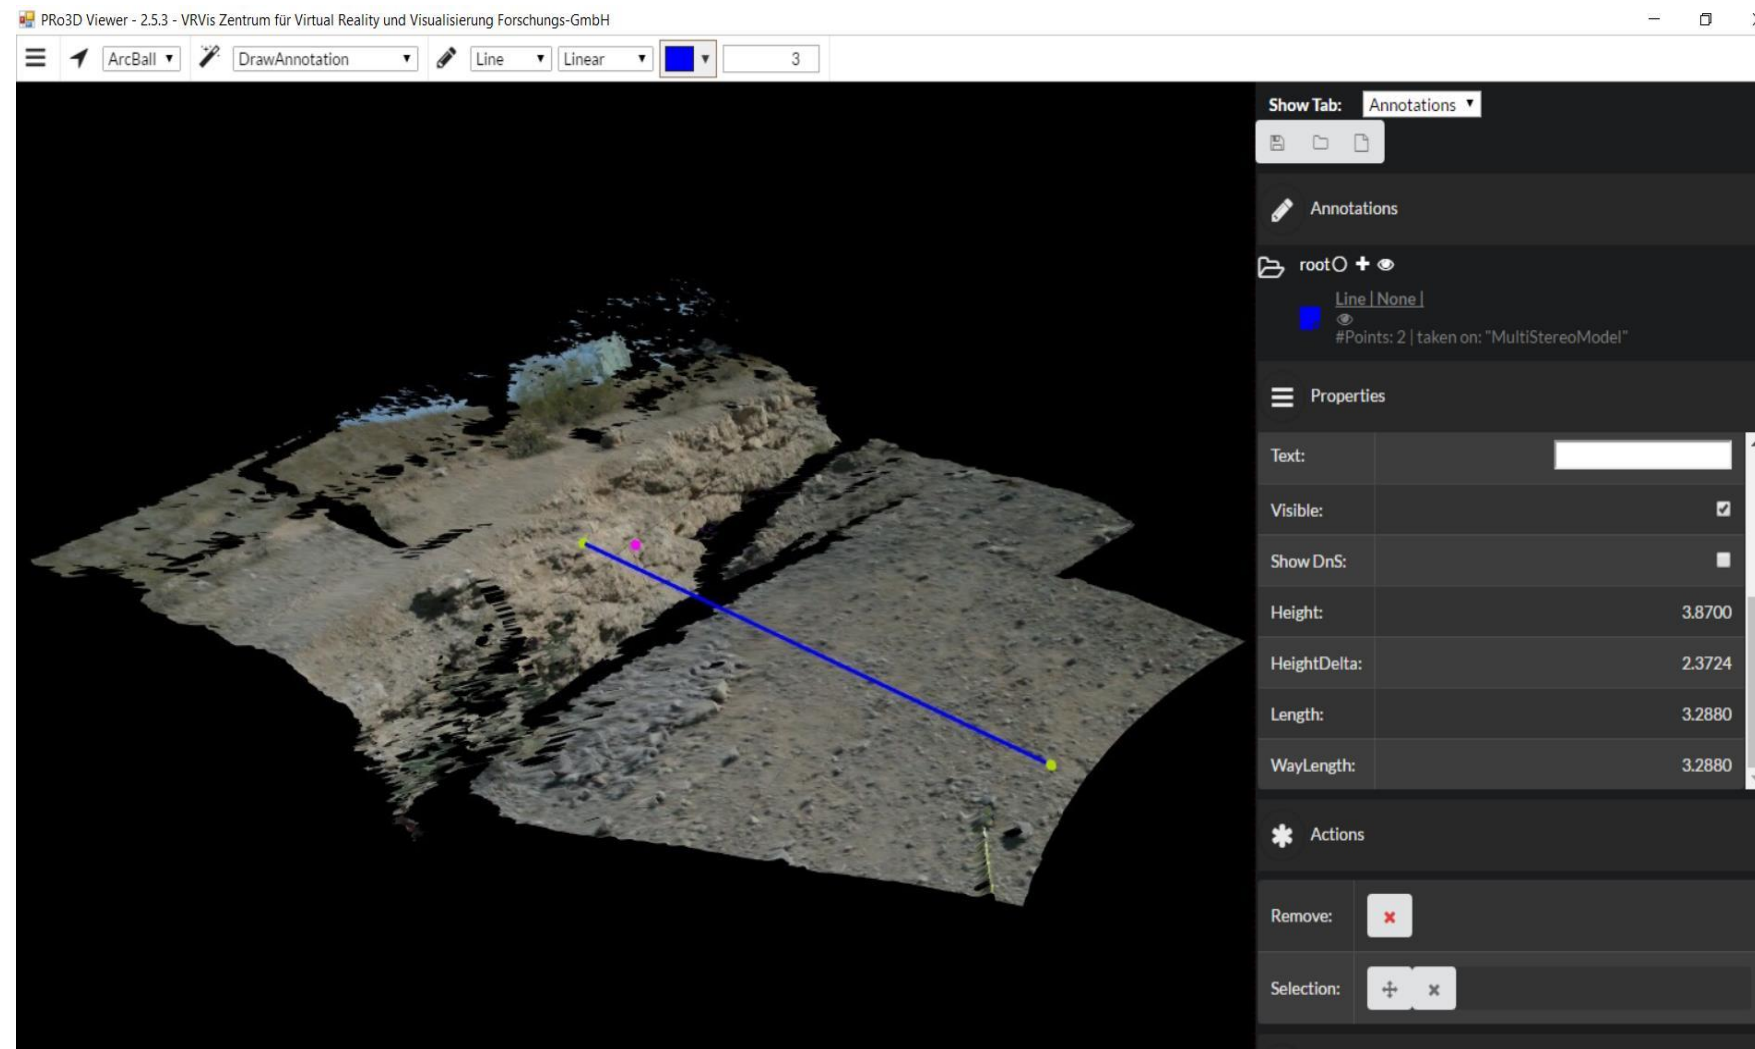

# PRo3D Features I


- interactive rendering of **multi-scale 3D surfaces** in **different render modes** (i.e. solid, wireframe)
- **efficient large-context navigation** in the 3D scene using explore, free fly or orbital mode for overall scene understanding
- Ordered Point Cloud format\* (OPC) containing 3D data as **real Cartesian coordinates** (x/y/z) in **different pre-processed resolutions** to facilitate **position and distance dependent level-of-detail rendering**
- visualization & navigation of **huge datasets** („no limits“ due to out-of-core technique)
- **visual fusion** of multi-sensor and multi-scale data
- **visualization and manipulation** of other data, such as **vrml objects**, **trajectories**, **3D point lists** and **sub-surface radar scans**

\*OPC format developed by VRVis & JR

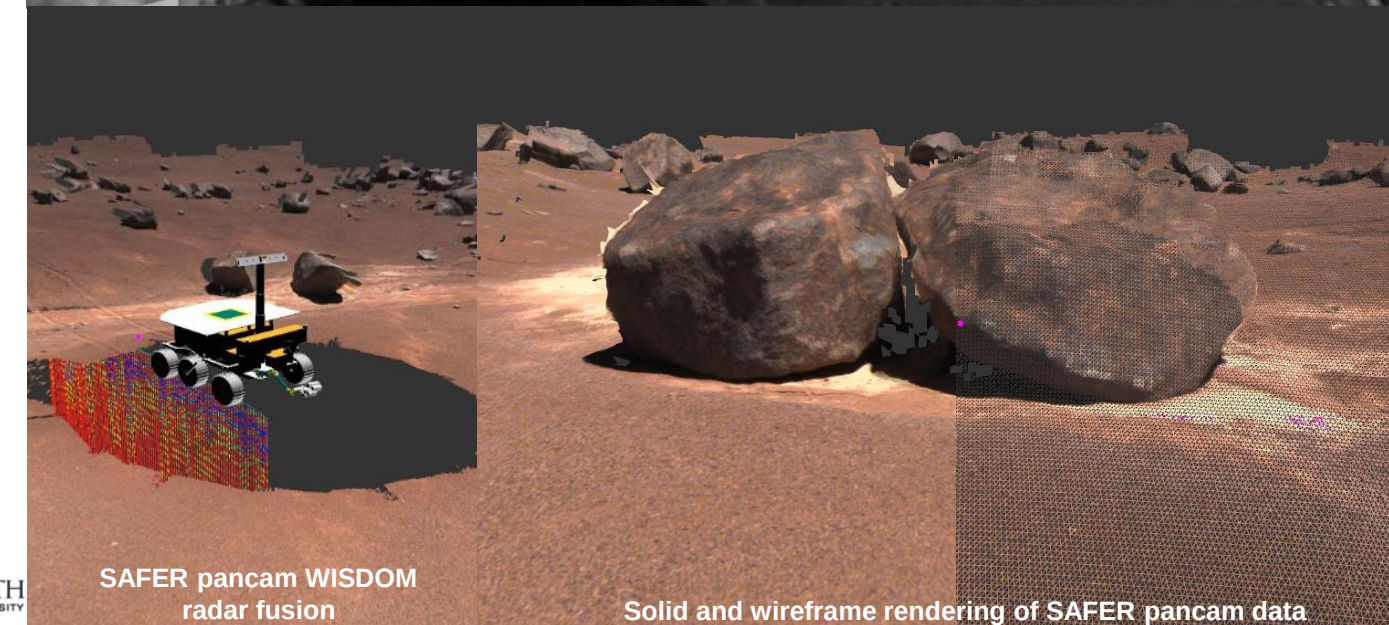
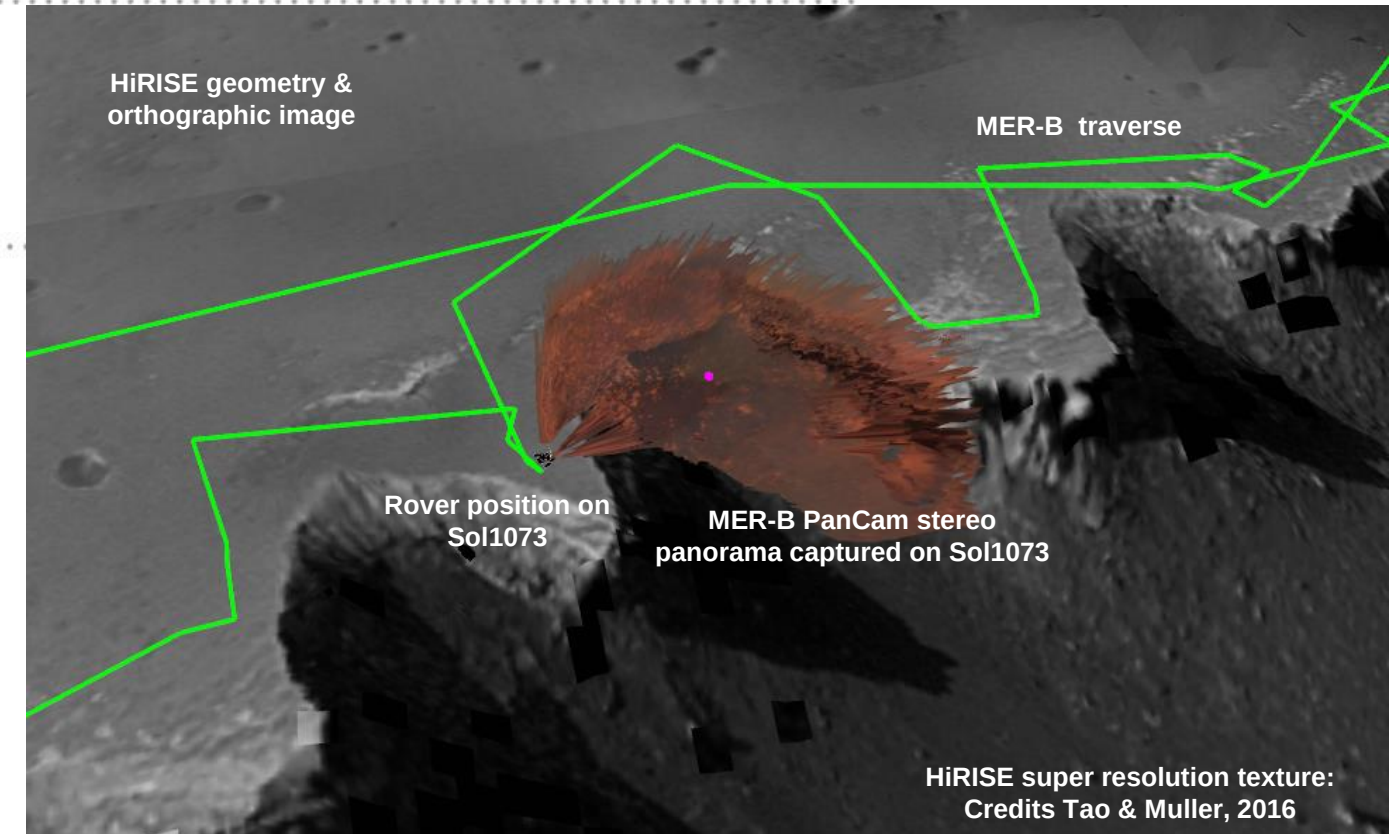


# PRo3D Features II


- handling of **multiple textures** and **maps** (DEM by-products) for 3D geometry complementation
- **measurement tools** for exact **geological assessment** of the surface
- **annotation** of surfaces and other scene elements
- **view planning** and **simulated view** functionality to simulate various instruments' field of view
- **user interactive transformations** of all supported data types
- **multi user** handling / data exchange

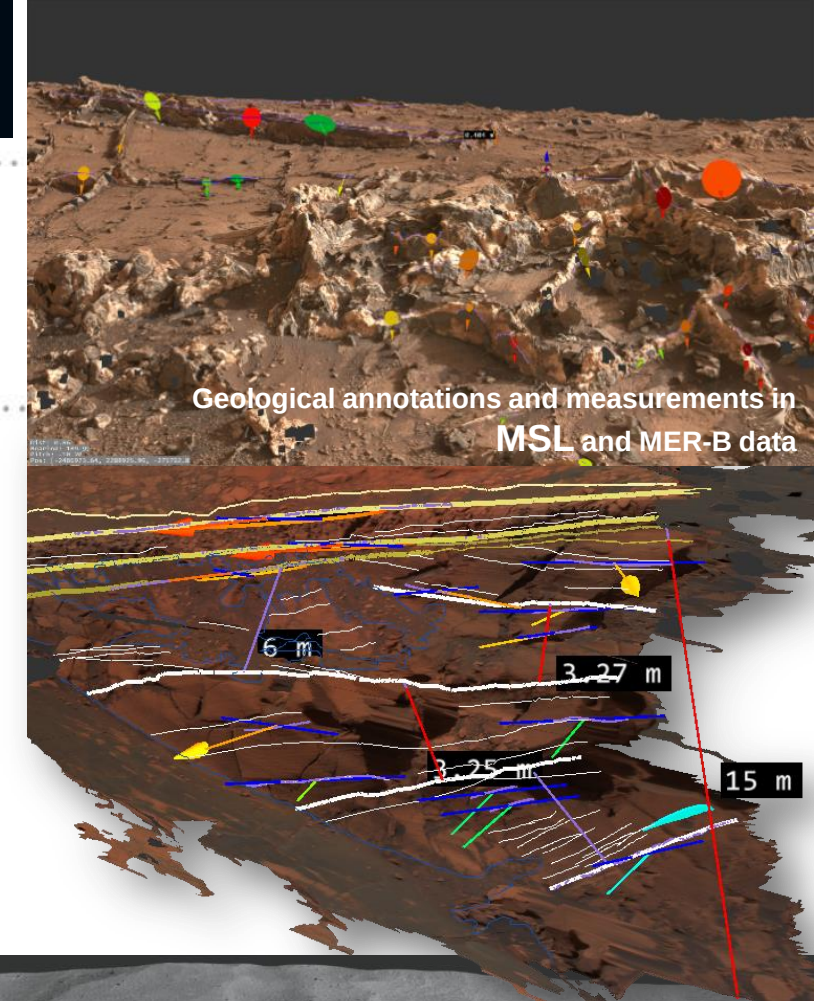

MSL Mastcam 100mm, WBL planning scenario  
Sol 981 – Sol 986, stereo base ~50m, distance to ROI ~170m  
View planning foresees occlusion in cam view Sol 981

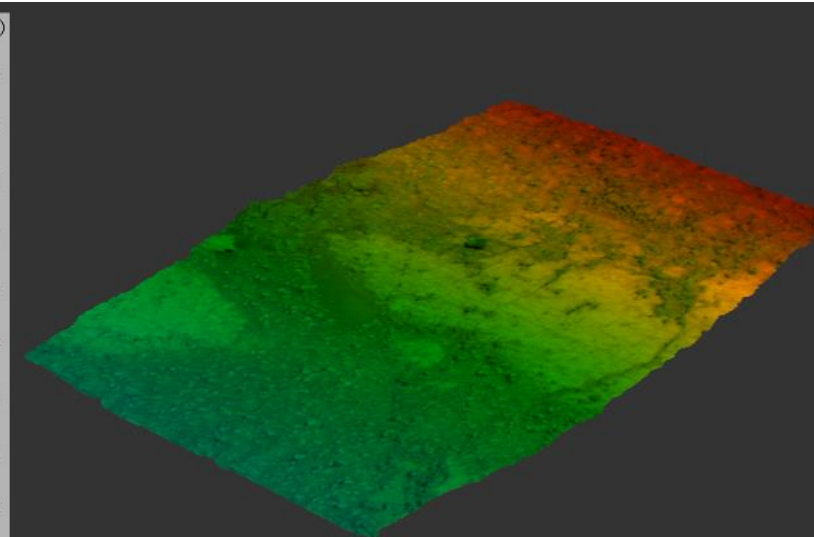
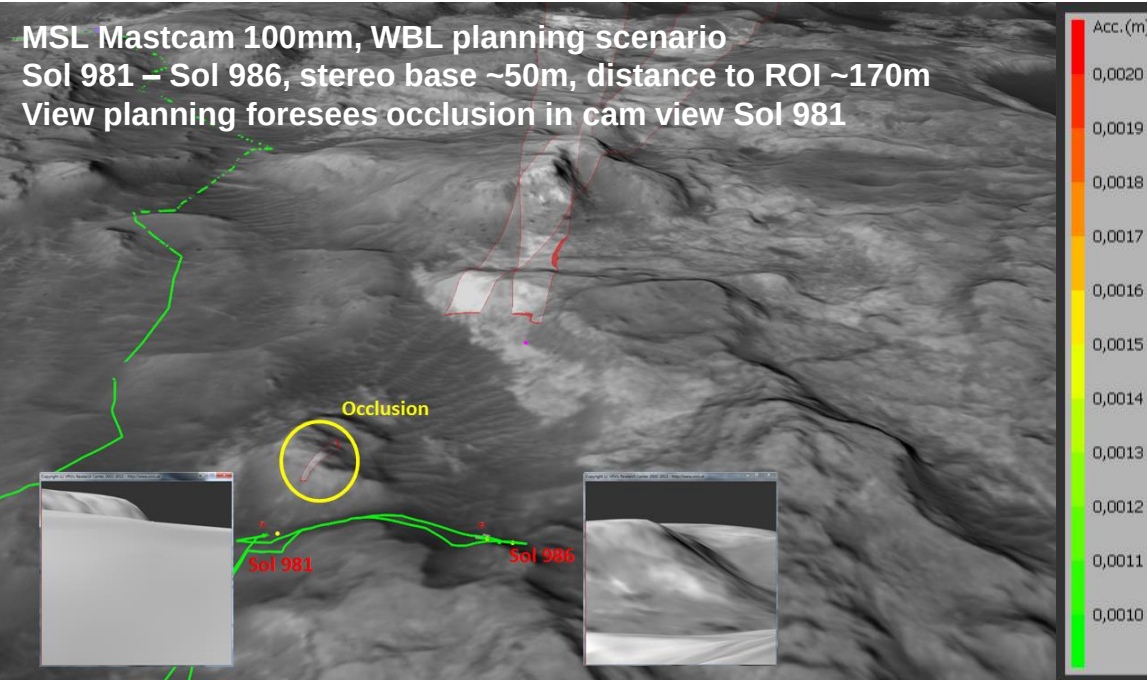


Color coded accuracy map visualization

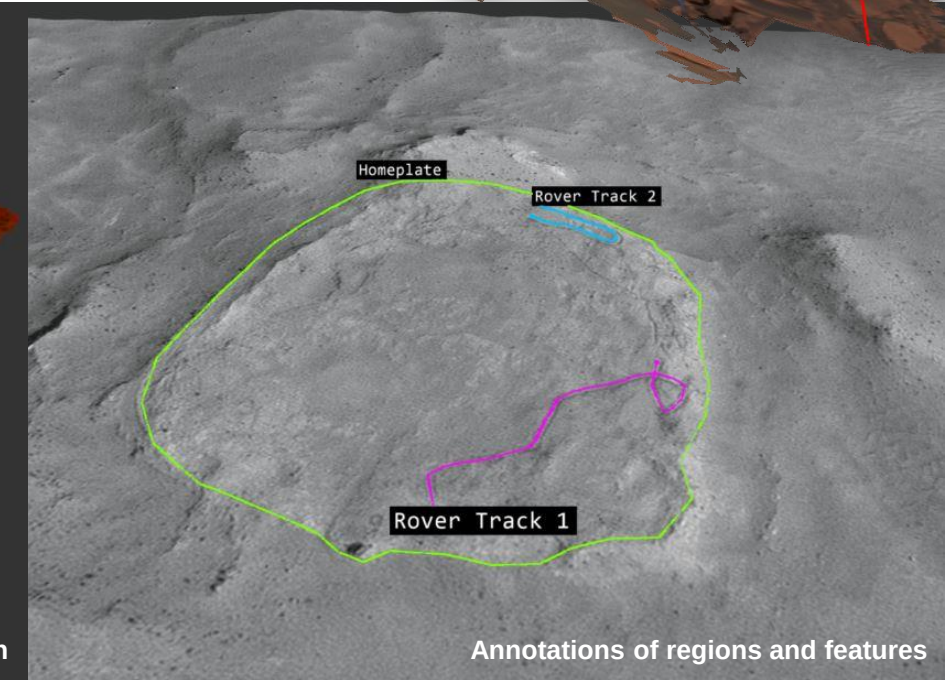

Annotations of regions and features

# Supporting Data Fusion and Levels of Detail

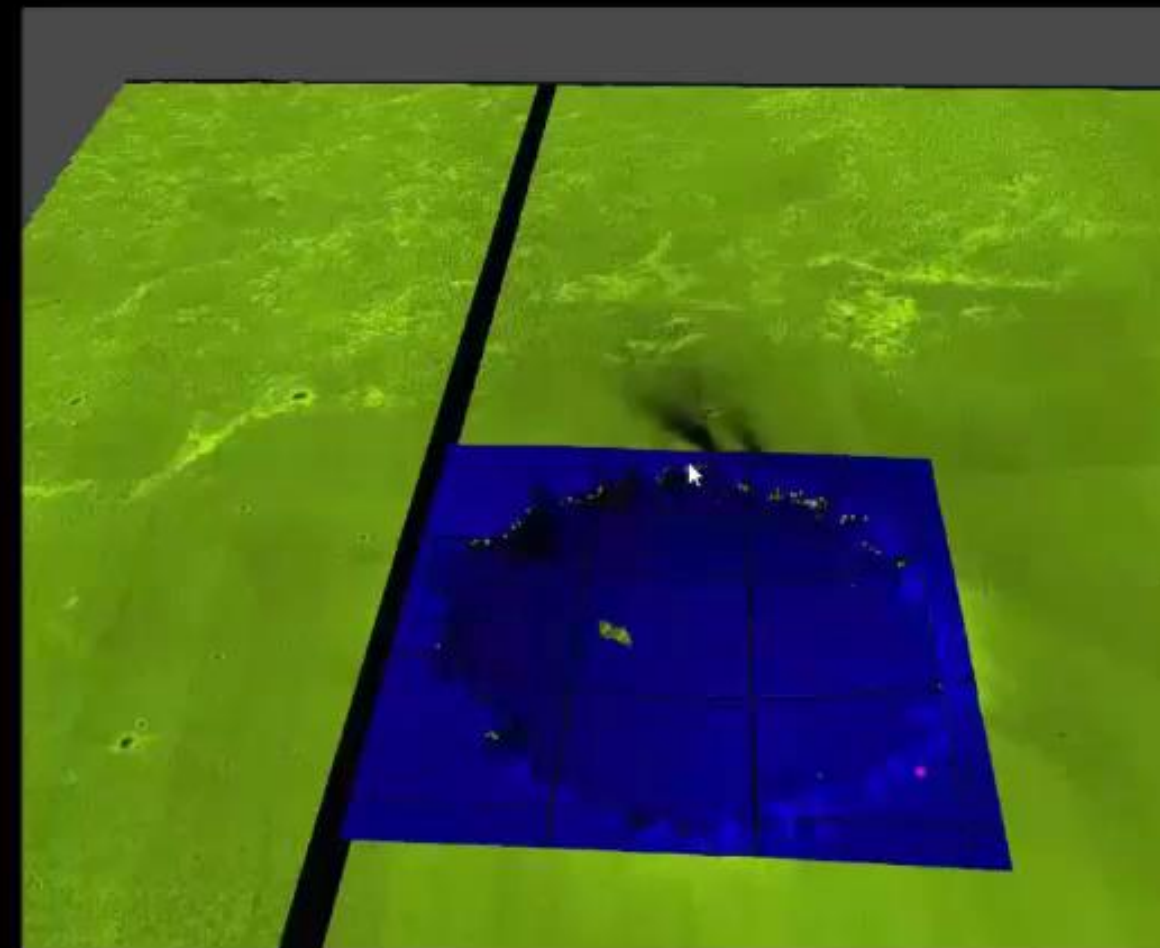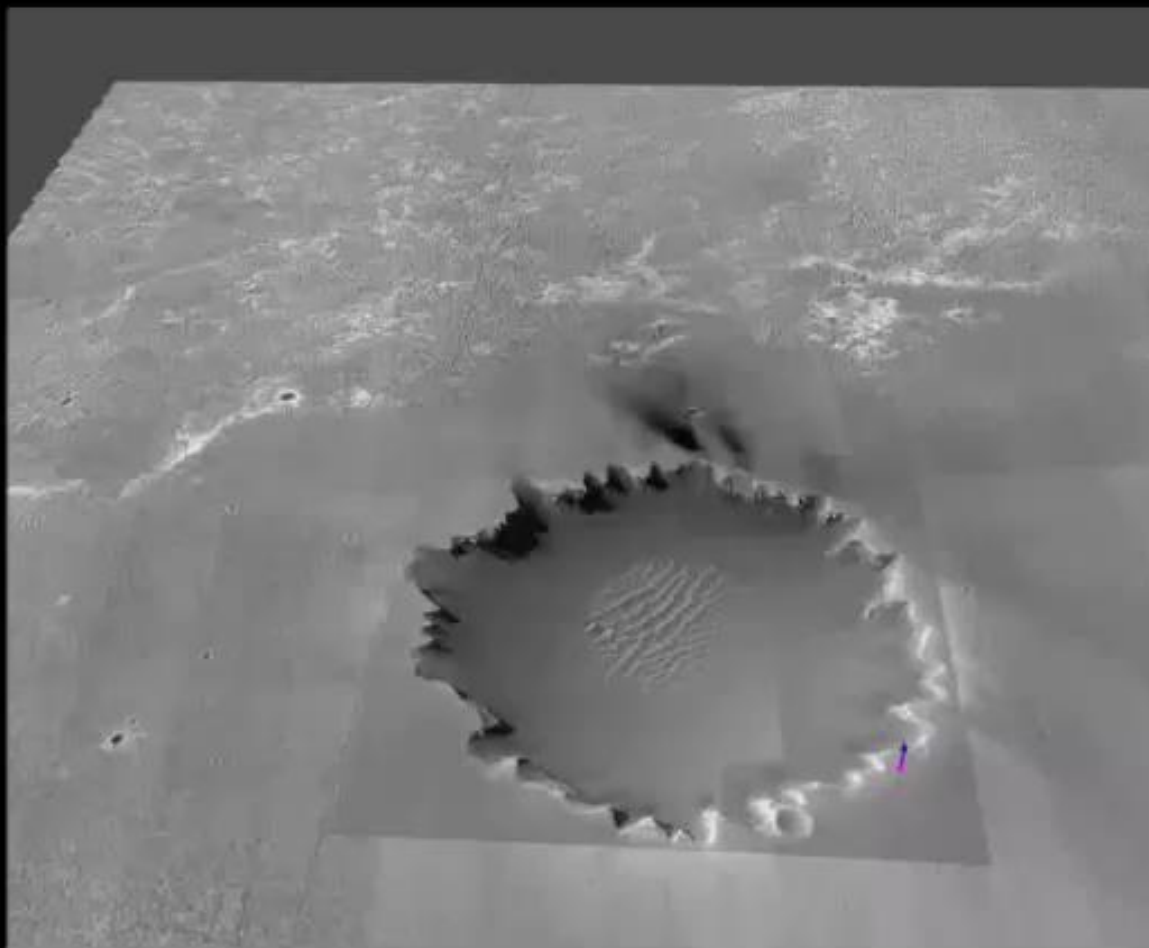

# Interaction in PRo3D: Geological Annotations


Geometry


Style

Text

Projection

Derived Values

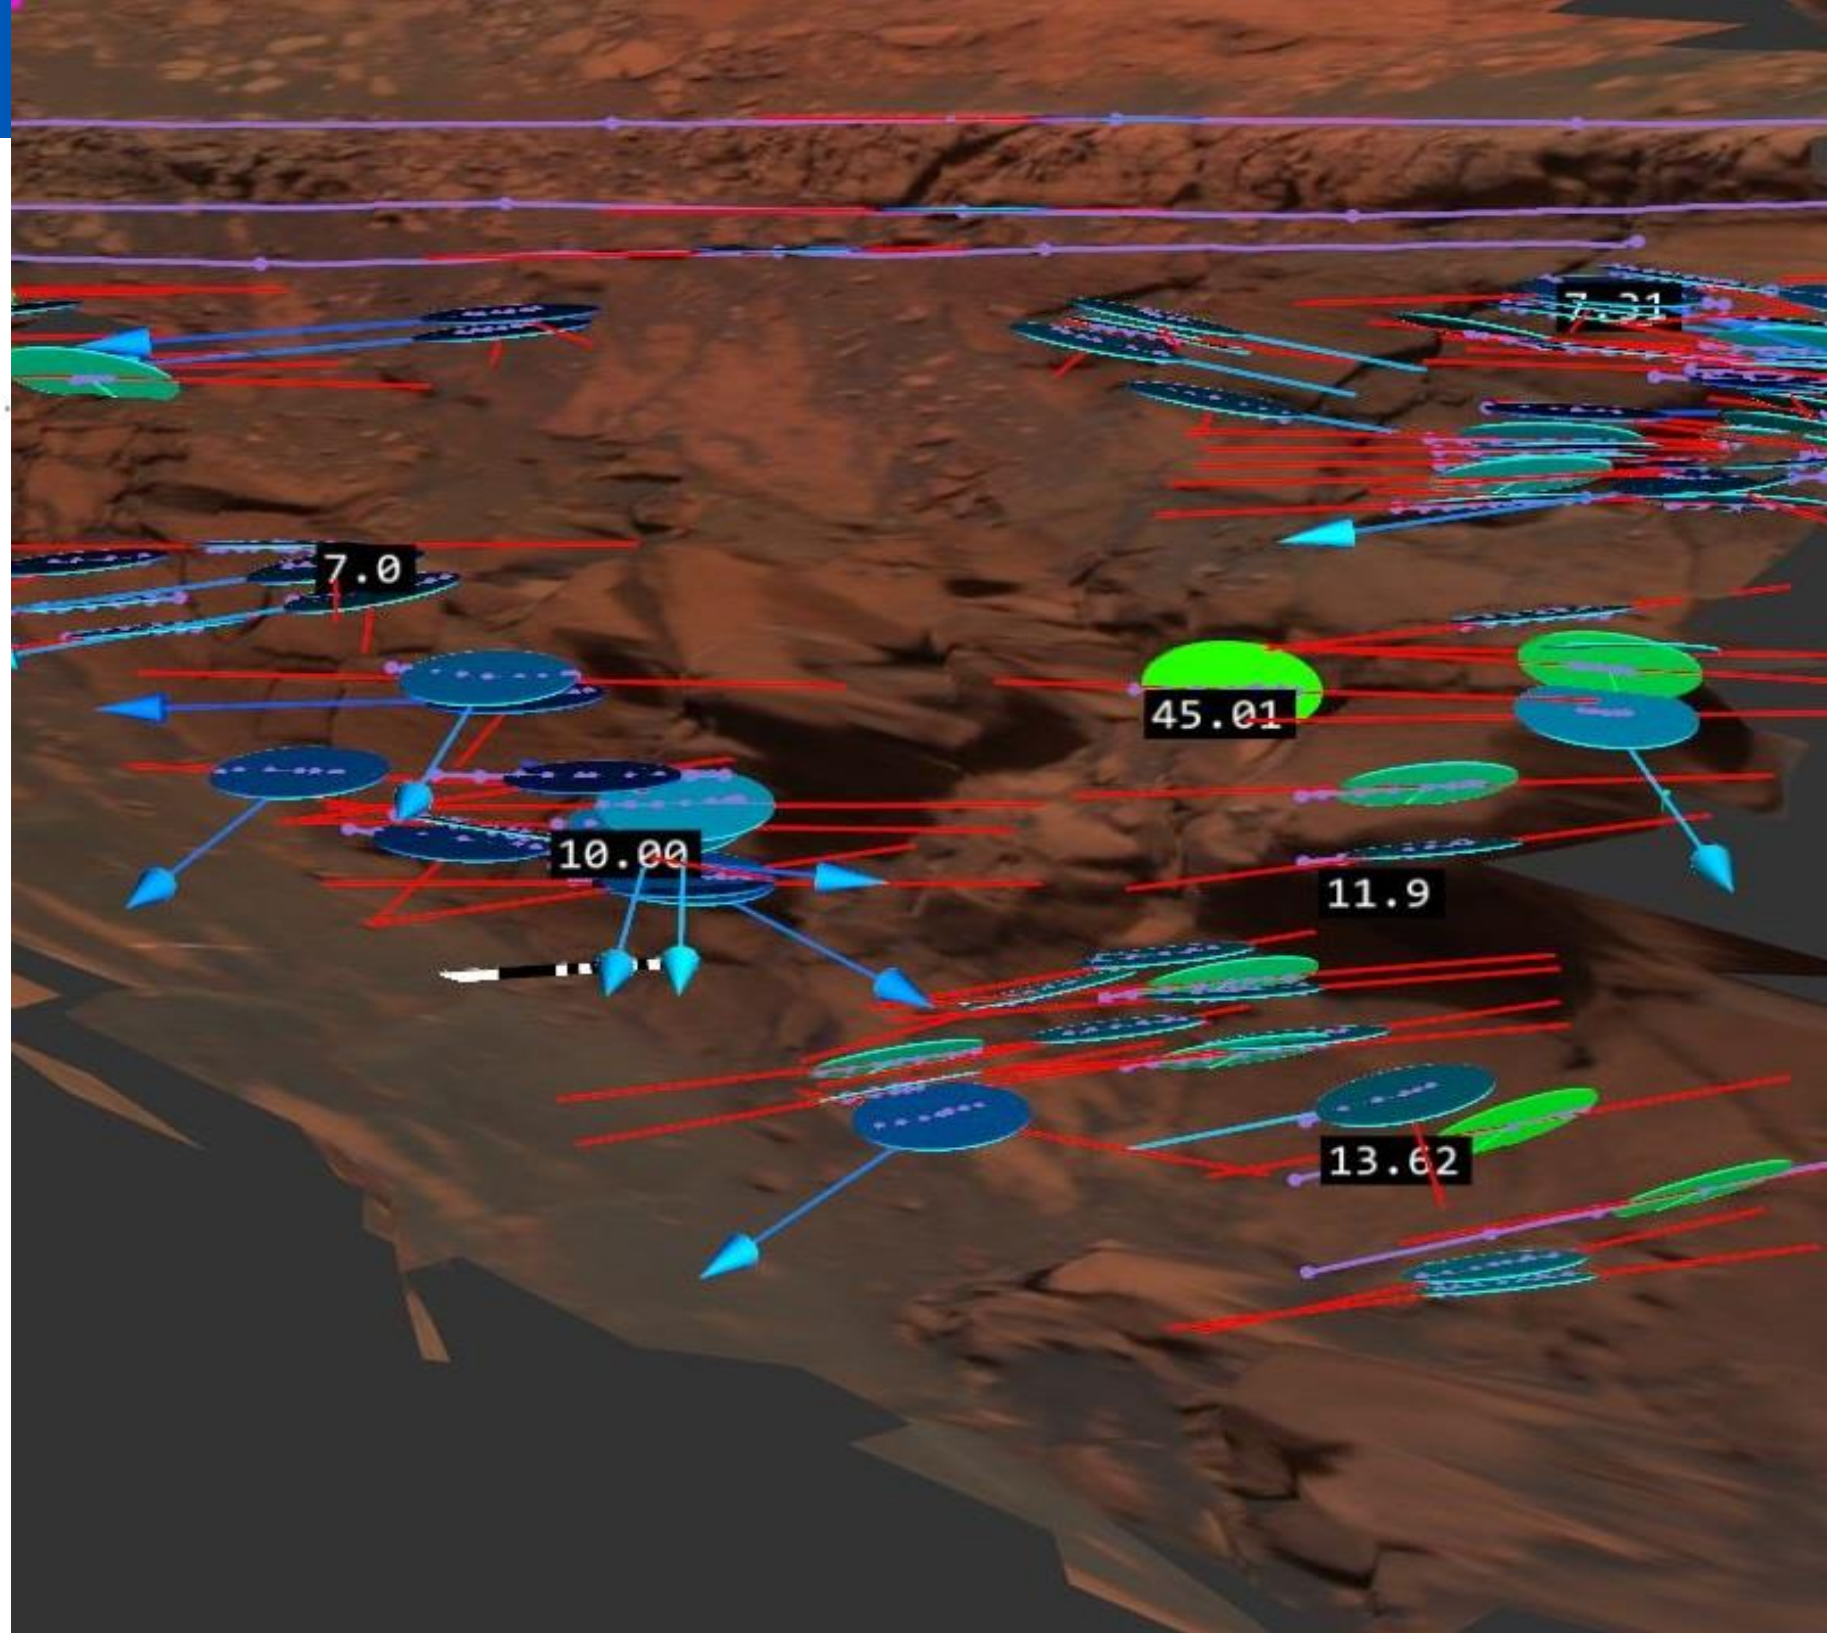

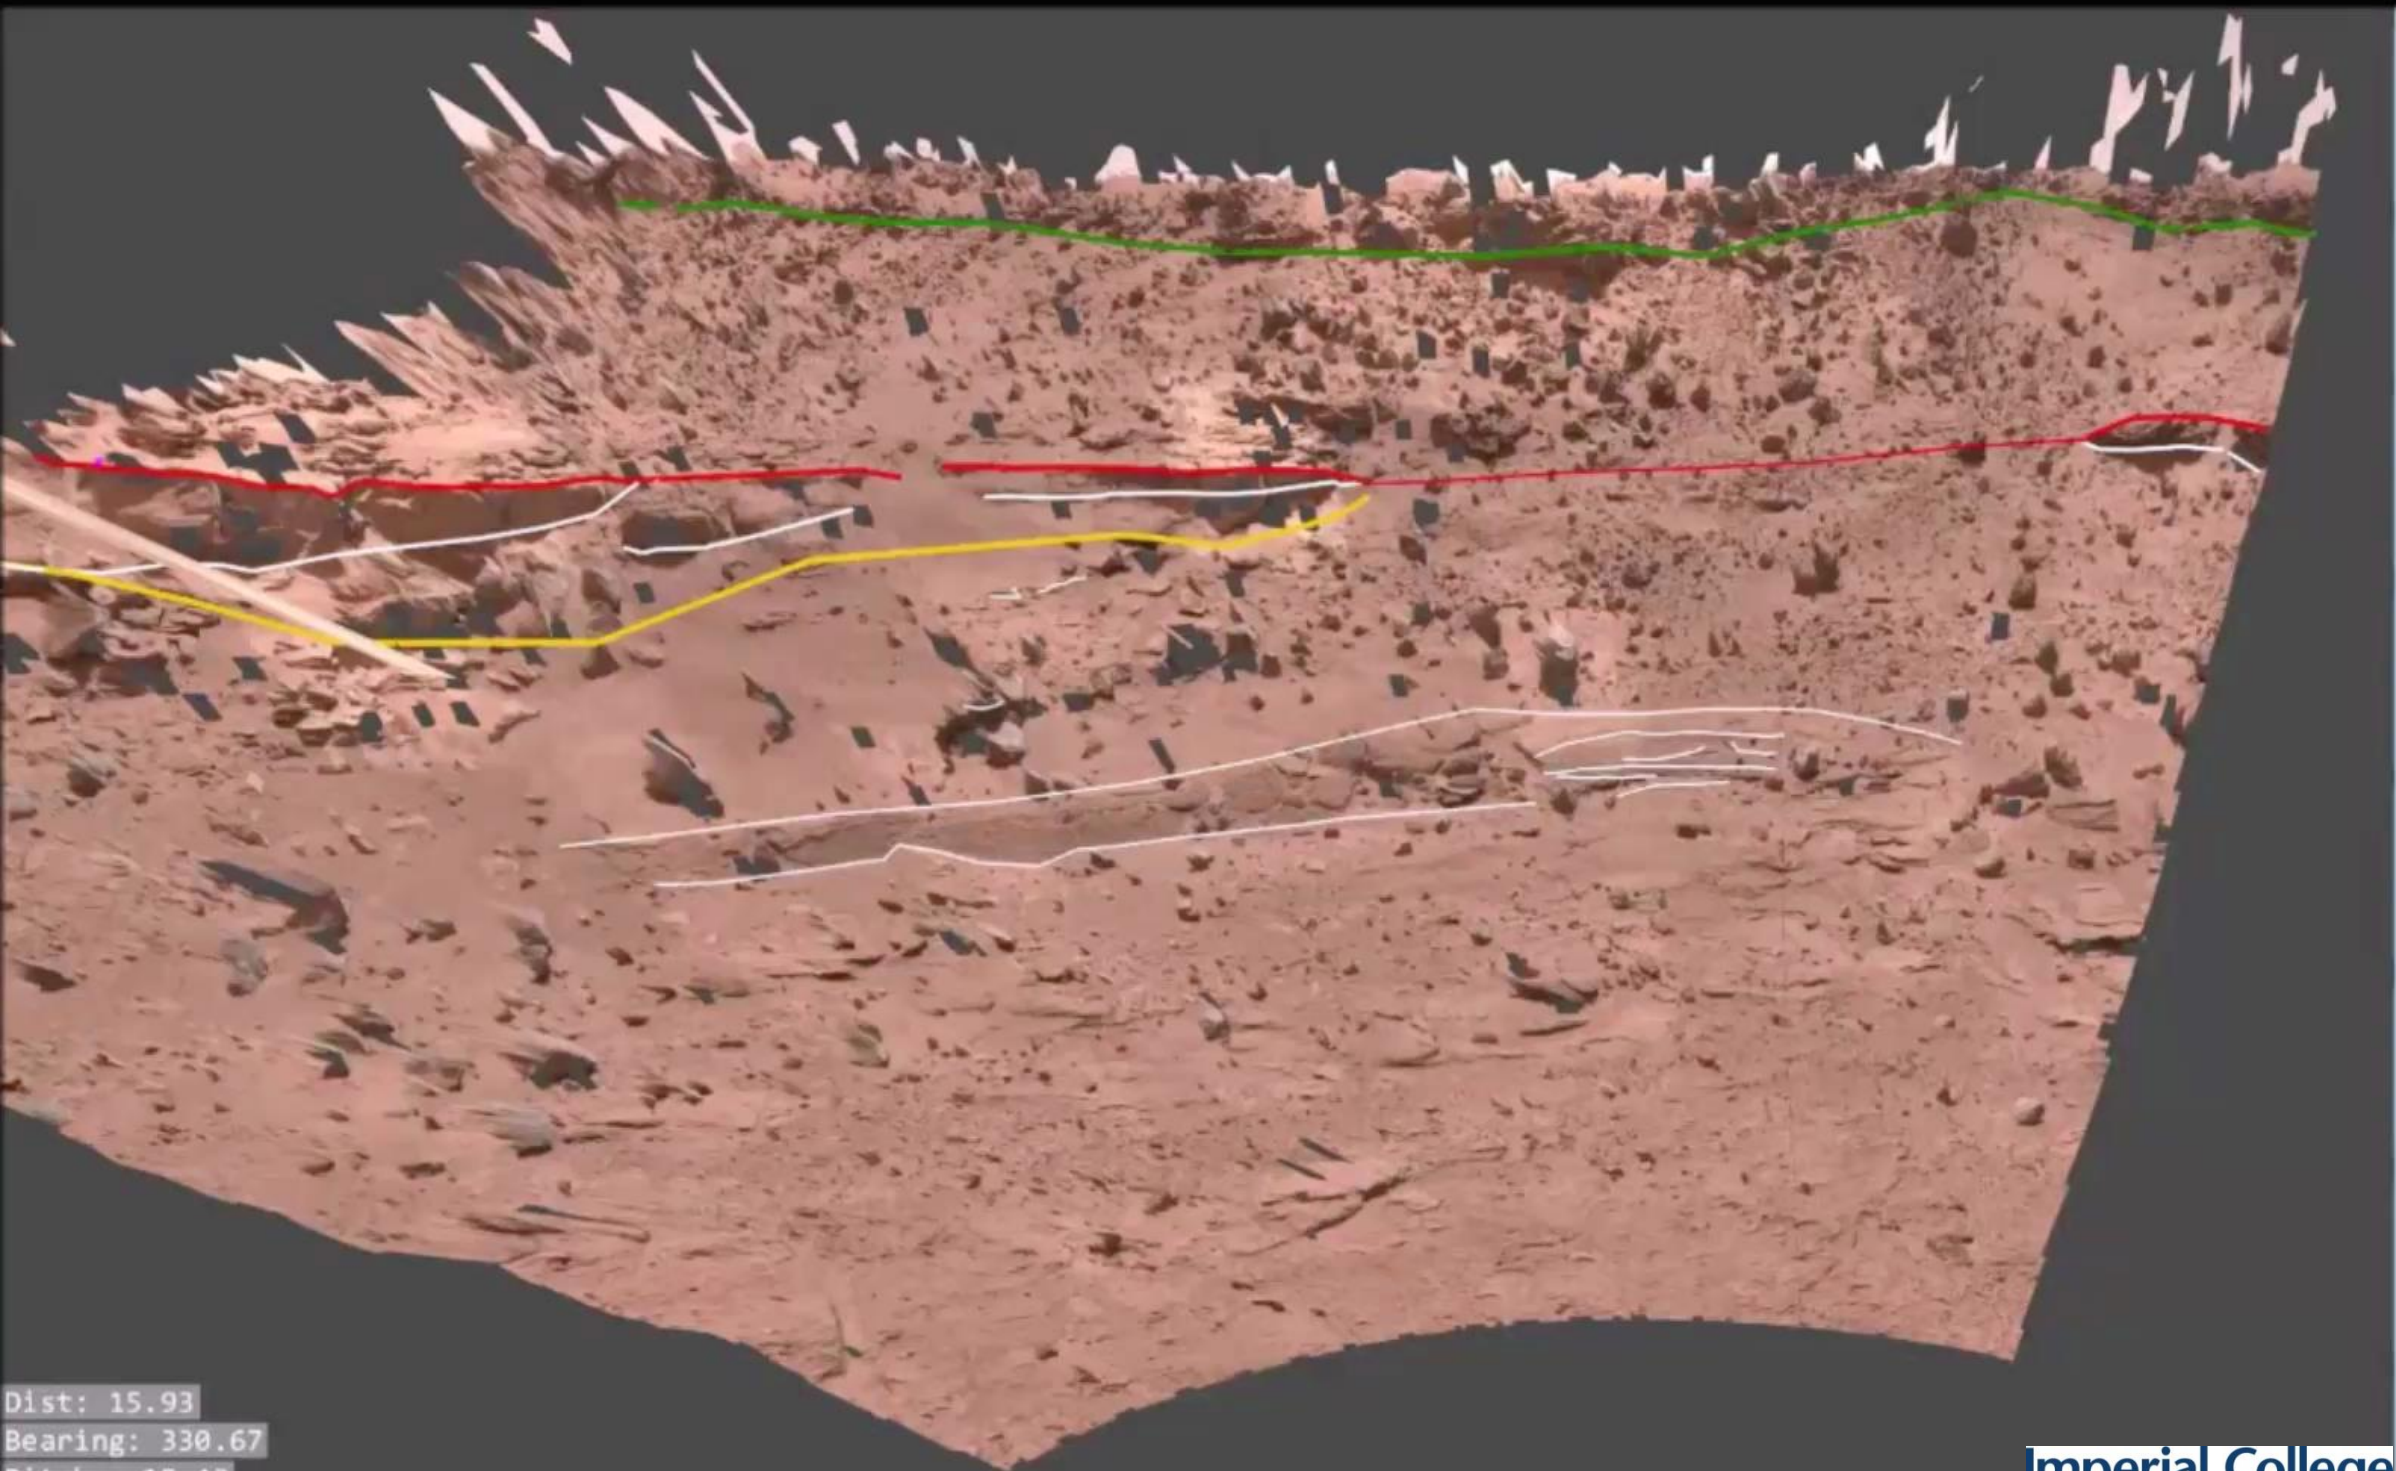

- WisdomScans
  - Bookmarks
  - Lighting
  - Trajectories
  - ExomarsViewConfig
  - RoverViewPlans
  - Measurements
    - Dimensions
    - Labels
    - Strat\_units
    - Sed\_Structure\_delin
    - Dip\_Strike\_Bedding
    - Dip\_Strike\_Bedding
    - Bed\_Th
    - Grain\_S
- Set Active
  - Add new Group
  - Delete Group
  - Clear Measurements
  - Enable/Disable Group


Dist: 15.93  
Bearing: 330.67  
Pitch: -15.43  
Pos: [-2488277.88, 2287713.01, -273602.86]

Imperial College  
London


Geologic  
Analysis  
Workflow

# Work in Progress: Multiple Layers Data Structures & Rendering

Multiple Textures

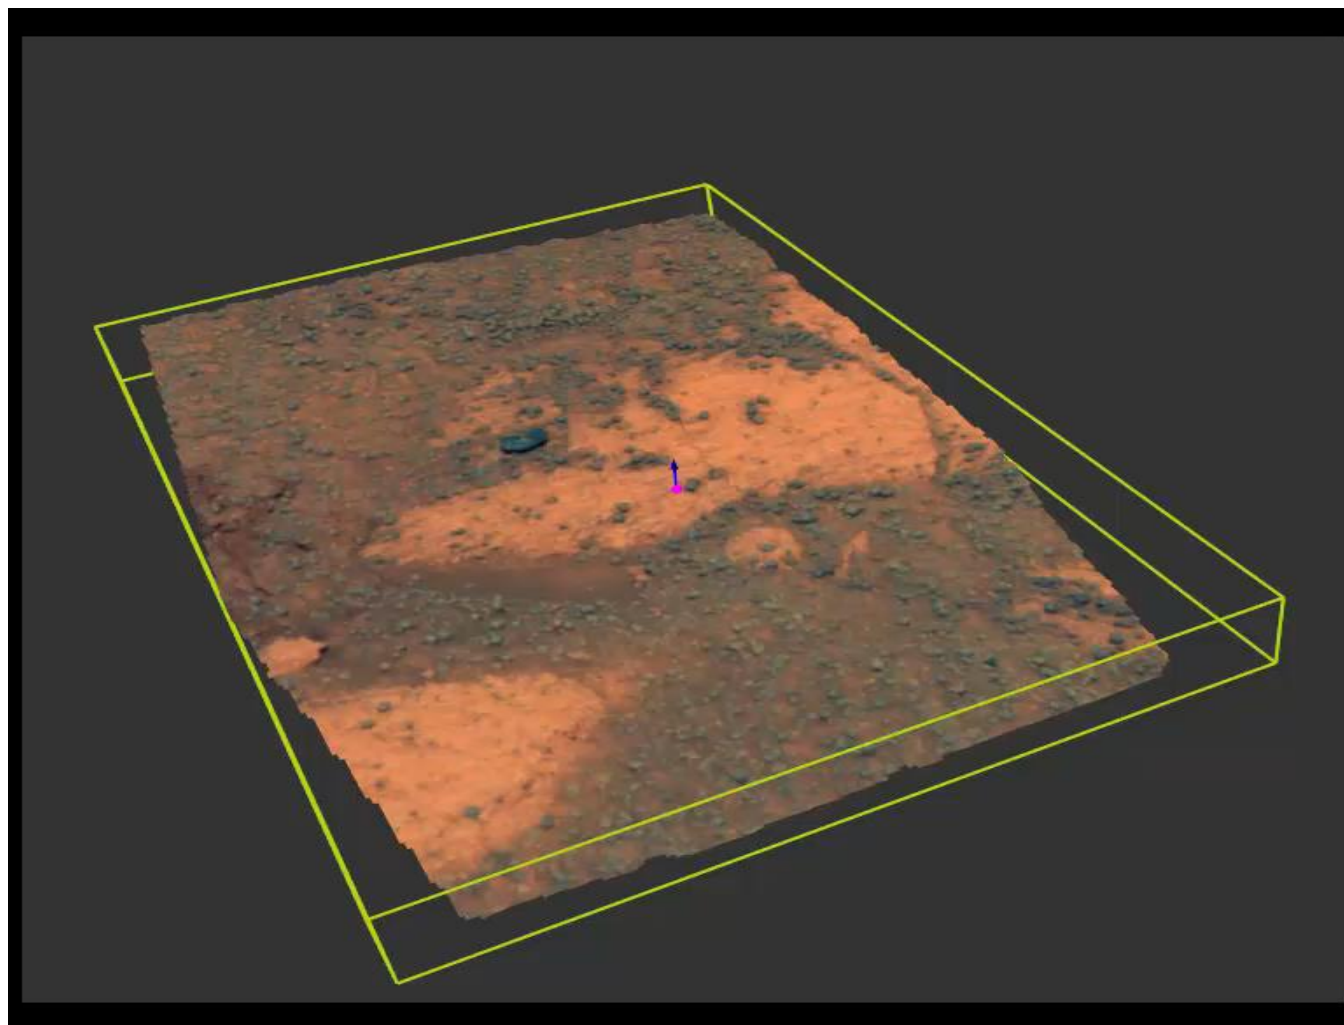

Attribute Layer

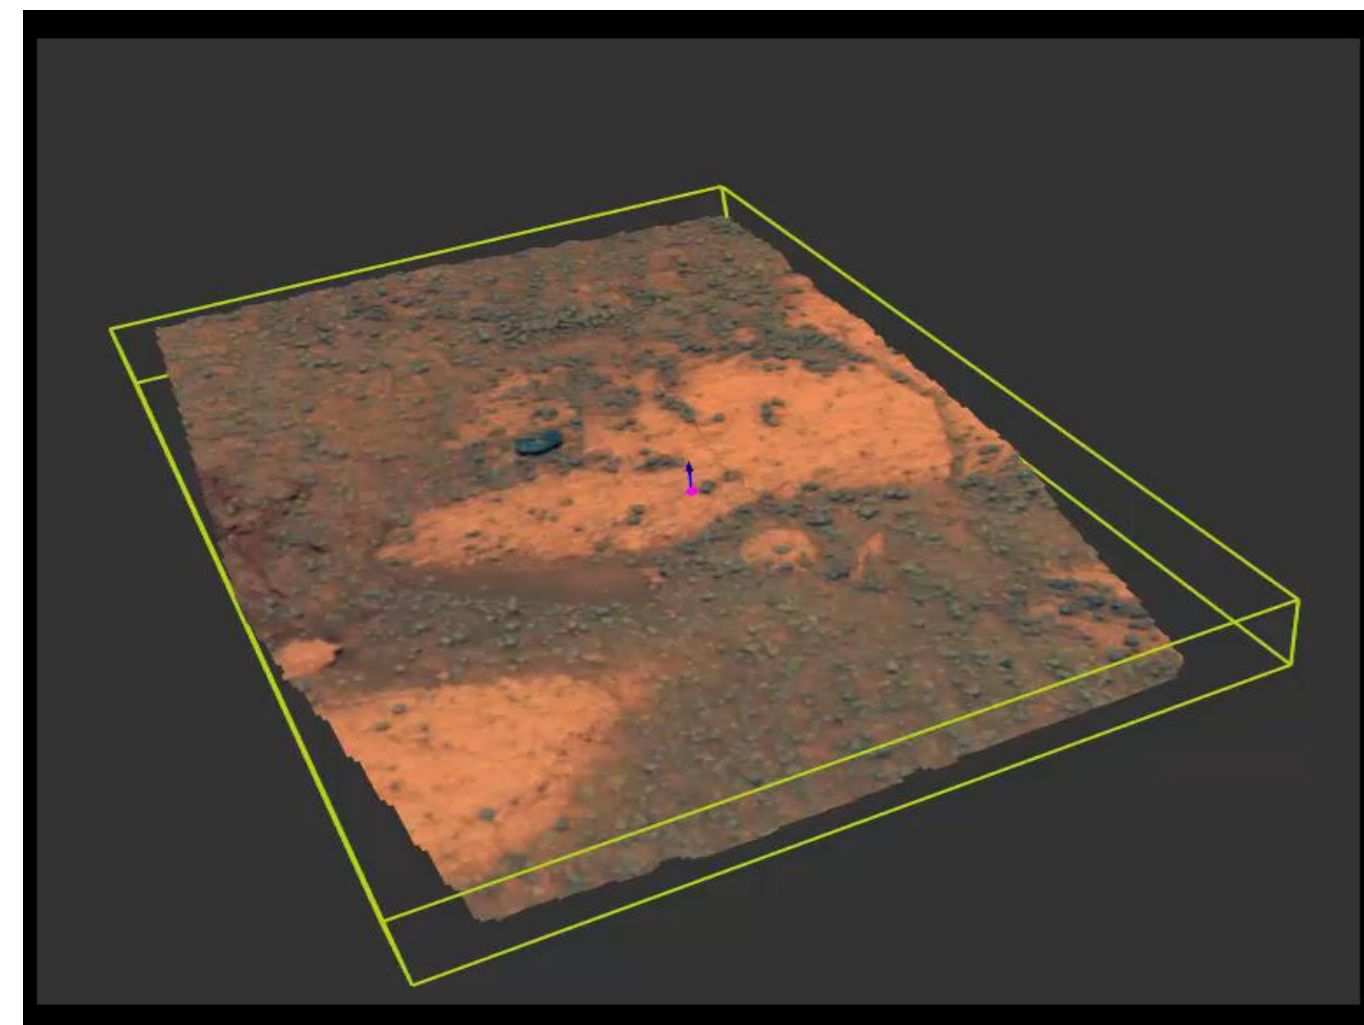


- Geometric model & FoV / footprint of an instrument-carrying platform (eg. rover)
  - WISDOM
  - Drill & CLUPI
  - ISEM, TSPP, ....
- Moving camera
- Generic interface
  - Allows defining mirror views as additional instrument option
- Platform geometry and instrument characteristics are defined in xml file
- Interface: C functions and structs (can be used with C++, C#, Python, ...)

# InstrumentPlatforms.dll – PRo3D Robotic Interface

```

<!-- Left Wide Angle Camera (AUPE), as calibrated during SAFER field trial in Chile -->
<WACL_AUPE>
  <!-- AUPE WAC camera specifications:
  Sensor Resolution: 2452 x 2056. Pixel size: 3.54um. Sensor size: 8.45x7.09mm. focal length: 12mm. as
  39"x33". -->
  <Intrinsics>
    <!-- image dimensions in px (PRO3D: for correct image size rendering) -->
    <Resolution>1024, 1024</Resolution><!-- binning! -->
    <ZoomStep>
      <!-- focal length in mm (PRO3D: as user information) -->
      <FocalLength>12</FocalLength>
    <Filter>
      <!-- filter id -->
      <FilterID>all</FilterID>
      <!-- Focal lengths per pixel (PRO3D: optional/not used) -->
      <FocalLengthPx>1302, 911, 1302, 911</FocalLengthPx>
      <!-- angle (gon) for camera horizontal FoV -->
      <HorizontalFoV>37.000</HorizontalFoV> <!-- adapted with respect to reduced sensor size -->
      <VerticalFoV>37.000</VerticalFoV> <!-- adapted with respect to reduced sensor size due to binning & cut offs for AUPE -->
      <!-- pixel coordinates of the principal point -->
      <PrinciplePoint>512, 512</PrinciplePoint>
      <GeometricDistortion>
        <Method></Method>
        <!-- tangential & radial distortion coefficients -->
        <Coefficients></Coefficients>
      </GeometricDistortion>
    </Filter>
  </ZoomStep>
</Intrinsics>
<RelativeOrientation>
  <ReferenceFrame>WACL_AUPE</ReferenceFrame>
  <!-- 3D camera coordinates (meters) -->
  <XYZPosition>0.000, 0.000, 0.000</XYZPosition>
  <!-- 3D components of the camera up vector -->
  <CamUpVector>0.000, 0.000, 1.000</CamUpVector>
  <!-- 3D components of the camera look at vector -->
  <CamLookAtVector>1.000, 0.000, 0.000</CamLookAtVector>
  <BoundingBox>
    <Origin>0.000, 0.000, 0.000</Origin>

```

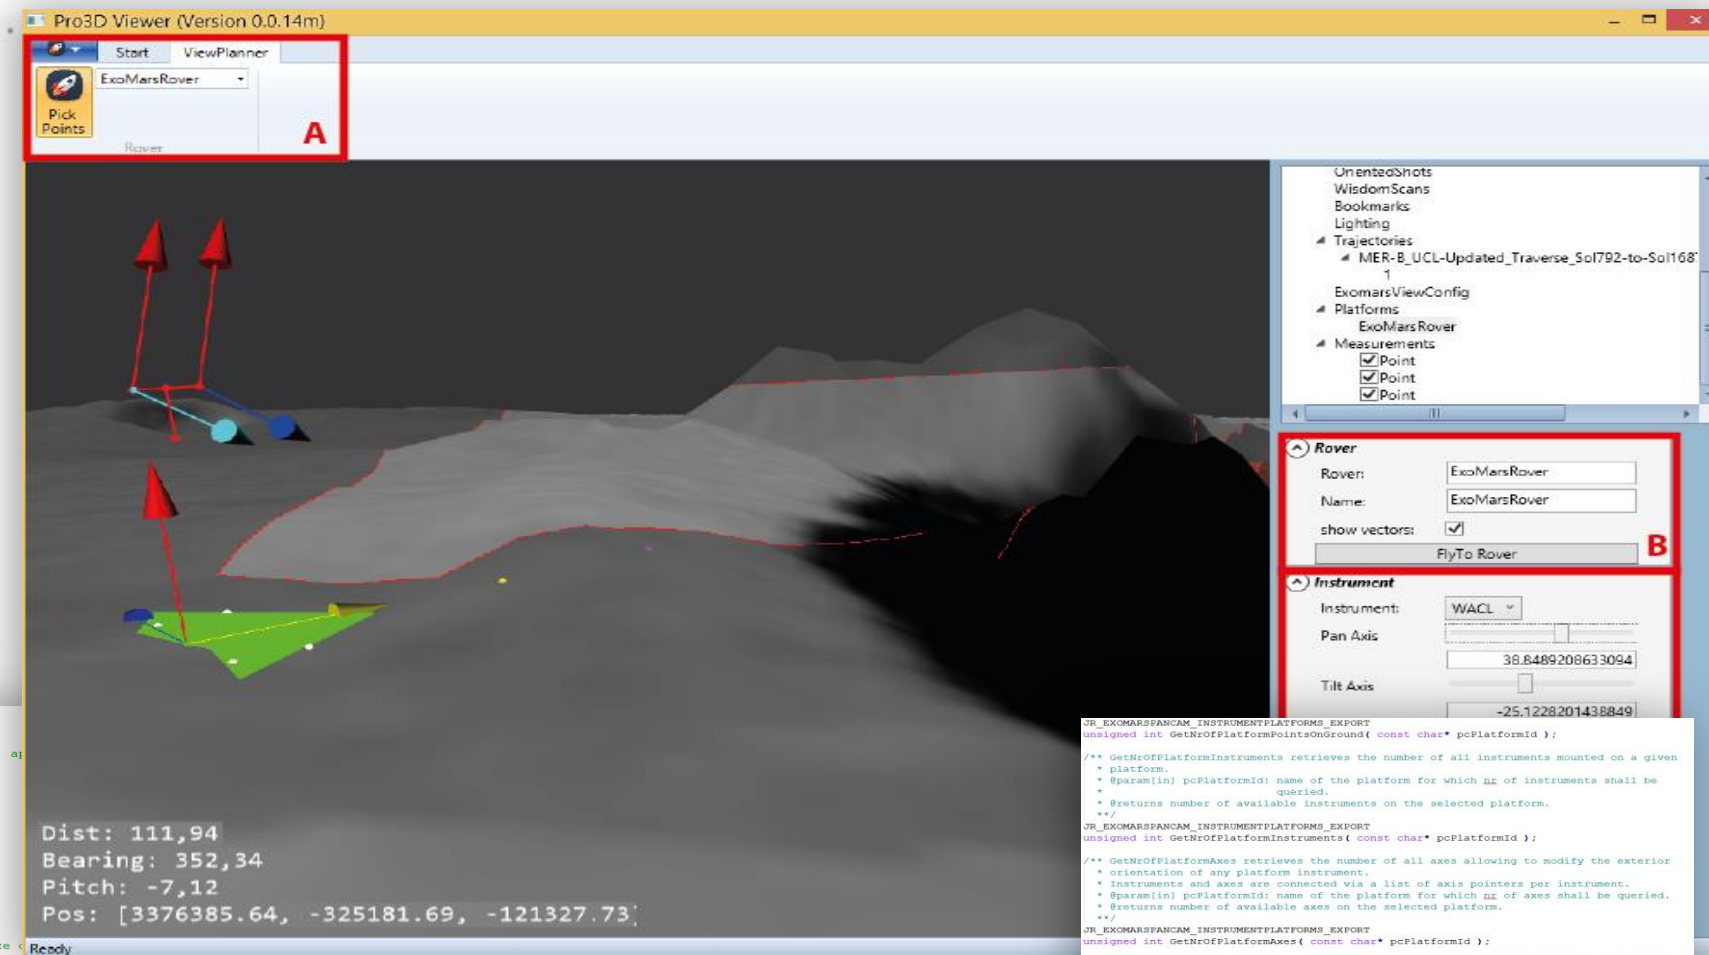

```

JR_EXOMARSPANCAM_INSTRUMENTPLATFORMS_EXPORT
unsigned int GetNrOfPlatformPointsOnGround( const char* pPlatformId );

/** GetNrOfPlatformInstruments retrieves the number of all instruments mounted on a given
 * platform.
 * @param[in] pPlatformId: name of the platform for which nr of instruments shall be
 * queried.
 * @returns number of available instruments on the selected platform.
 */

JR_EXOMARSPANCAM_INSTRUMENTPLATFORMS_EXPORT
unsigned int GetNrOfPlatformInstruments( const char* pPlatformId );

/** GetNrOfPlatformAxes retrieves the number of all axes allowing to modify the exterior
 * orientation of any platform instrument.
 * Instruments and axes are connected via a list of axis pointers per instrument.
 * @param[in] pPlatformId: name of the platform for which nr of axes shall be queried.
 * @returns number of available axes on the selected platform.
 */

JR_EXOMARSPANCAM_INSTRUMENTPLATFORMS_EXPORT
unsigned int GetNrOfPlatformAxes( const char* pPlatformId );

/** InitPlatform initializes all SPlatform "member" variables, esp. calculates the position
 * and orientation of all platform instruments according to the given initial position and
 * orientation of the platform in Ground Reference Frame.
 * Arrays in pPlatform must be pre-allocated!
 * @param[in] nrOfPlatformPointsOnGround: max. number of points on ground which
 * pPlatform can contain.
 * @param[in] nrOfPlatformInstruments: max. number of instruments which pPlatform can
 * contain.
 * @param[in] nrOfPlatformAxes: max. number of axes which pPlatform can contain.
 * @param[out] pPlatform: platform including all related data to be initialized.
 * @returns error code.
 */

JR_EXOMARSPANCAM_INSTRUMENTPLATFORMS_EXPORT
int InitPlatform( SPlatform* pPlatform, unsigned int nrOfPlatformPointsOnGround,
  unsigned int nrOfPlatformInstruments, unsigned int nrOfPlatformAxes );


/** UpdatePlatform updates all SPlatform "member" variables - esp. the position and
 * orientation of all platform instruments - according to the given position and
 * orientation of the platform. It also updates intrinsics of instruments with
 * zooming capability according to the currently set focal length.
 * @param[out] pPlatform: platform including all related data to be updated.
 * @returns error code.
 */

JR_EXOMARSPANCAM_INSTRUMENTPLATFORMS_EXPORT int UpdatePlatform( SPlatform* pPlatform );


```

• • • • •


- **Simulate views**
  - **Cameras**
  - **Footprints of Instruments**
- **Bounding box projected onto Planet DTM / Ortho**
- **Dynamic / interactive display for planning**
  - **I/O of pointing angles**

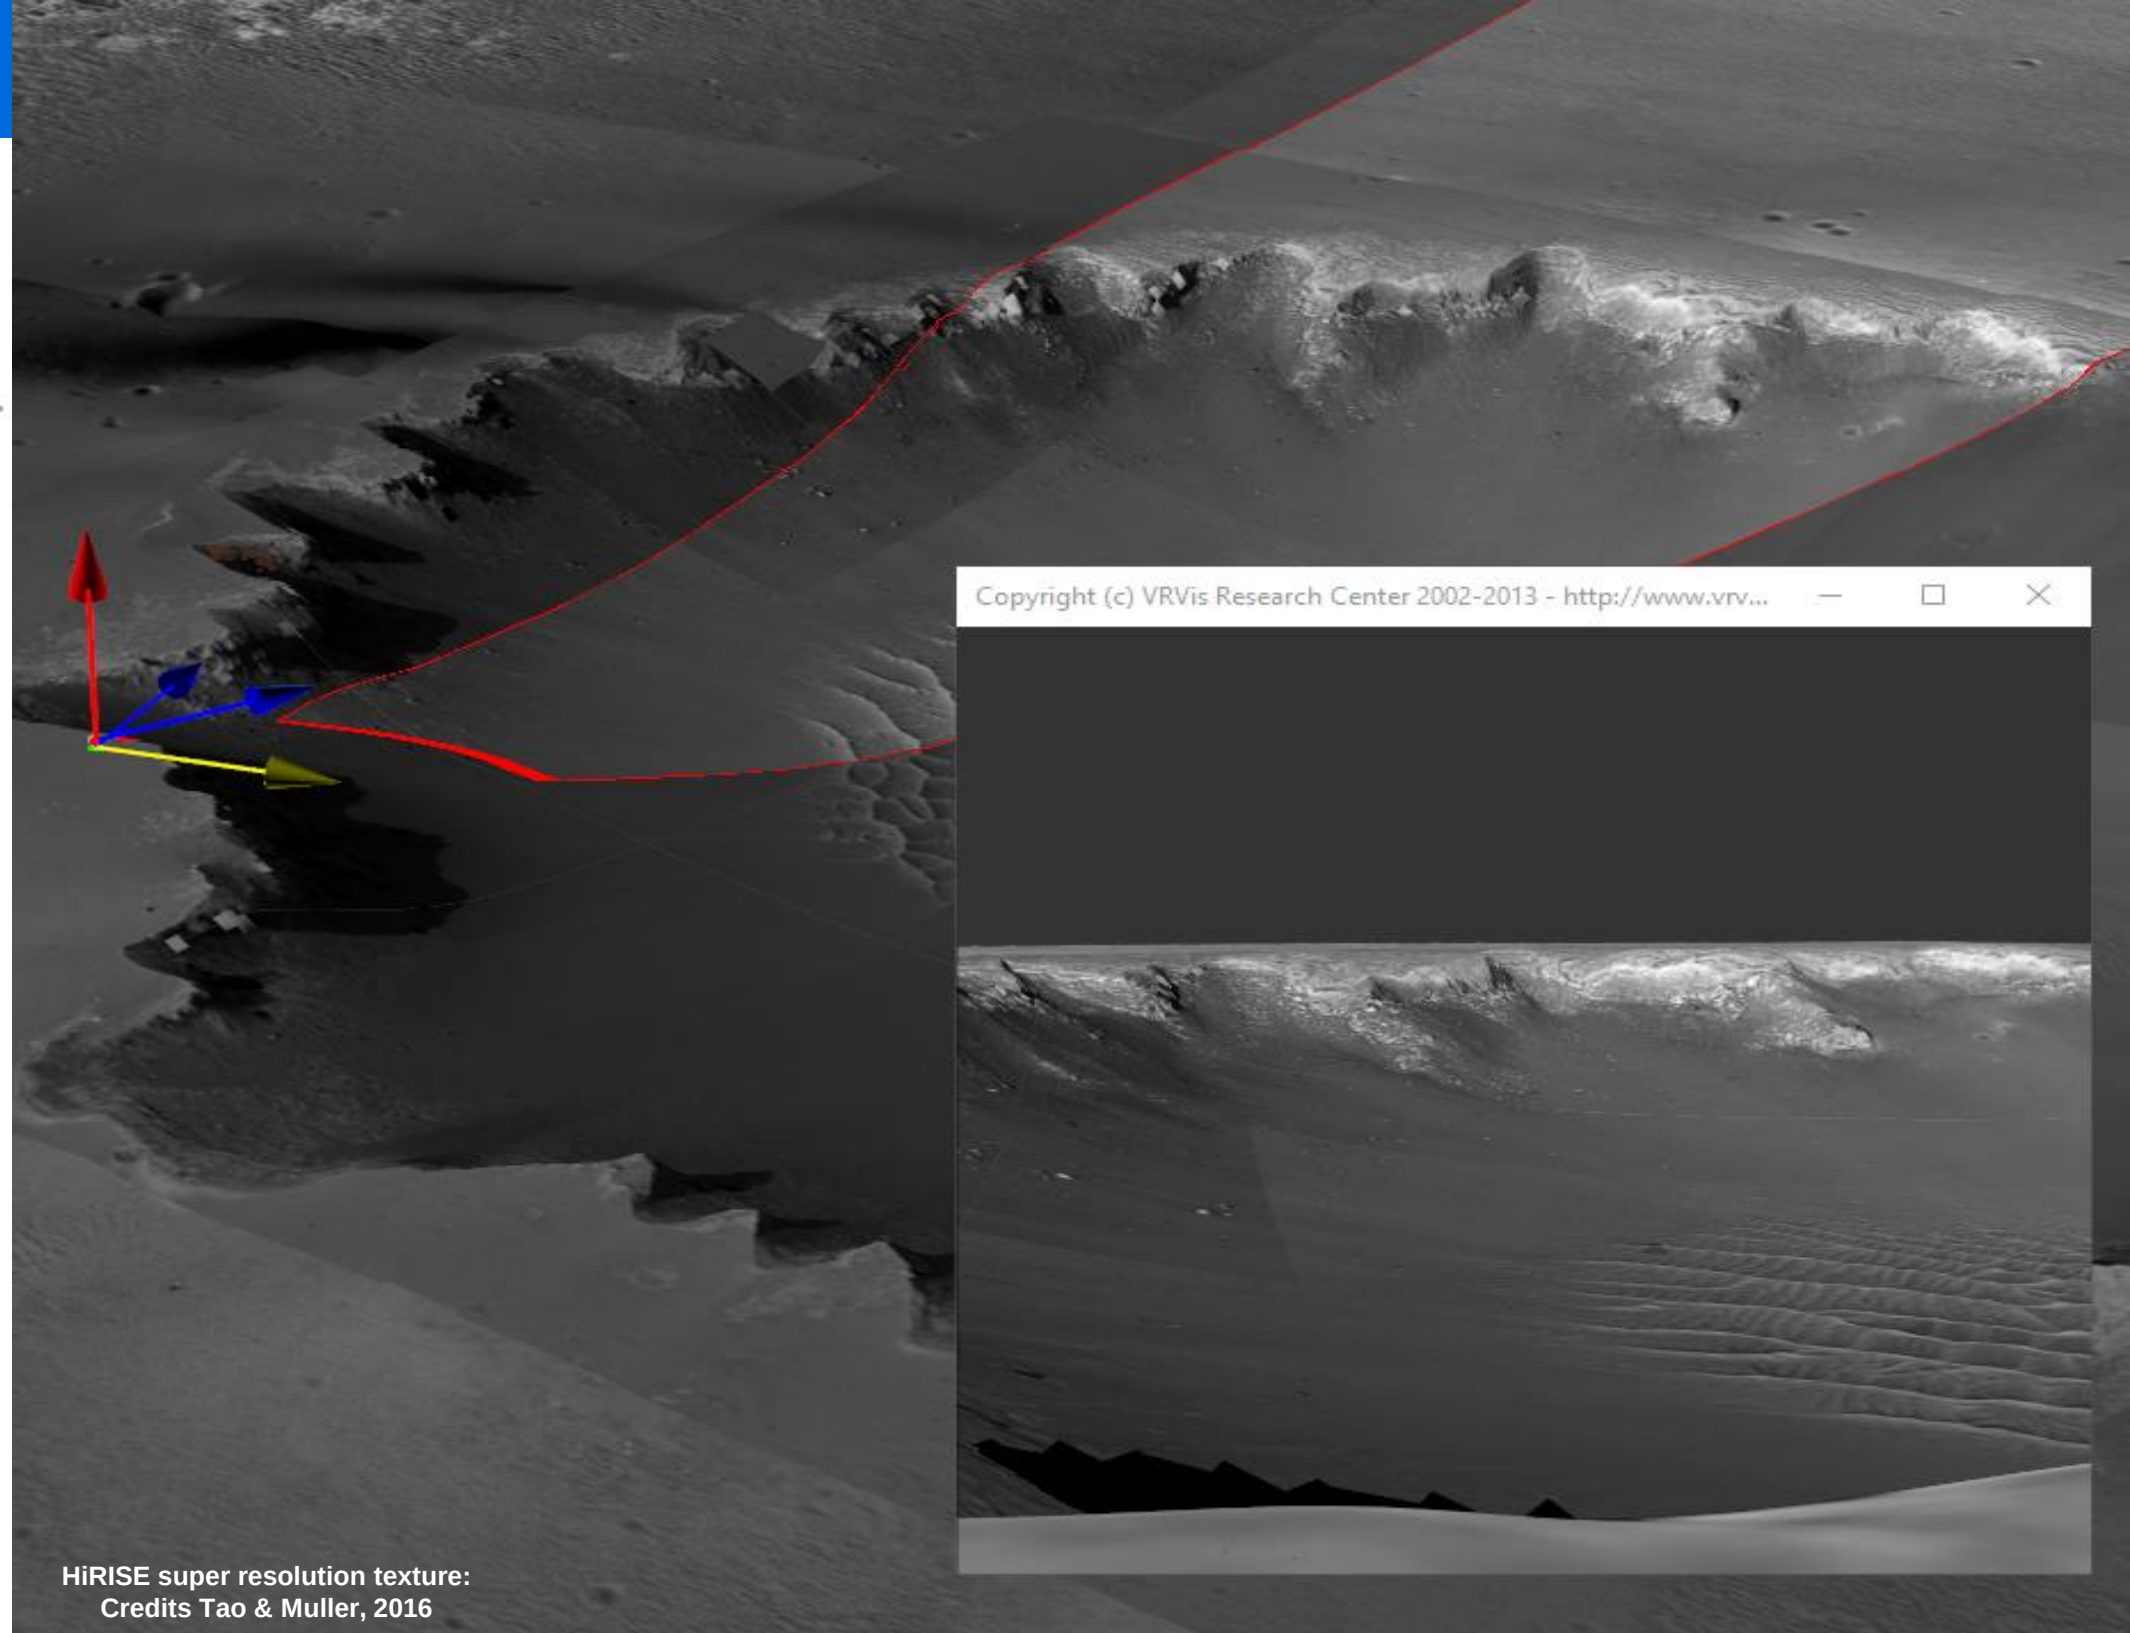


HiRISE super resolution texture:  
Credits Tao & Muller, 2016

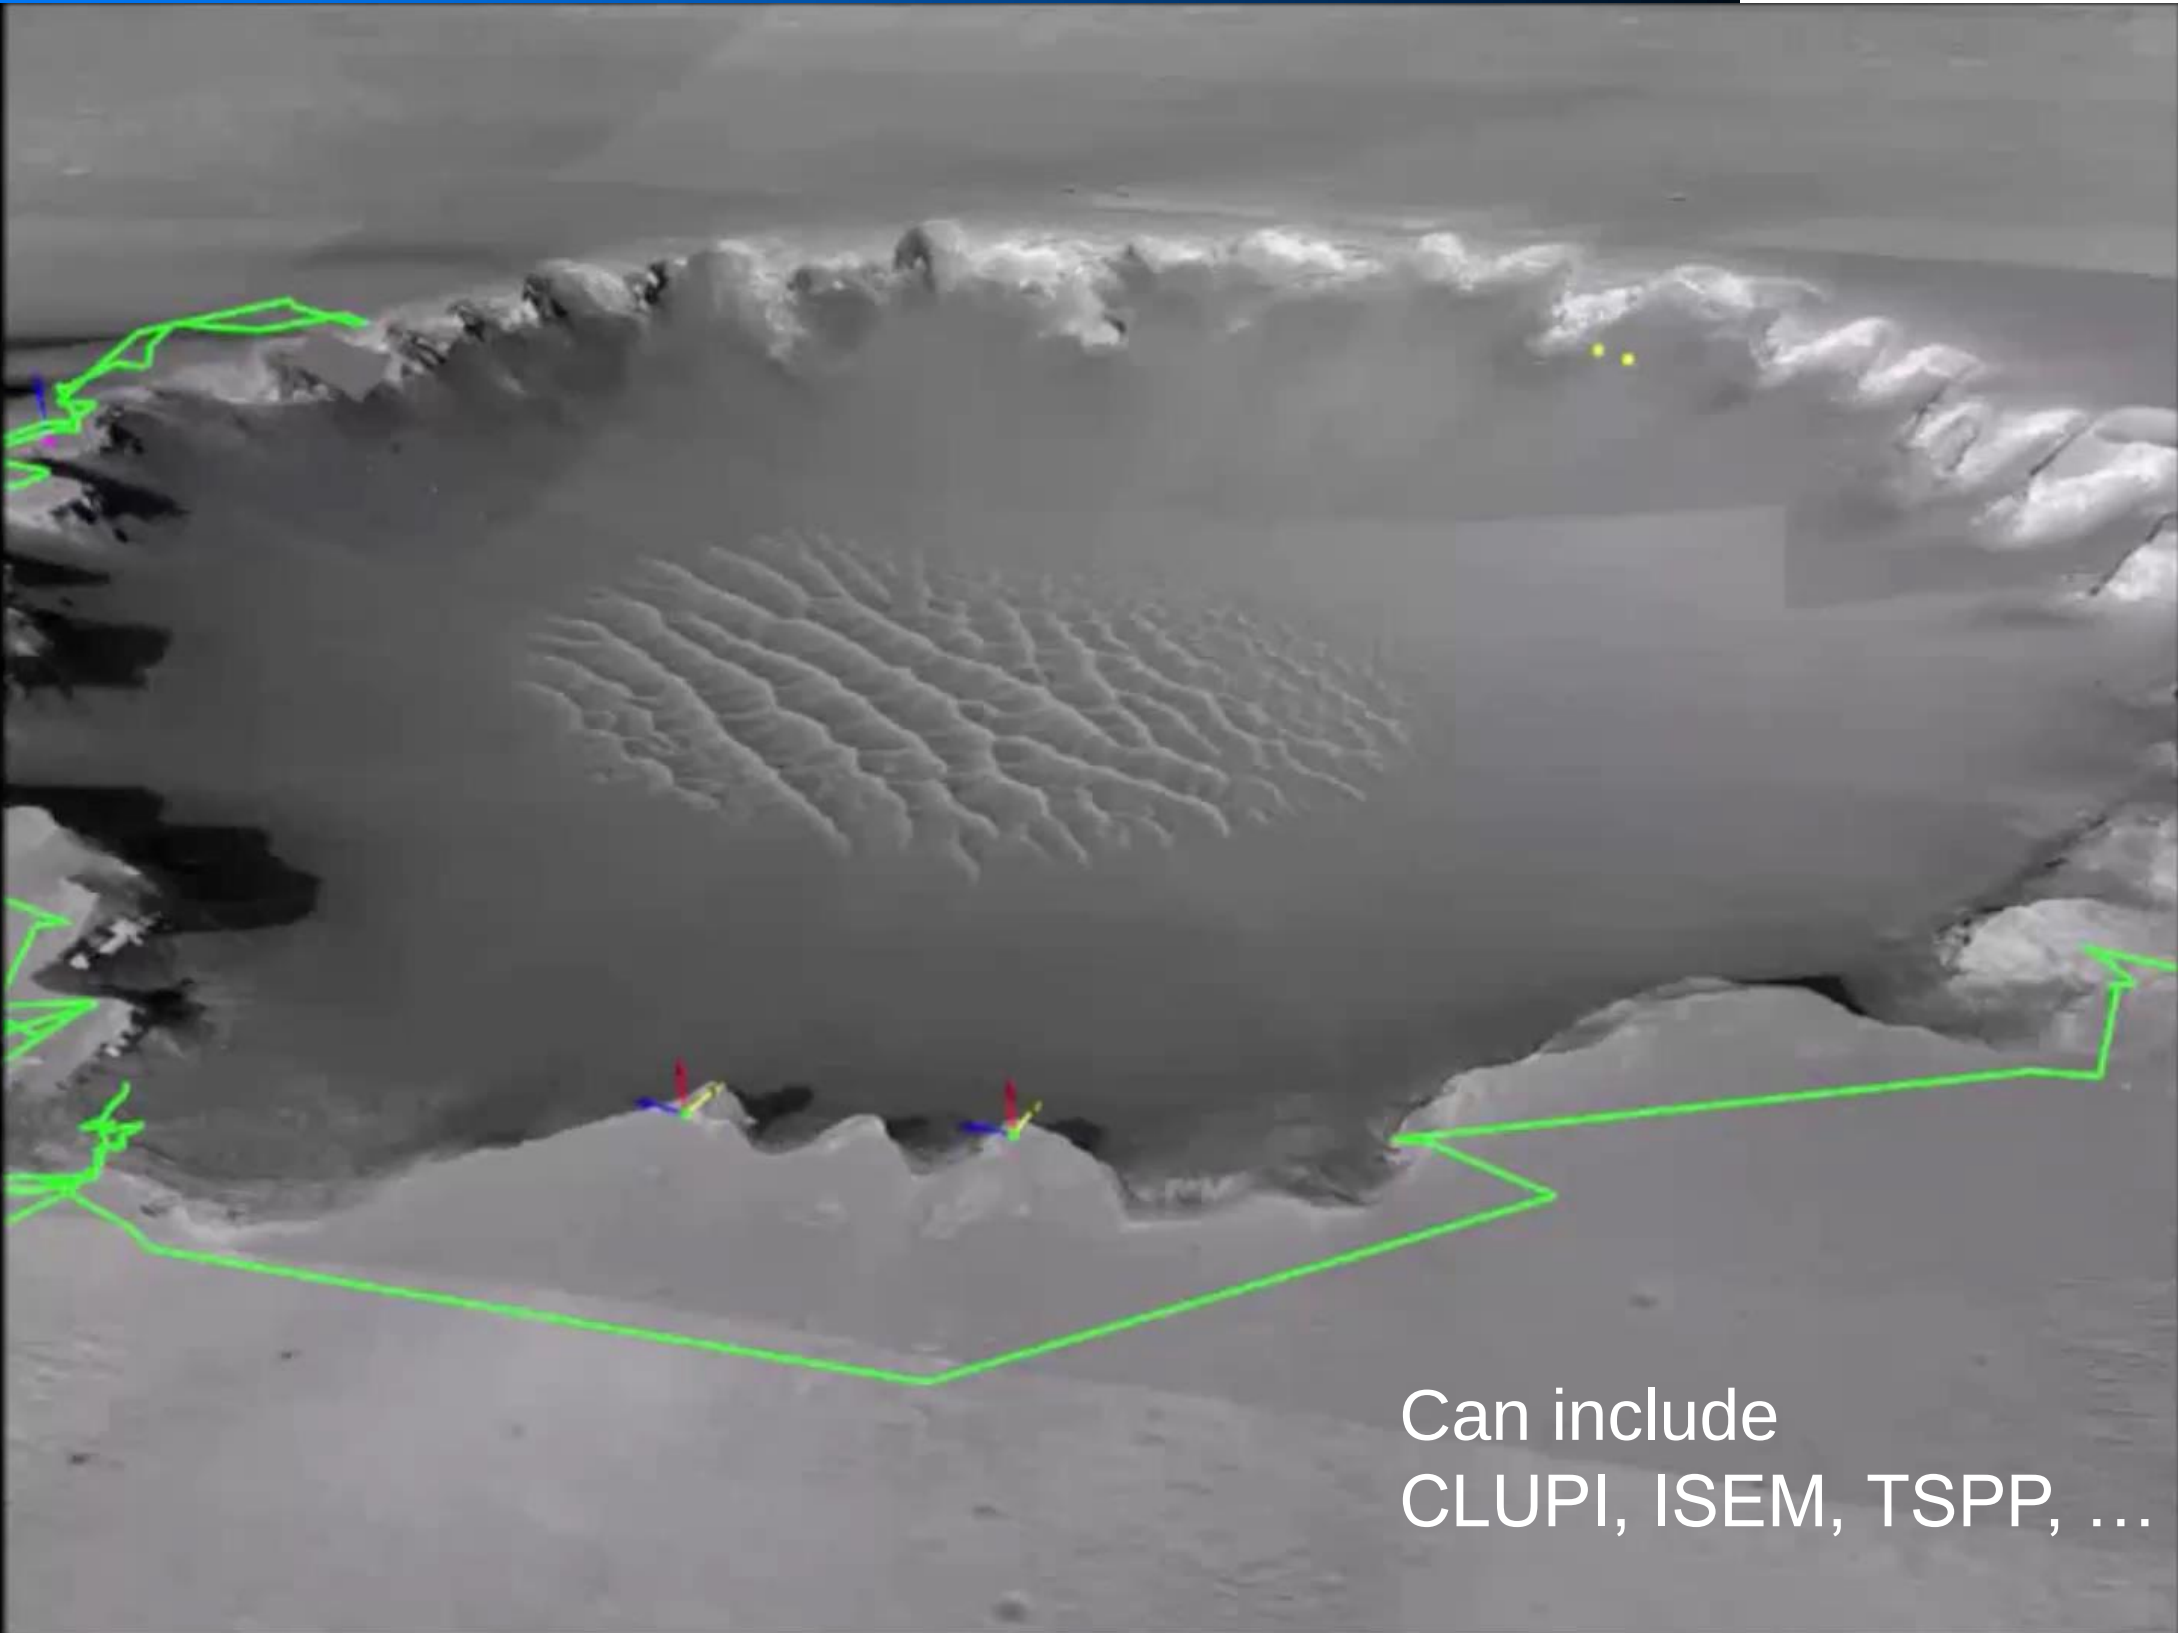

Can include  
CLUPI, ISEM, TSPP, ...

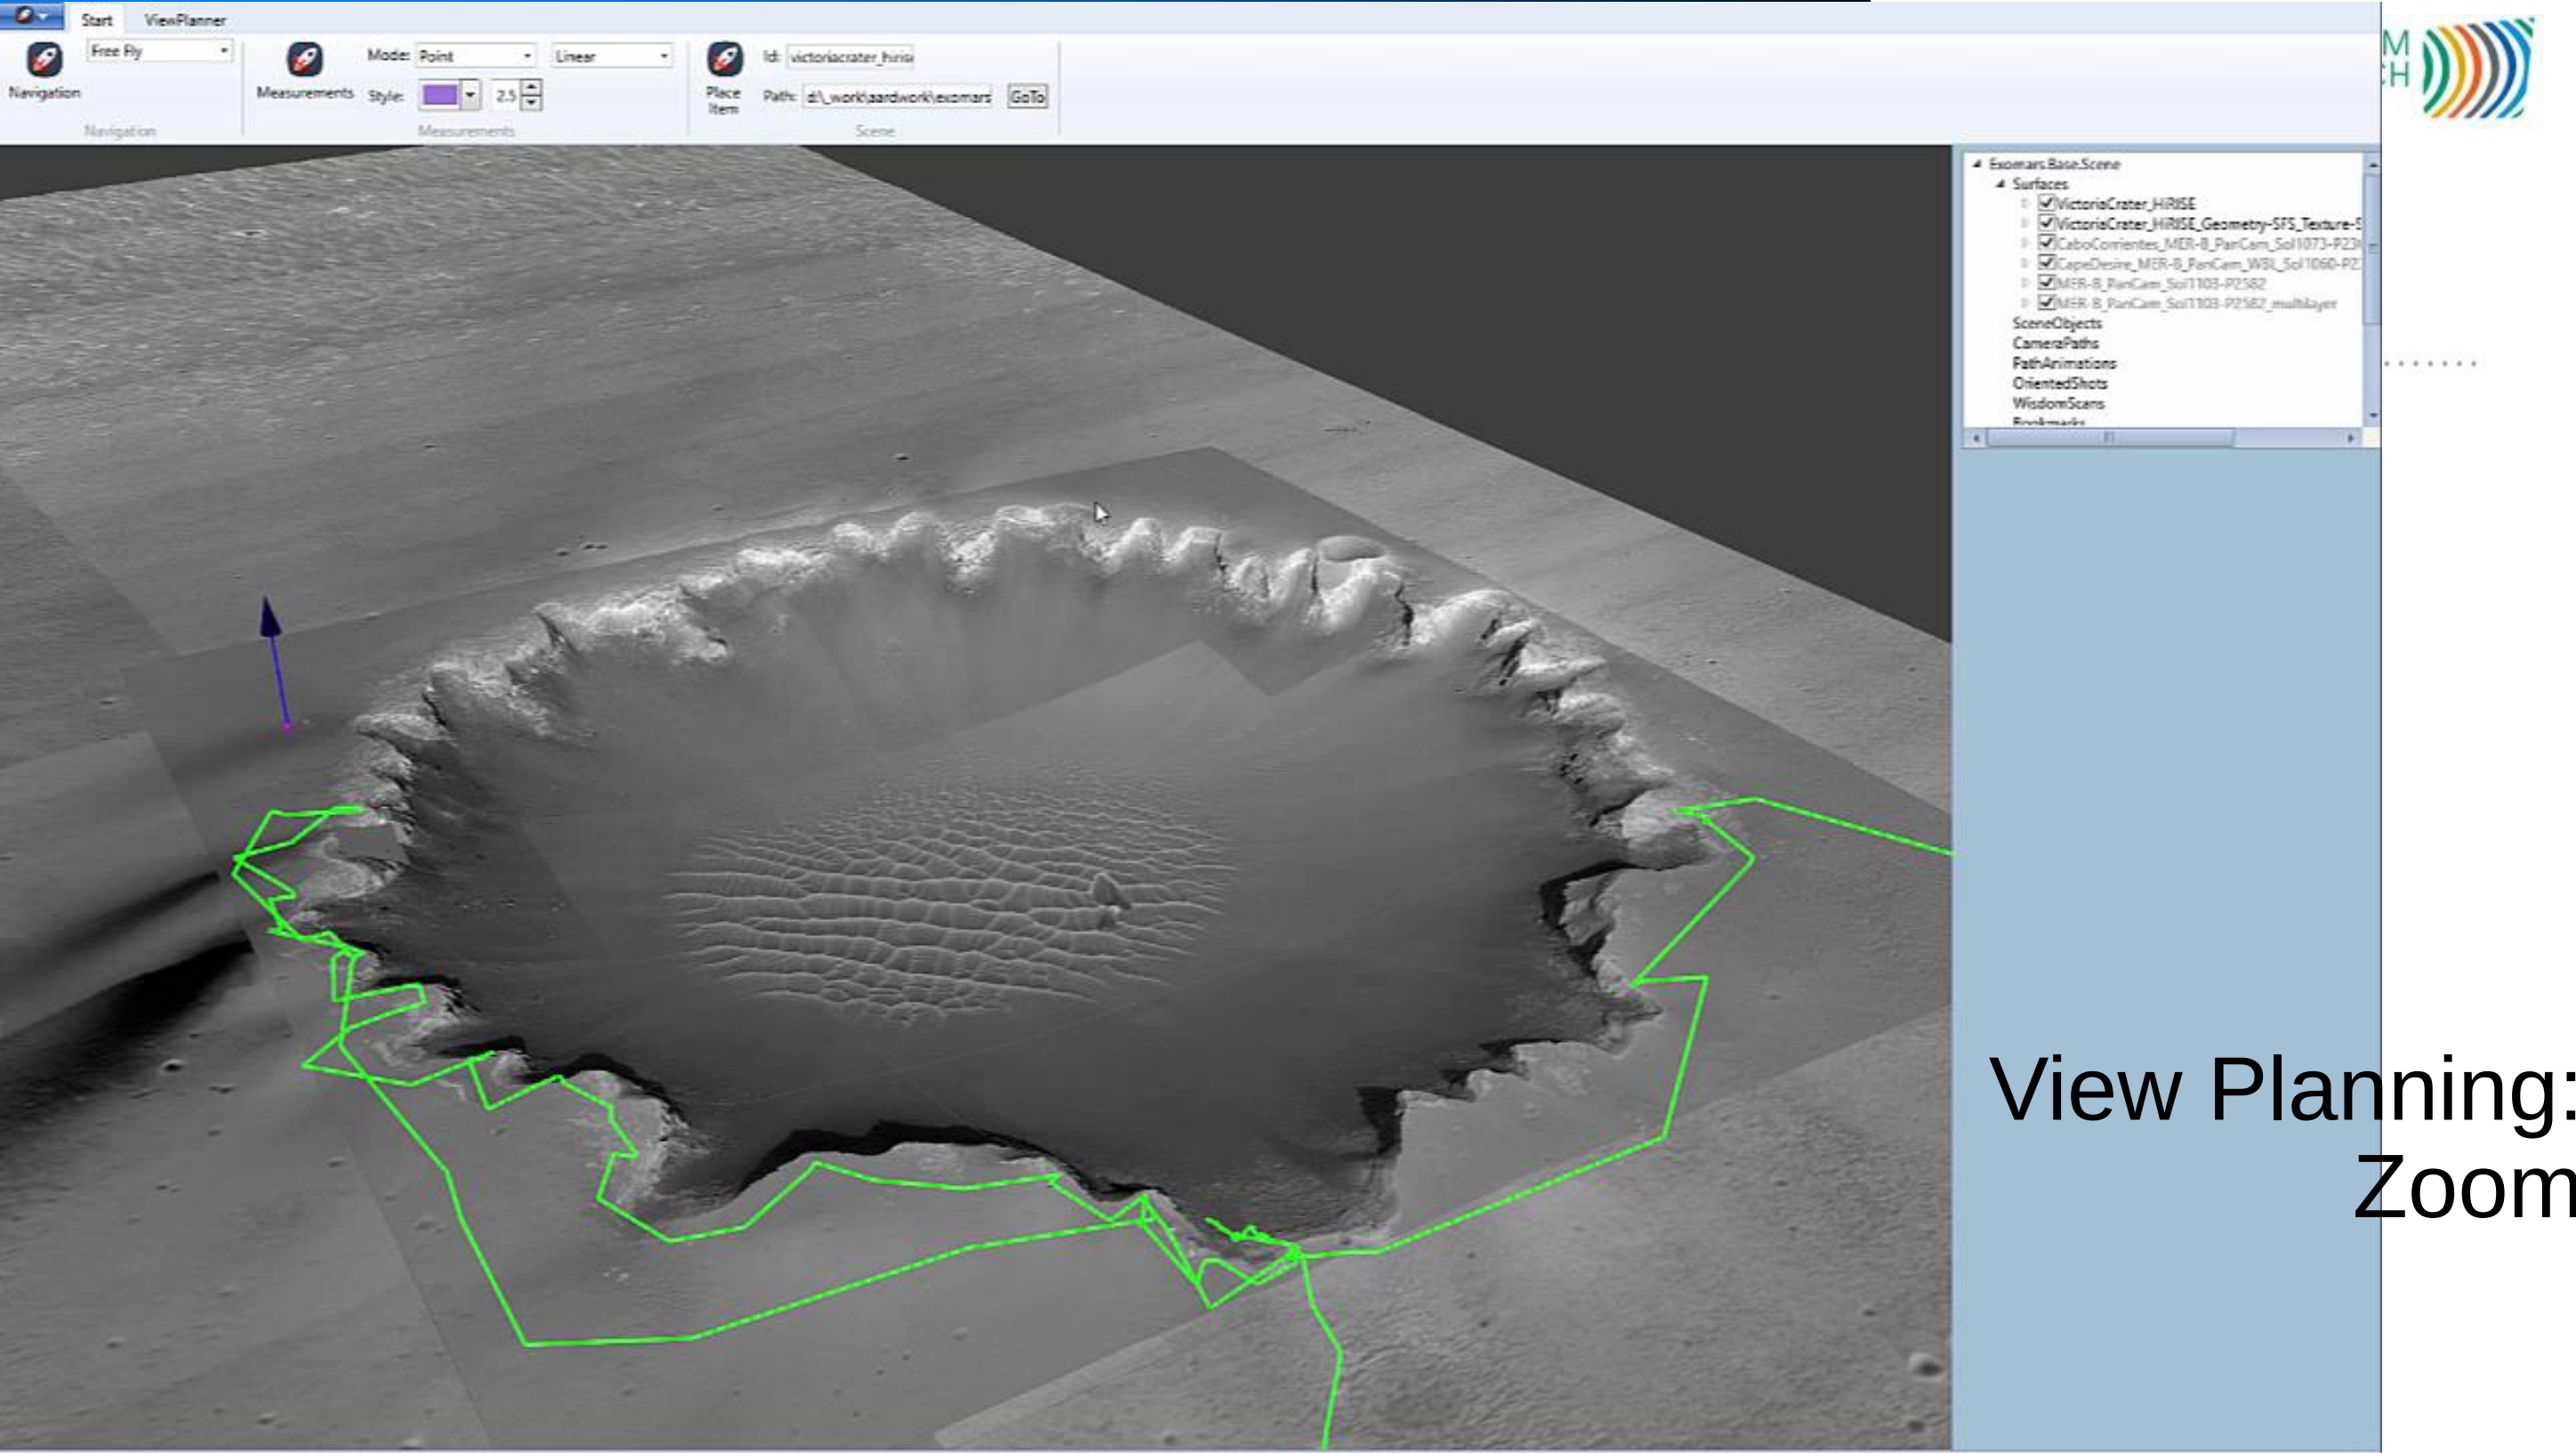

# Global Wide Baseline View Planning & Verification on HiRISE DTM & ORI → Long Range Navigation DTM

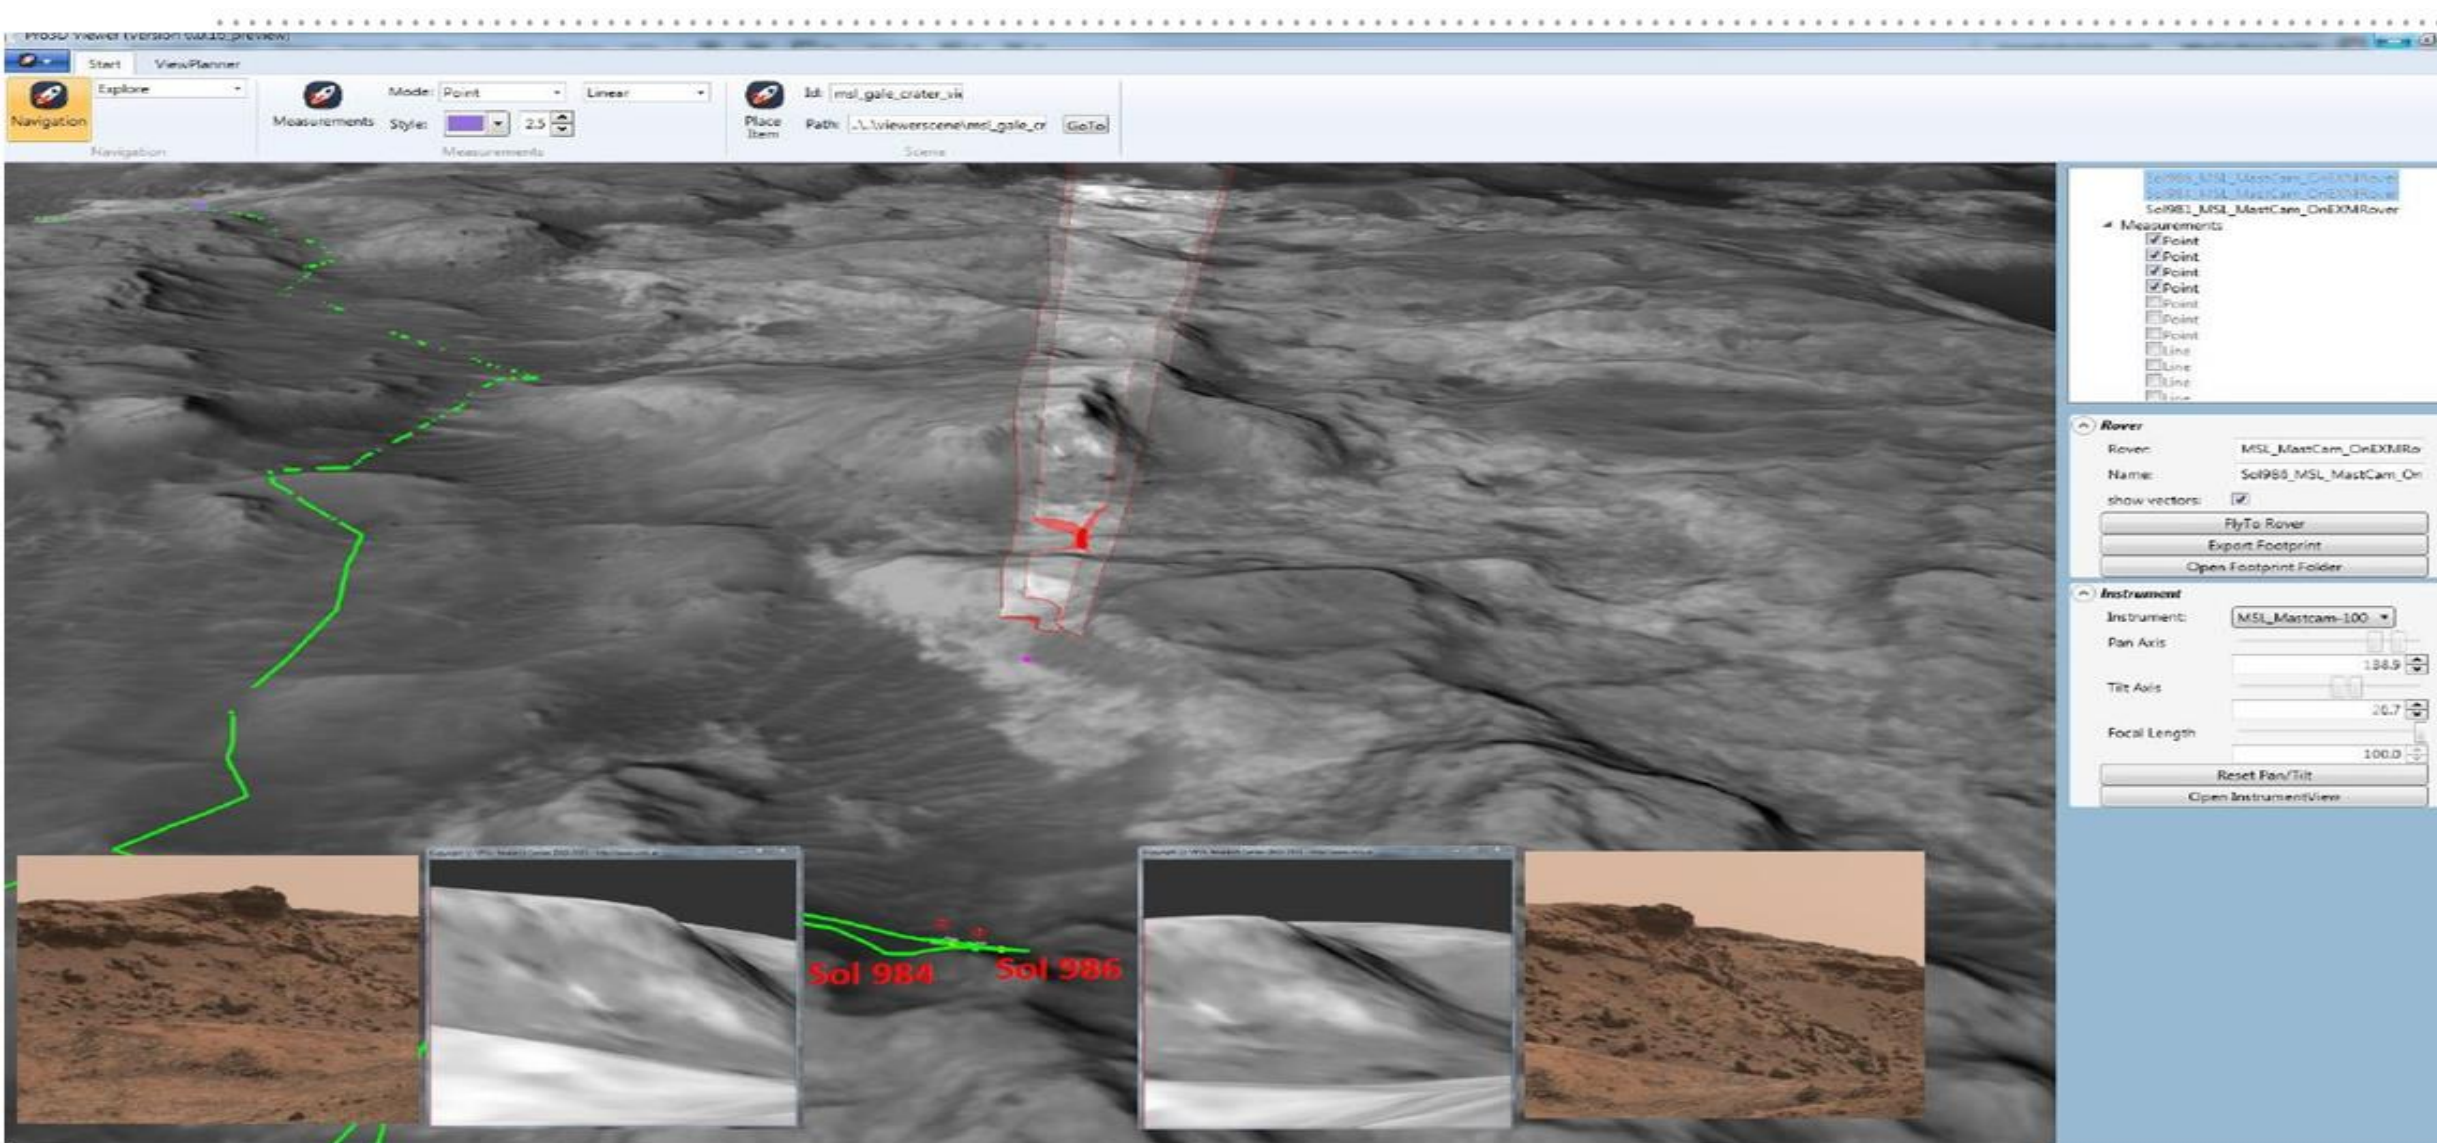

+Plan  
Stereo of  
CLUPI &  
PanCam  
& TSPP



**WBS MSL Mastcam pair Sols 984-986 with 7m baselength (comparing real images and virtual renderings of HiRISE base map from the same position); distance to main portions of the scene about 170m**


# Inspiration / Complement for maintenance & display of observations & Landmarks: NASA/JPL Operations Approach: ASTTRO Tool

17

3D HiRISE &  
Rover 3D  
Augmented  
Database

Geo-  
Located  
Images  
&  
Target  
Location  
Displayed

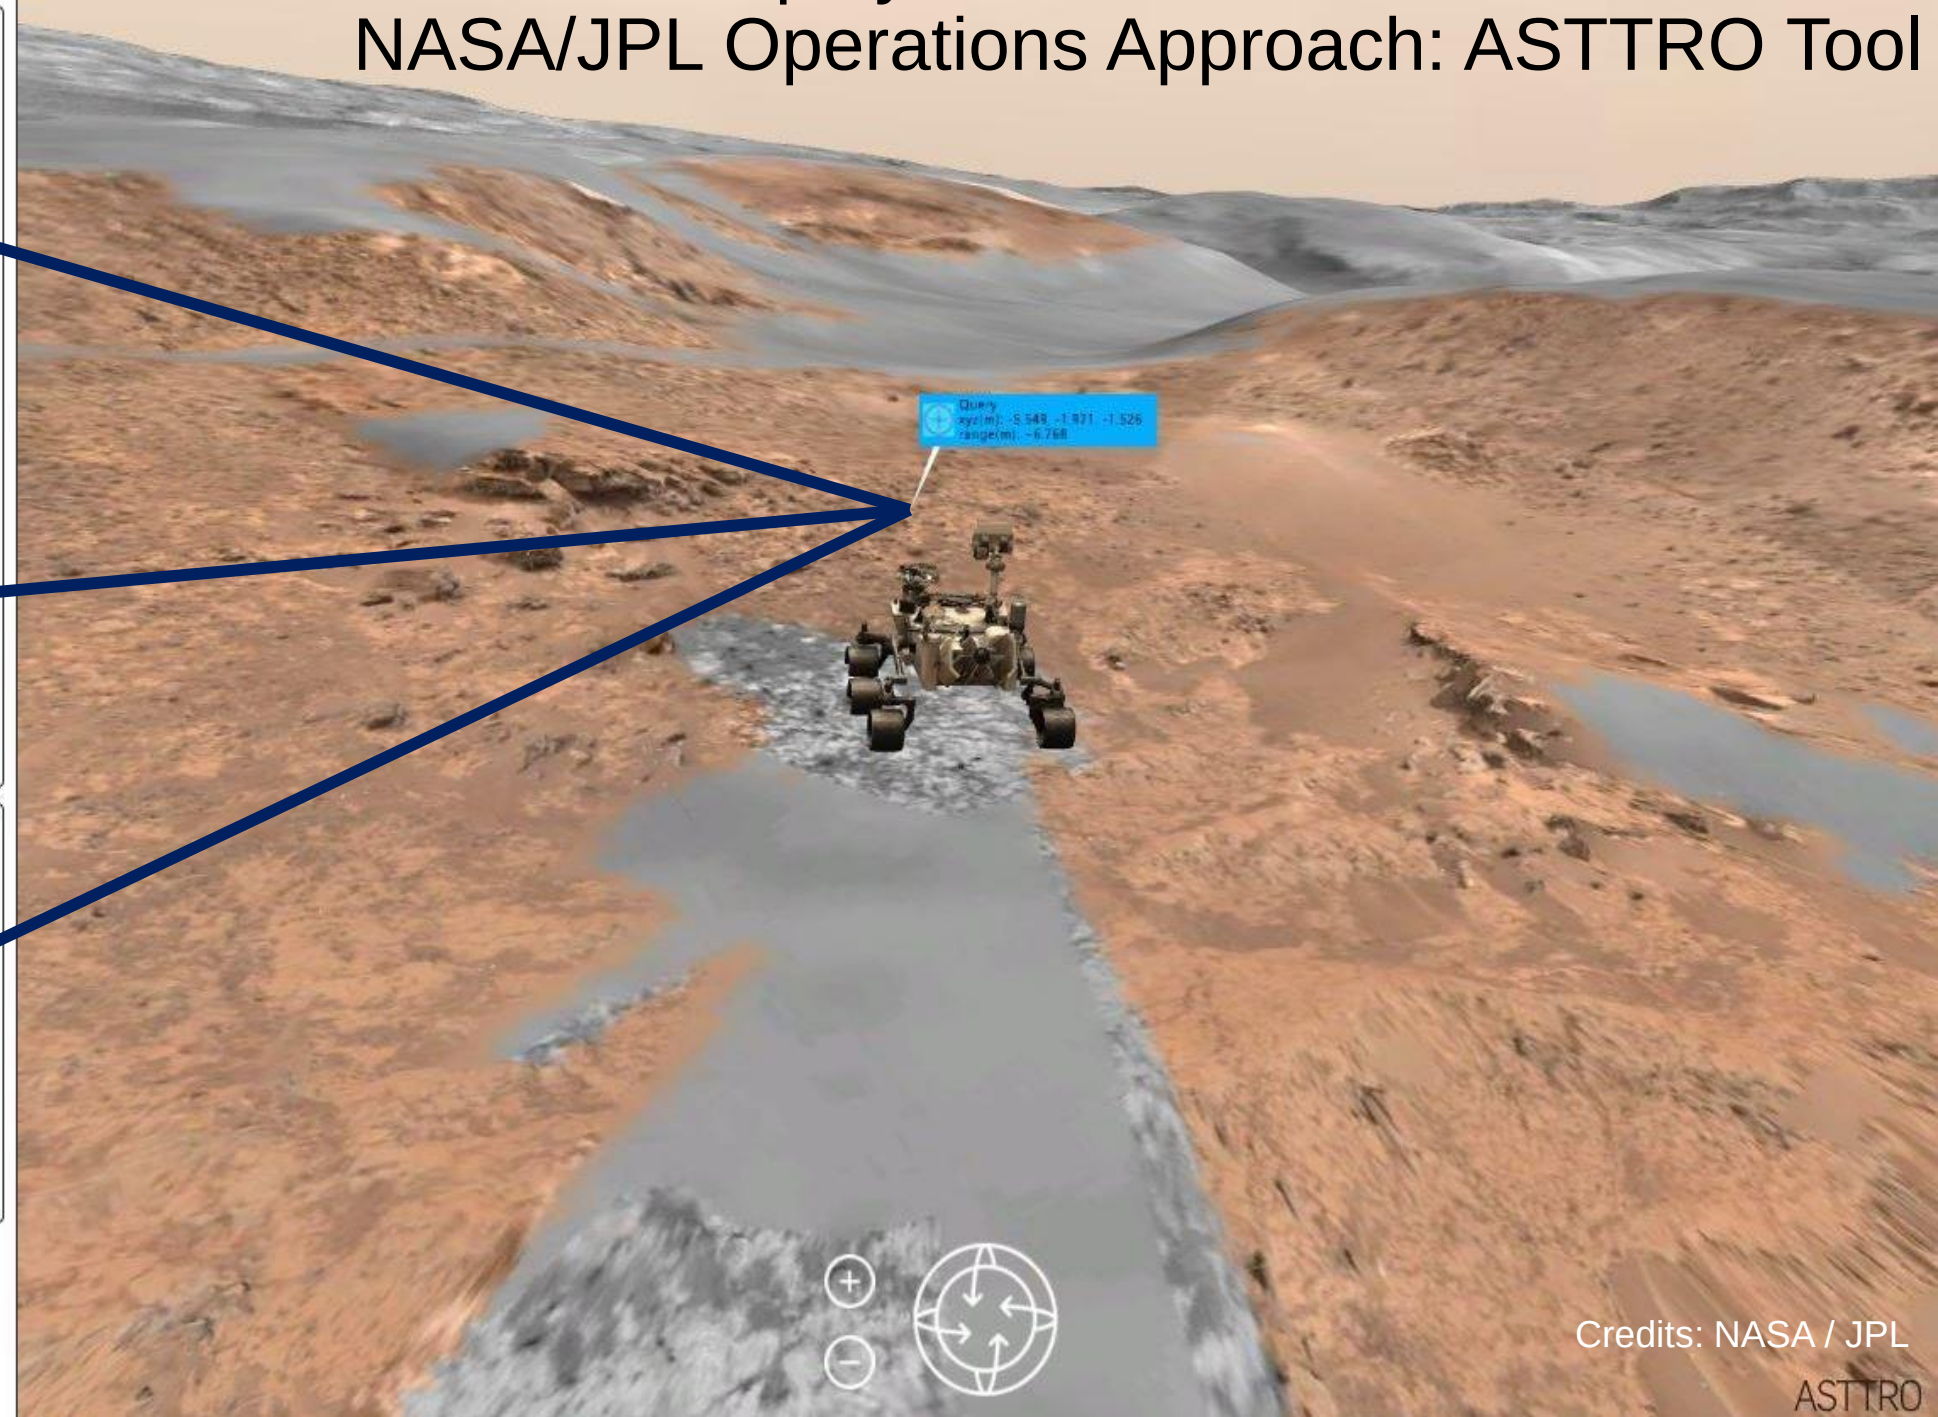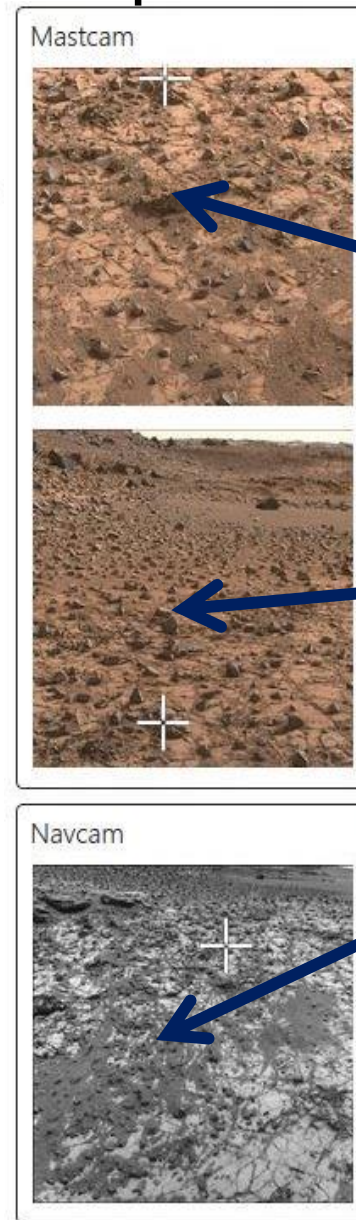

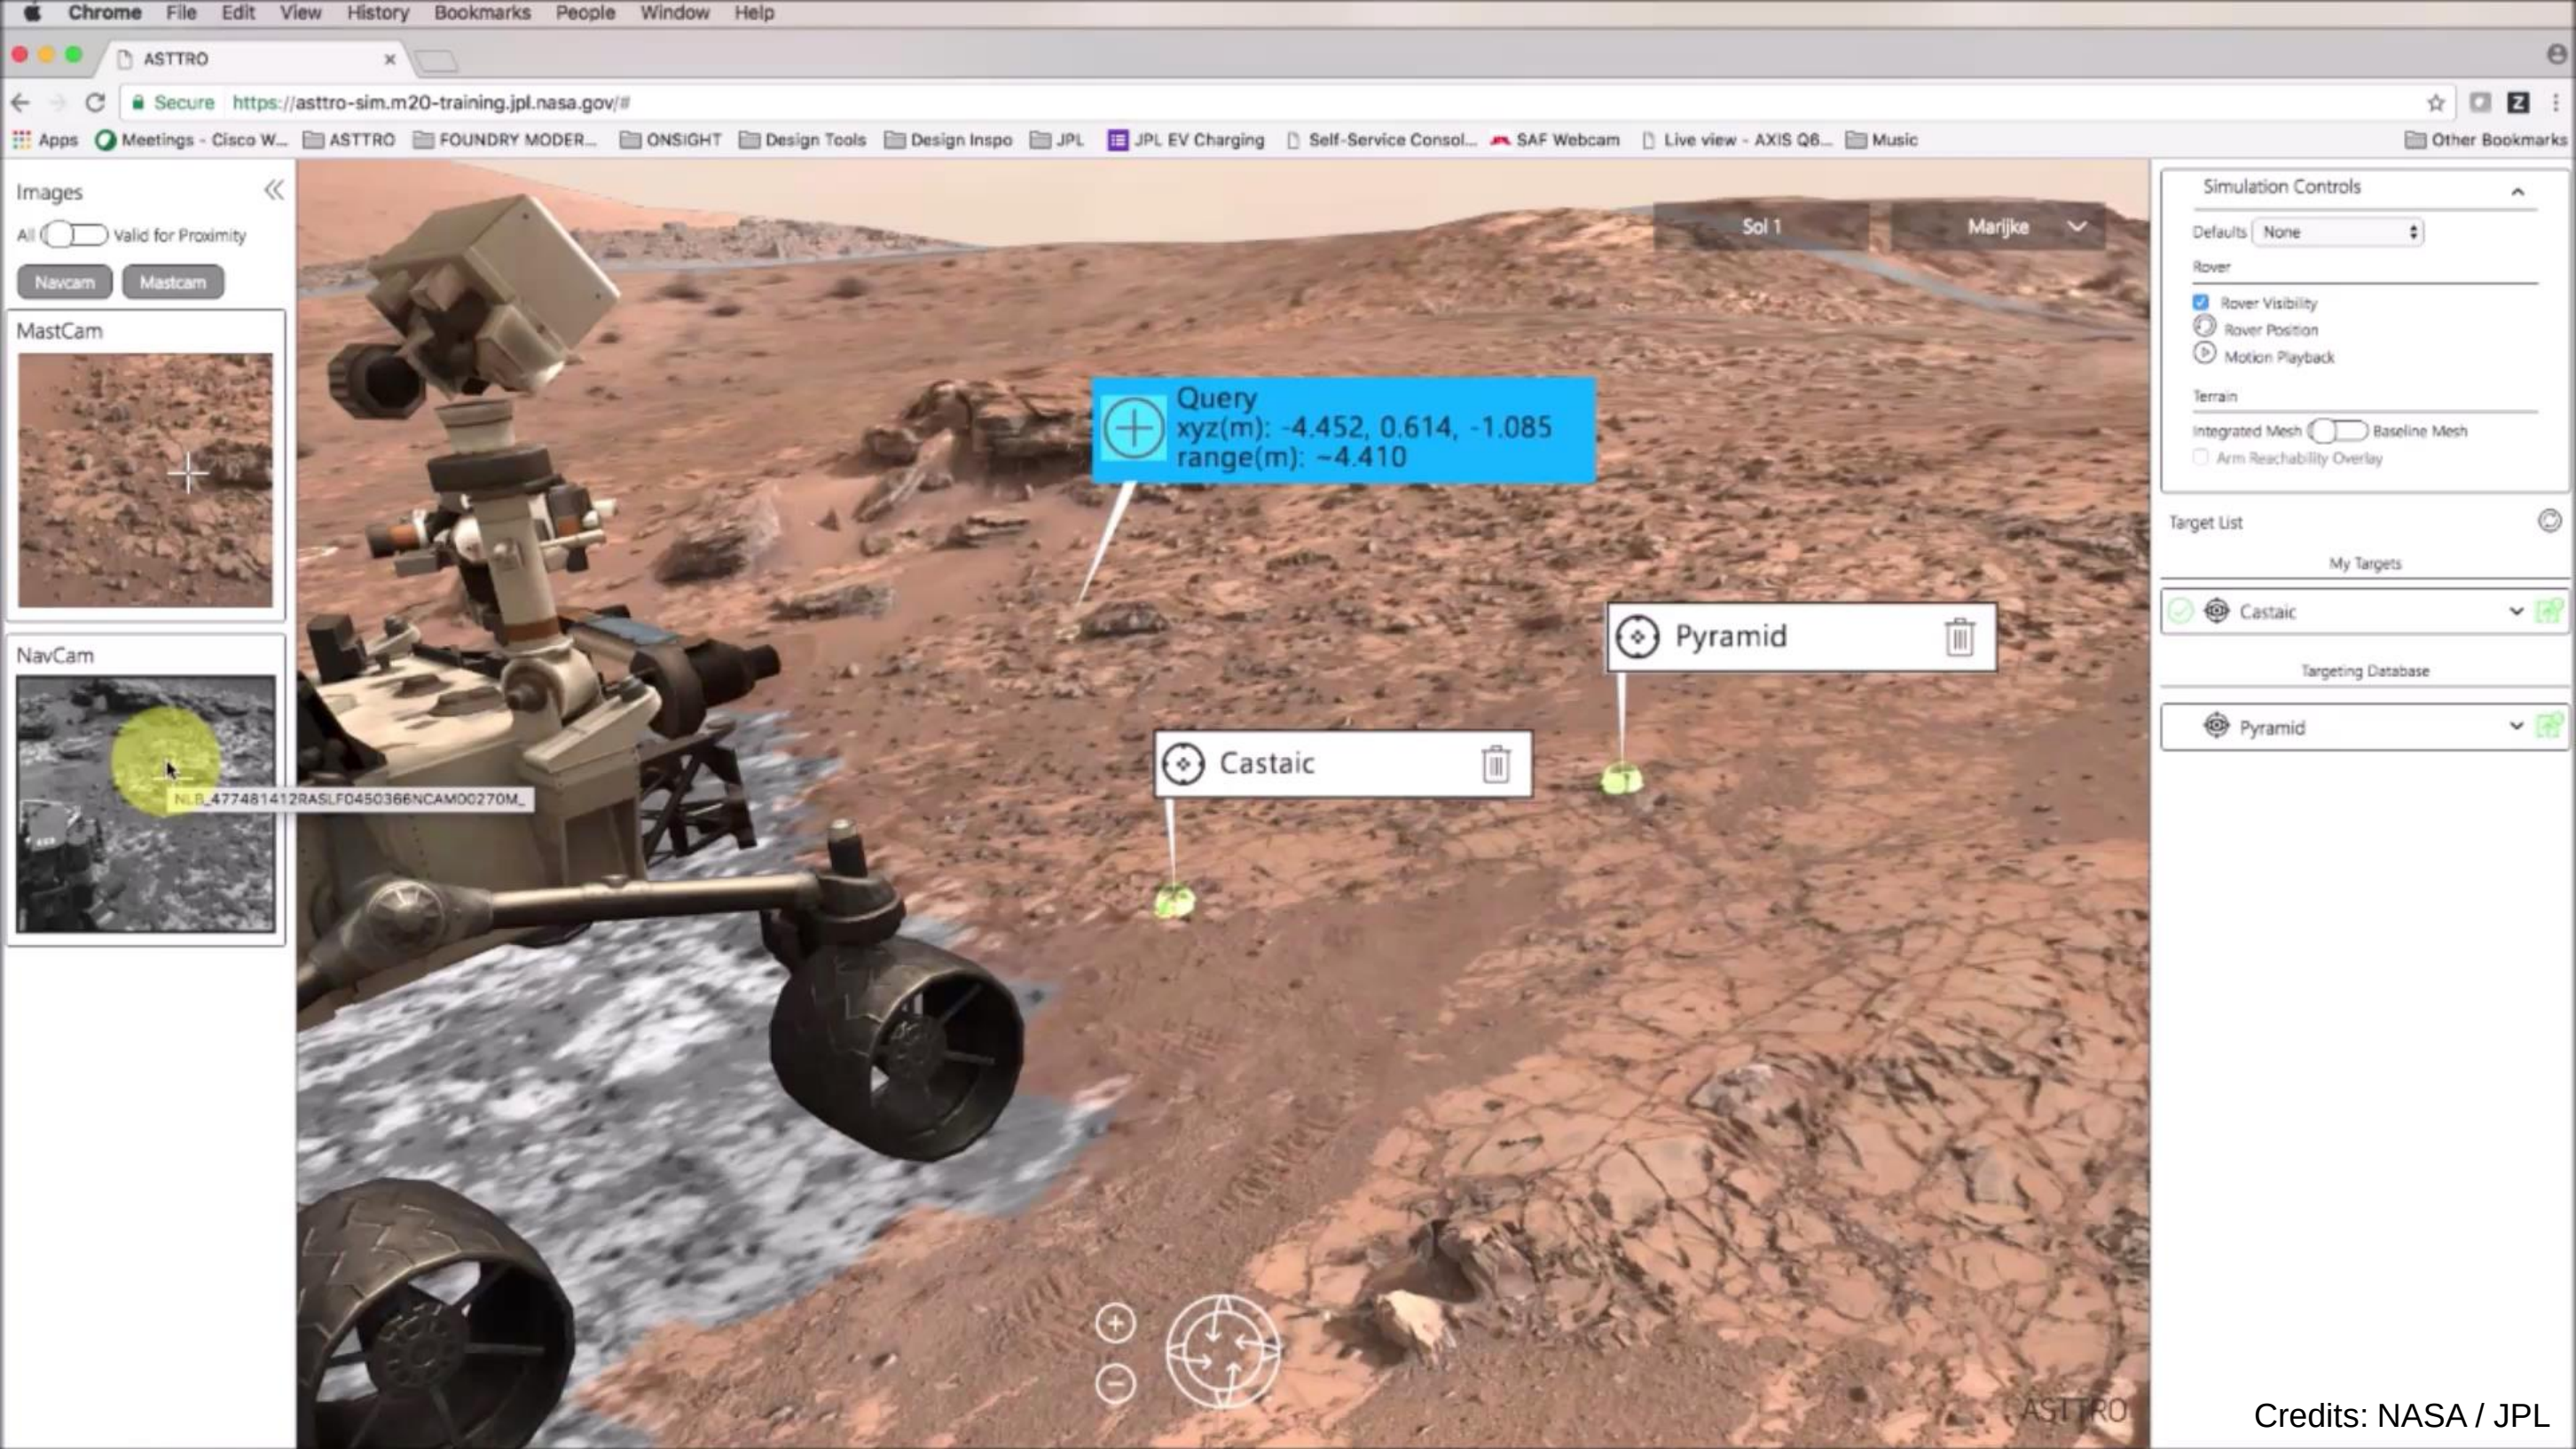

### Images

All ☐ Valid for Proximity

Navcam Mastcam

### MastCam



### NavCam



Sol 1

Marijke

Query  
xyz(m): -4.452, 0.614, -1.085  
range(m): -4.410

Pyramid

Castaic

### Simulation Controls

Defaults None

#### Rover

- ☒ Rover Visibility
- ☐ Rover Position
- ☐ Motion Playback

#### Terrain

Integrated Mesh ☐ Baseline Mesh ☐  
☐ Arm Reachability Overlay

### Target List

My Targets


Castaic

Targeting Database

Pyramid

ASTTRO


Credits: NASA / JPL

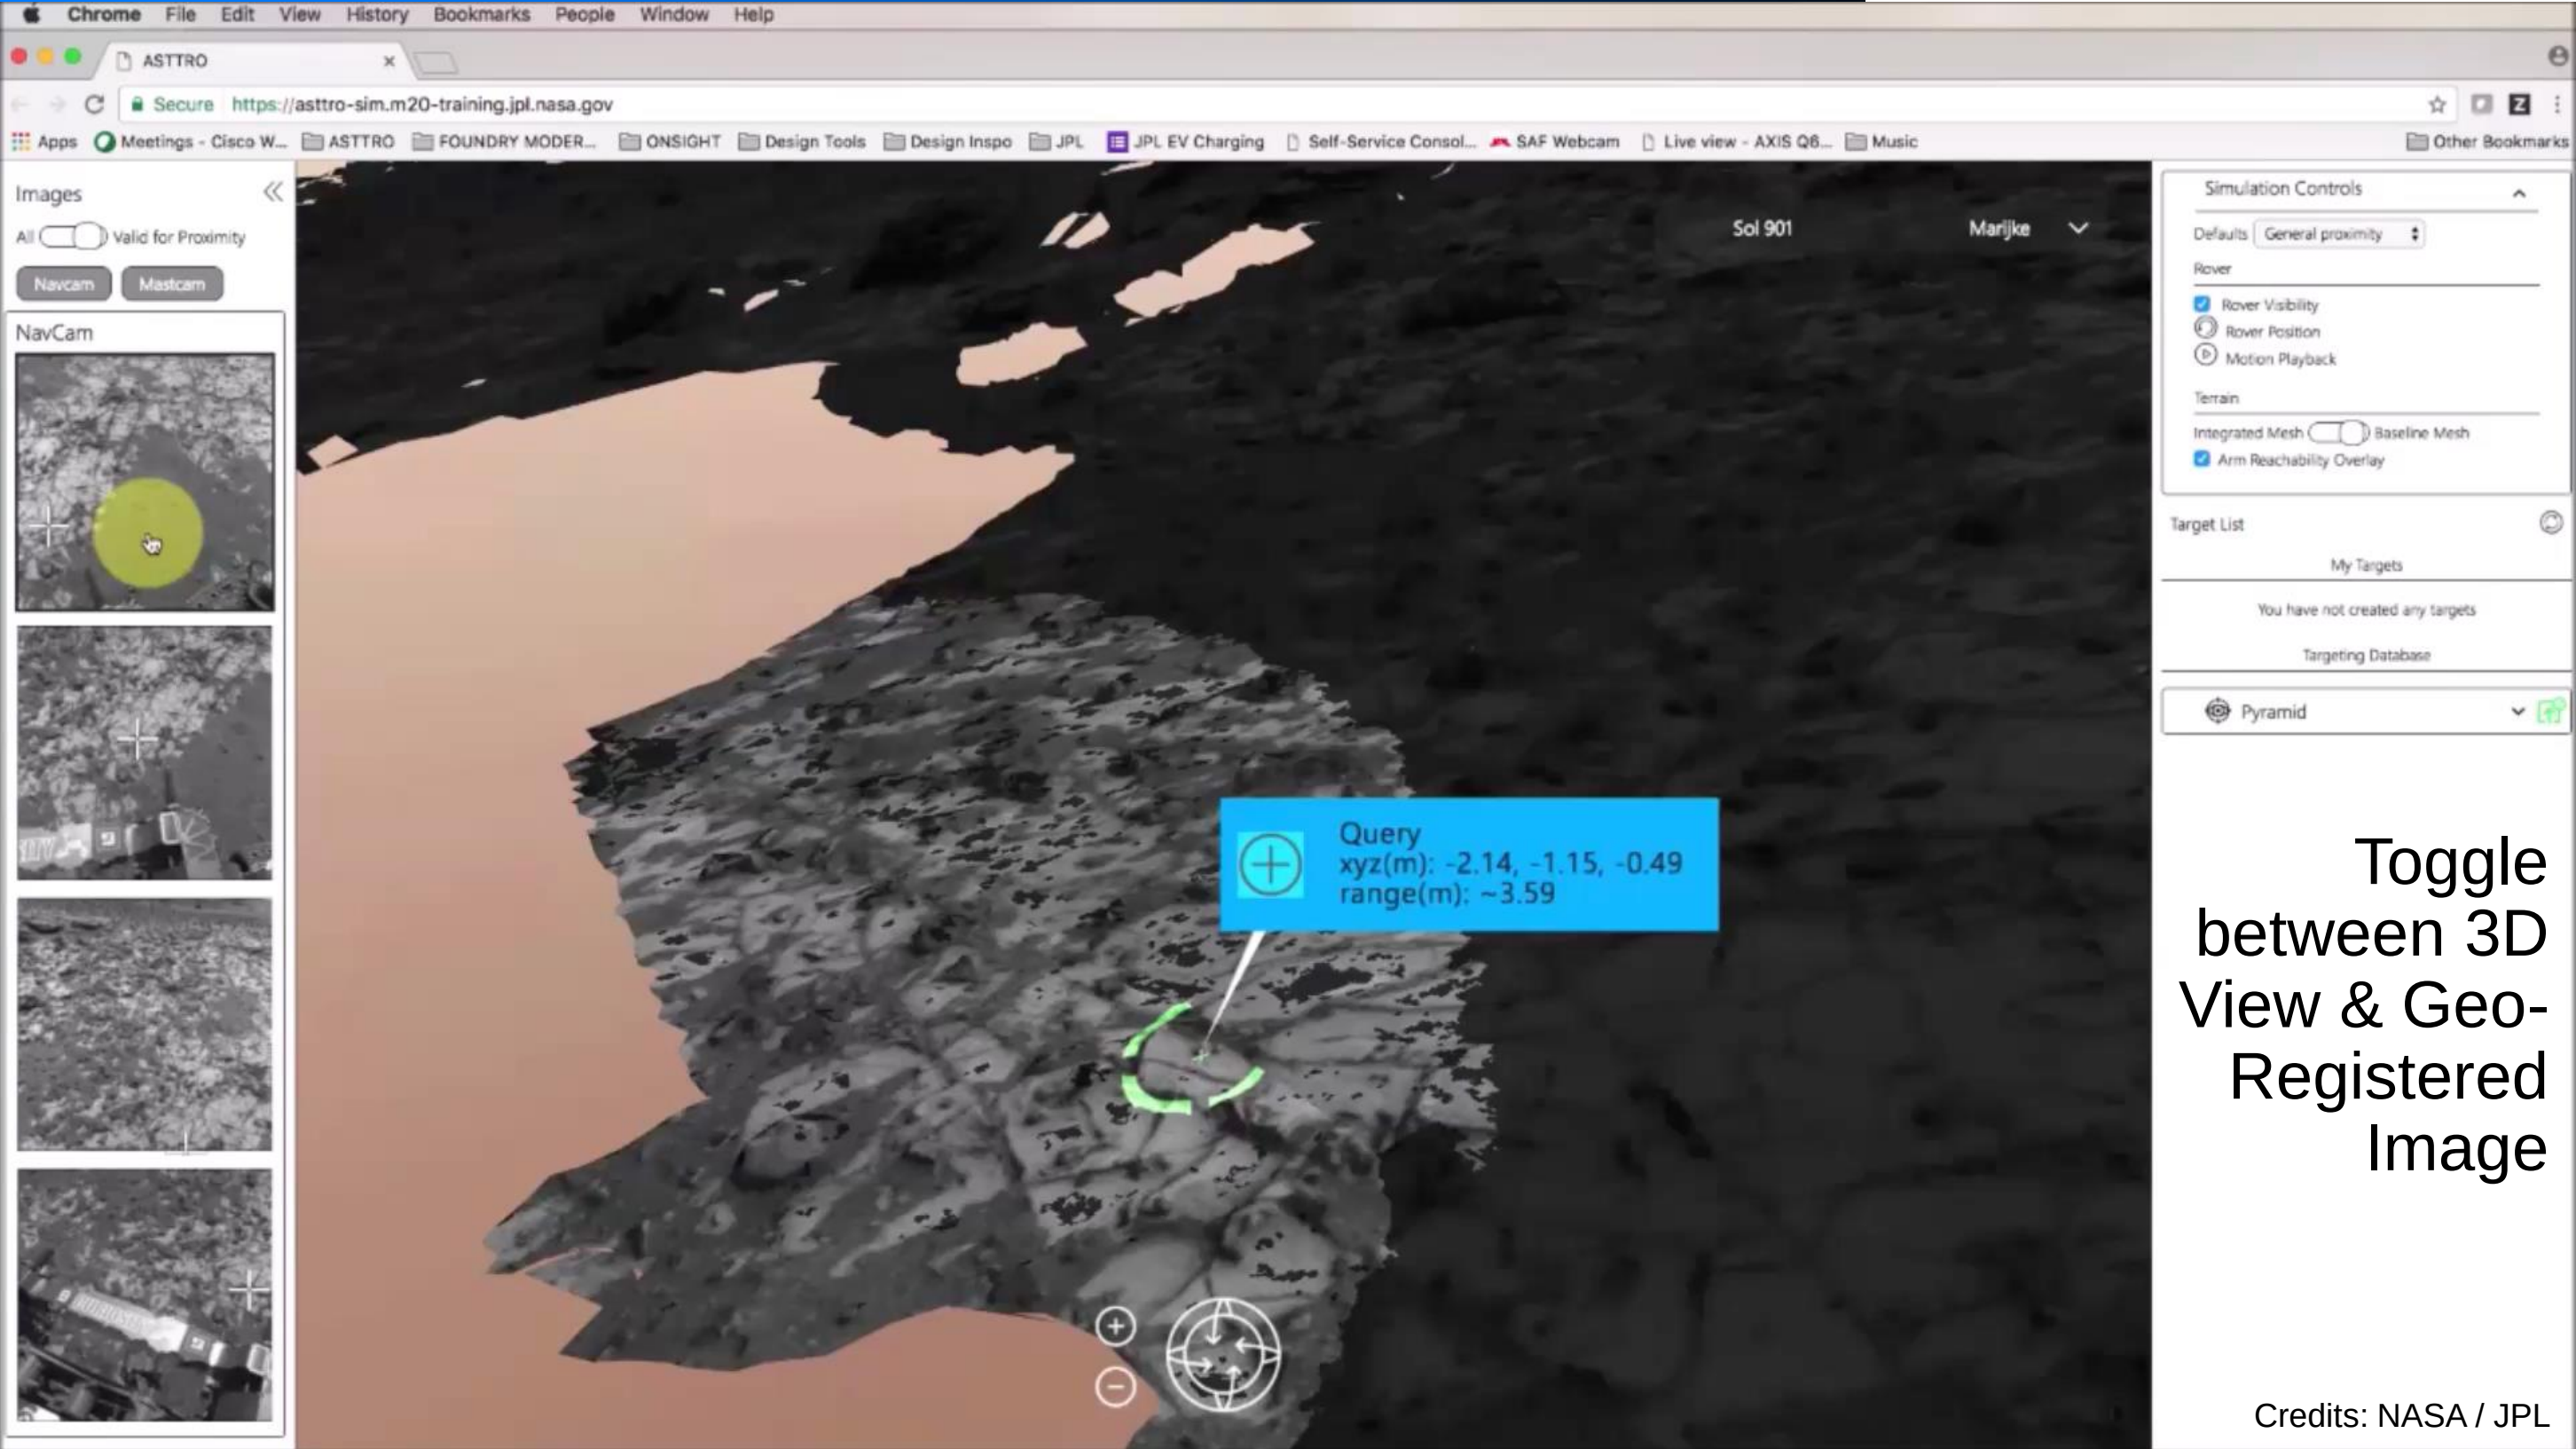


Toggle  
between 3D  
View & Geo-  
Registered  
Image

# Instrument data presentation within PRo3D: Initial simplistic view

20

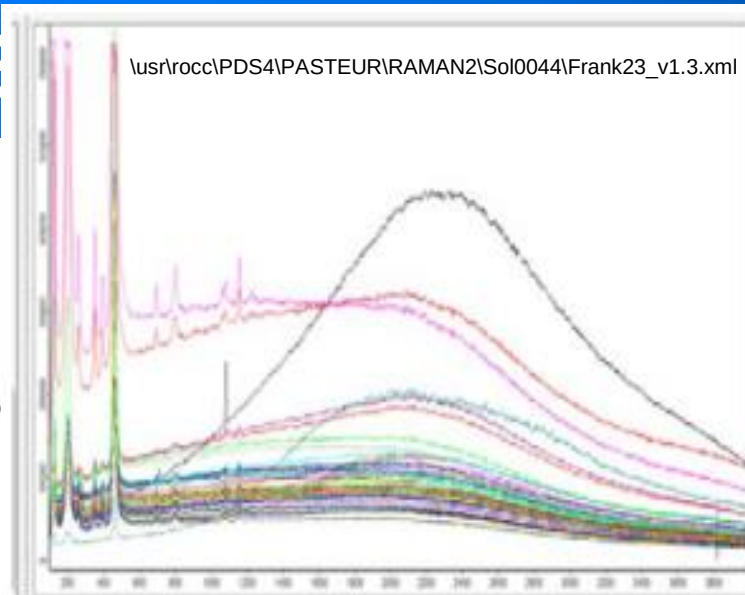


- Measurements are data blobs in 3D overview
- Clicking therein results in
  - launch of custom presentation HMI
  - Read-out & Display of Generic Instruments Data

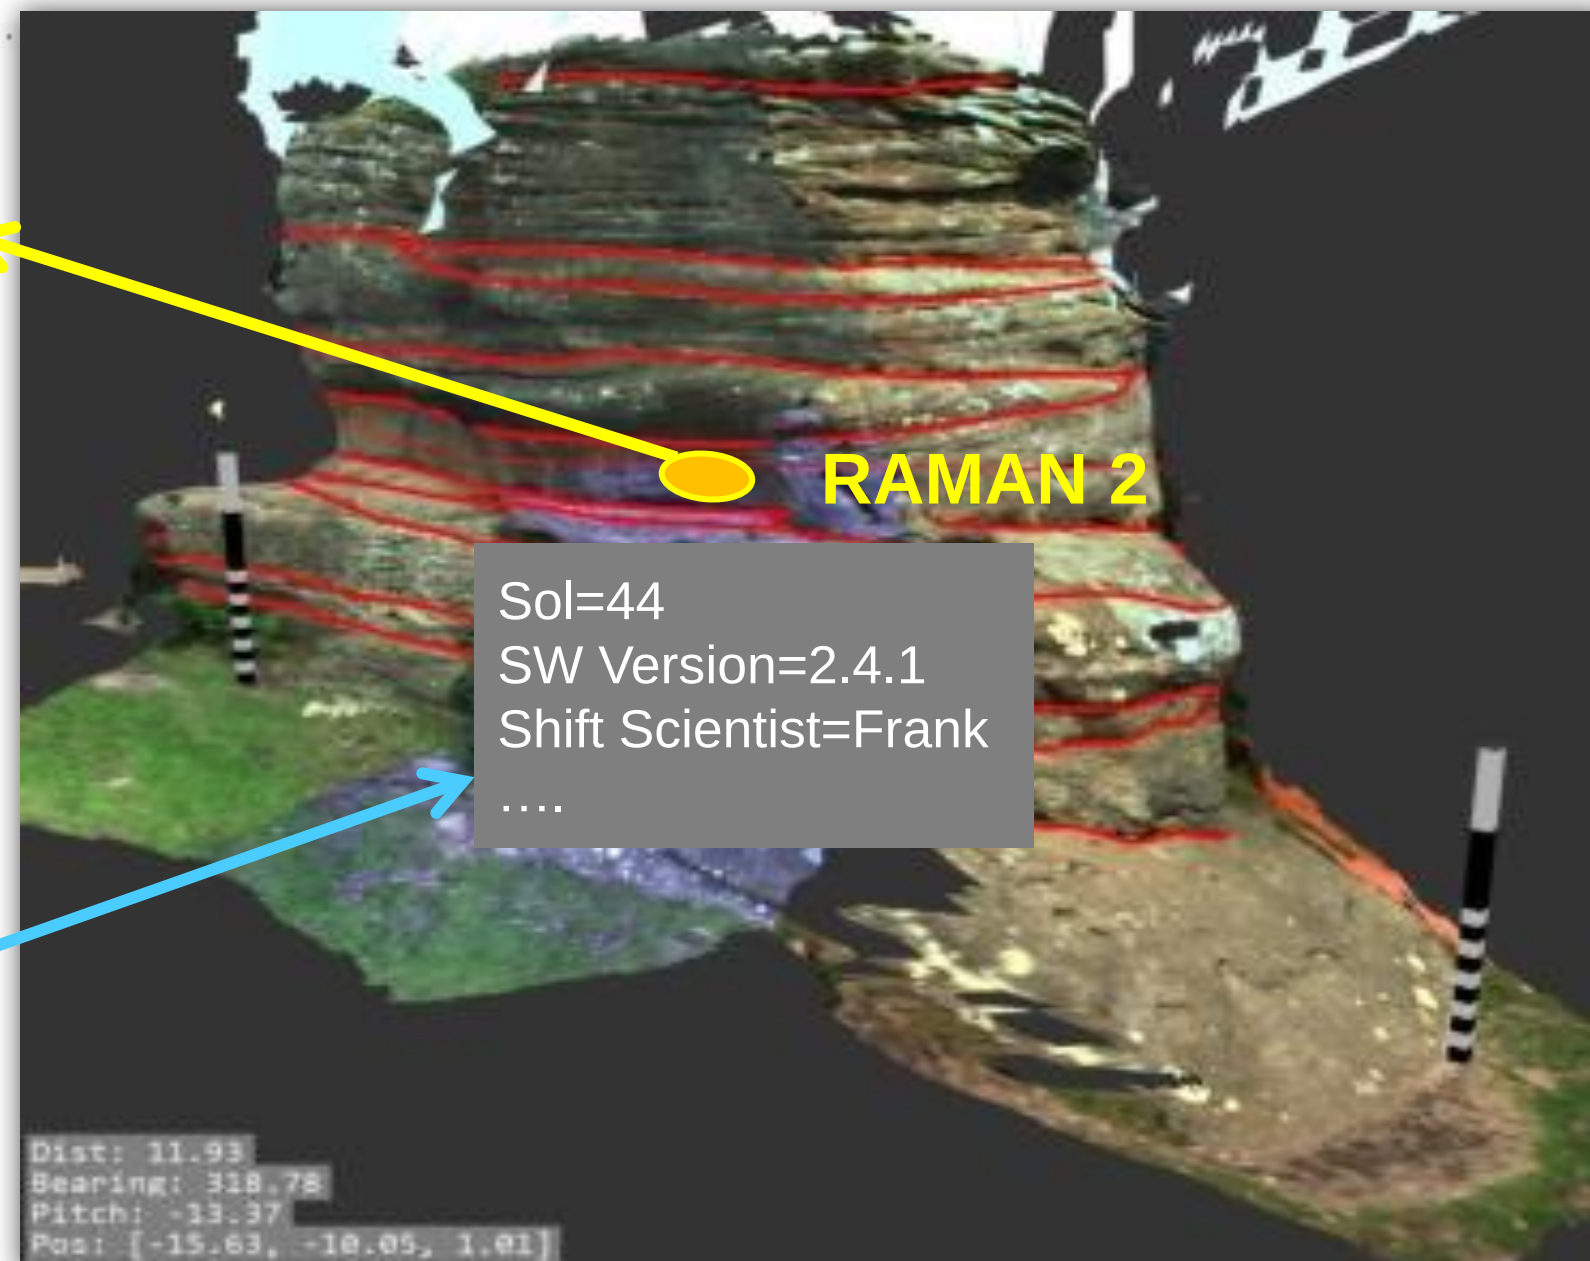

# MINERVA Scheme


ExoMars Instruments' data:

- Footprints
  - Frustrum
  - GUID / PDS Link
  - Relevant resources
    - Images
    - Spectra (ISEM, [Ma\_MISS], ..)
    - H<sub>2</sub>O% (ADRON)
    - vtk file (WISDOM)
    - Statistics
    - Specific Instruments' analysis
- SW Launching

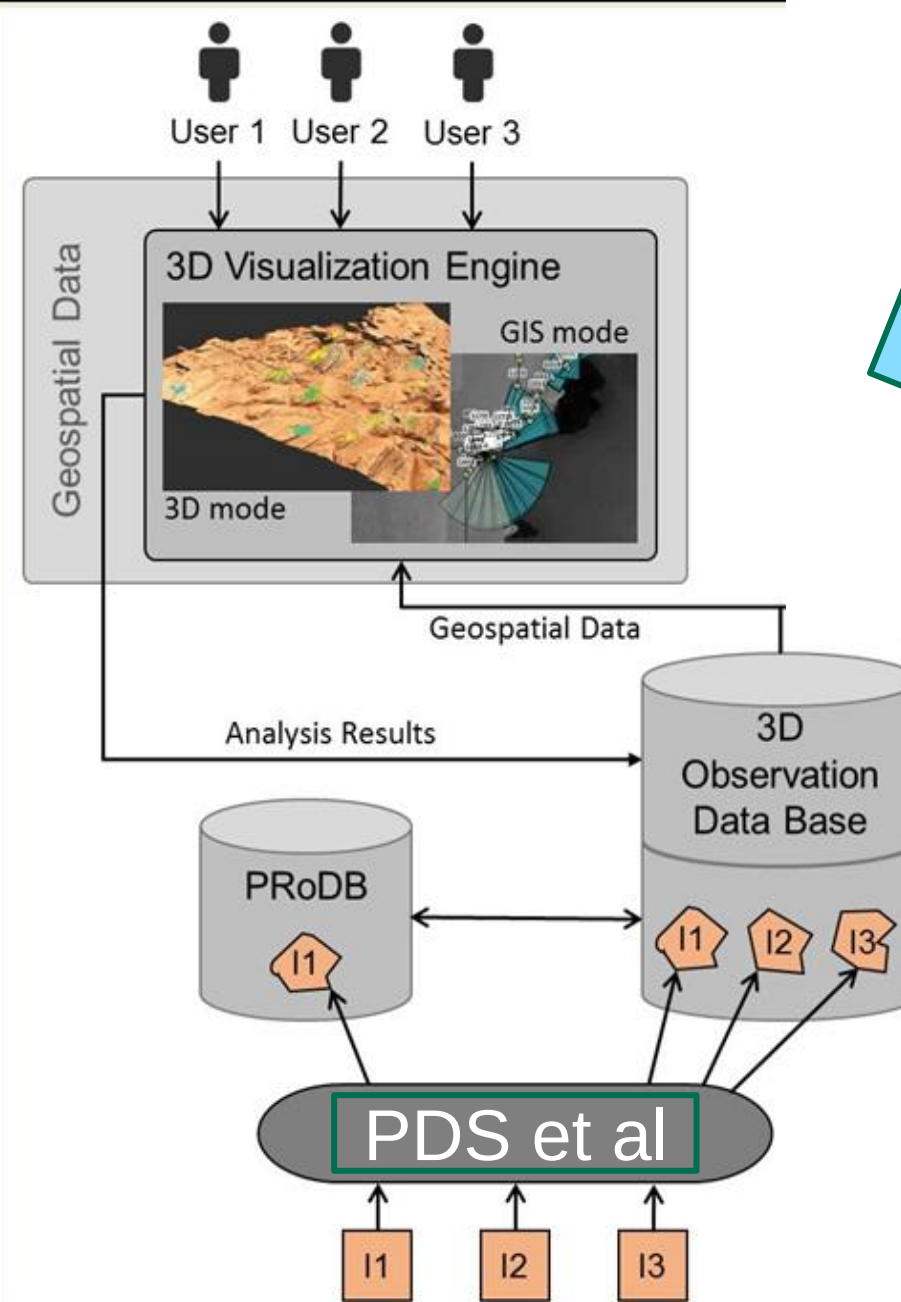



Requires PDS4 spatial cues from each Instrument!

Figure 6: MINERVA concept. The Instrument Teams (I1...I3) use the generic importer tools (or – in the case of vision – the existing vision processing results as available to JR) to ingest mission data into the 3D Observation Data Base. From there it is available to the 3D Visualization Engine with integrated GIS functionality, and the Non-spatial Data Analysis Platform. Different users can share the same locations, observations, and launch visual analysis of different instruments at a time.

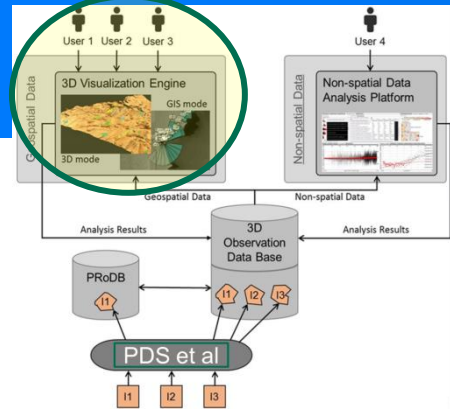


# PPro3D: Exploit object representation assets to represent Instruments' Observations' footprints

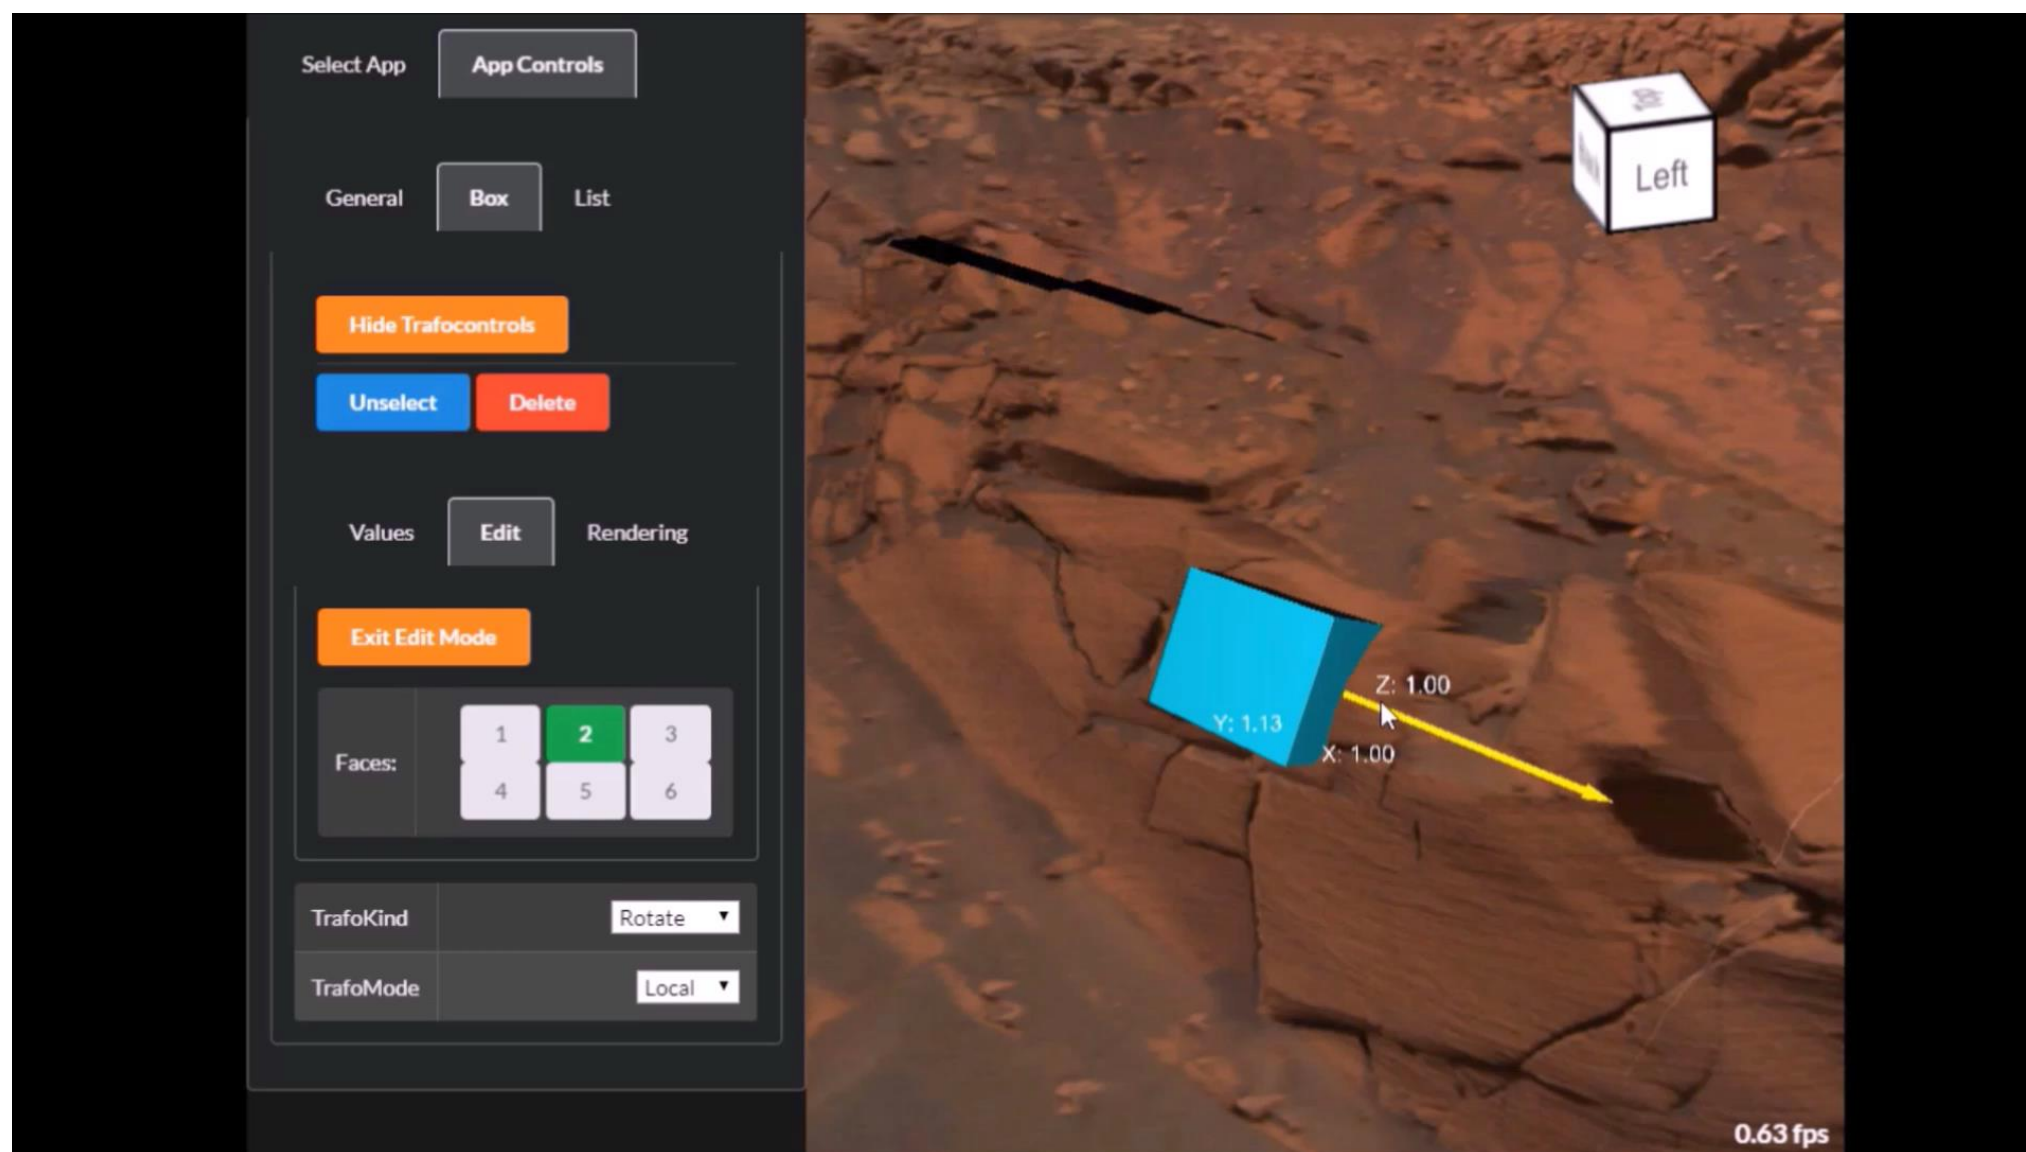


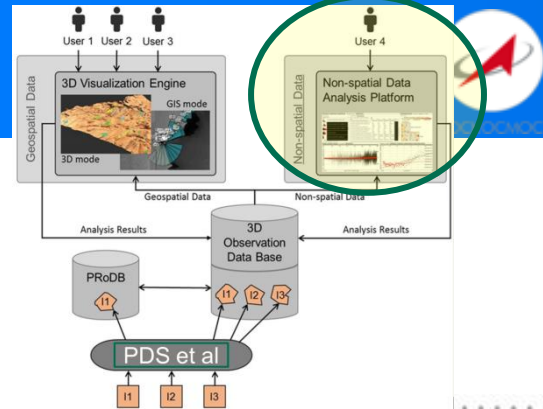


# Visual Analytics: The Visplora Component

- Translating search patterns into DBMS I/F
- Direct use of meta & instrument data
- Cross references between data, meta data of different instruments
- Spatial & temporal relationship
- Finding new patterns in data
- ....Users will find out

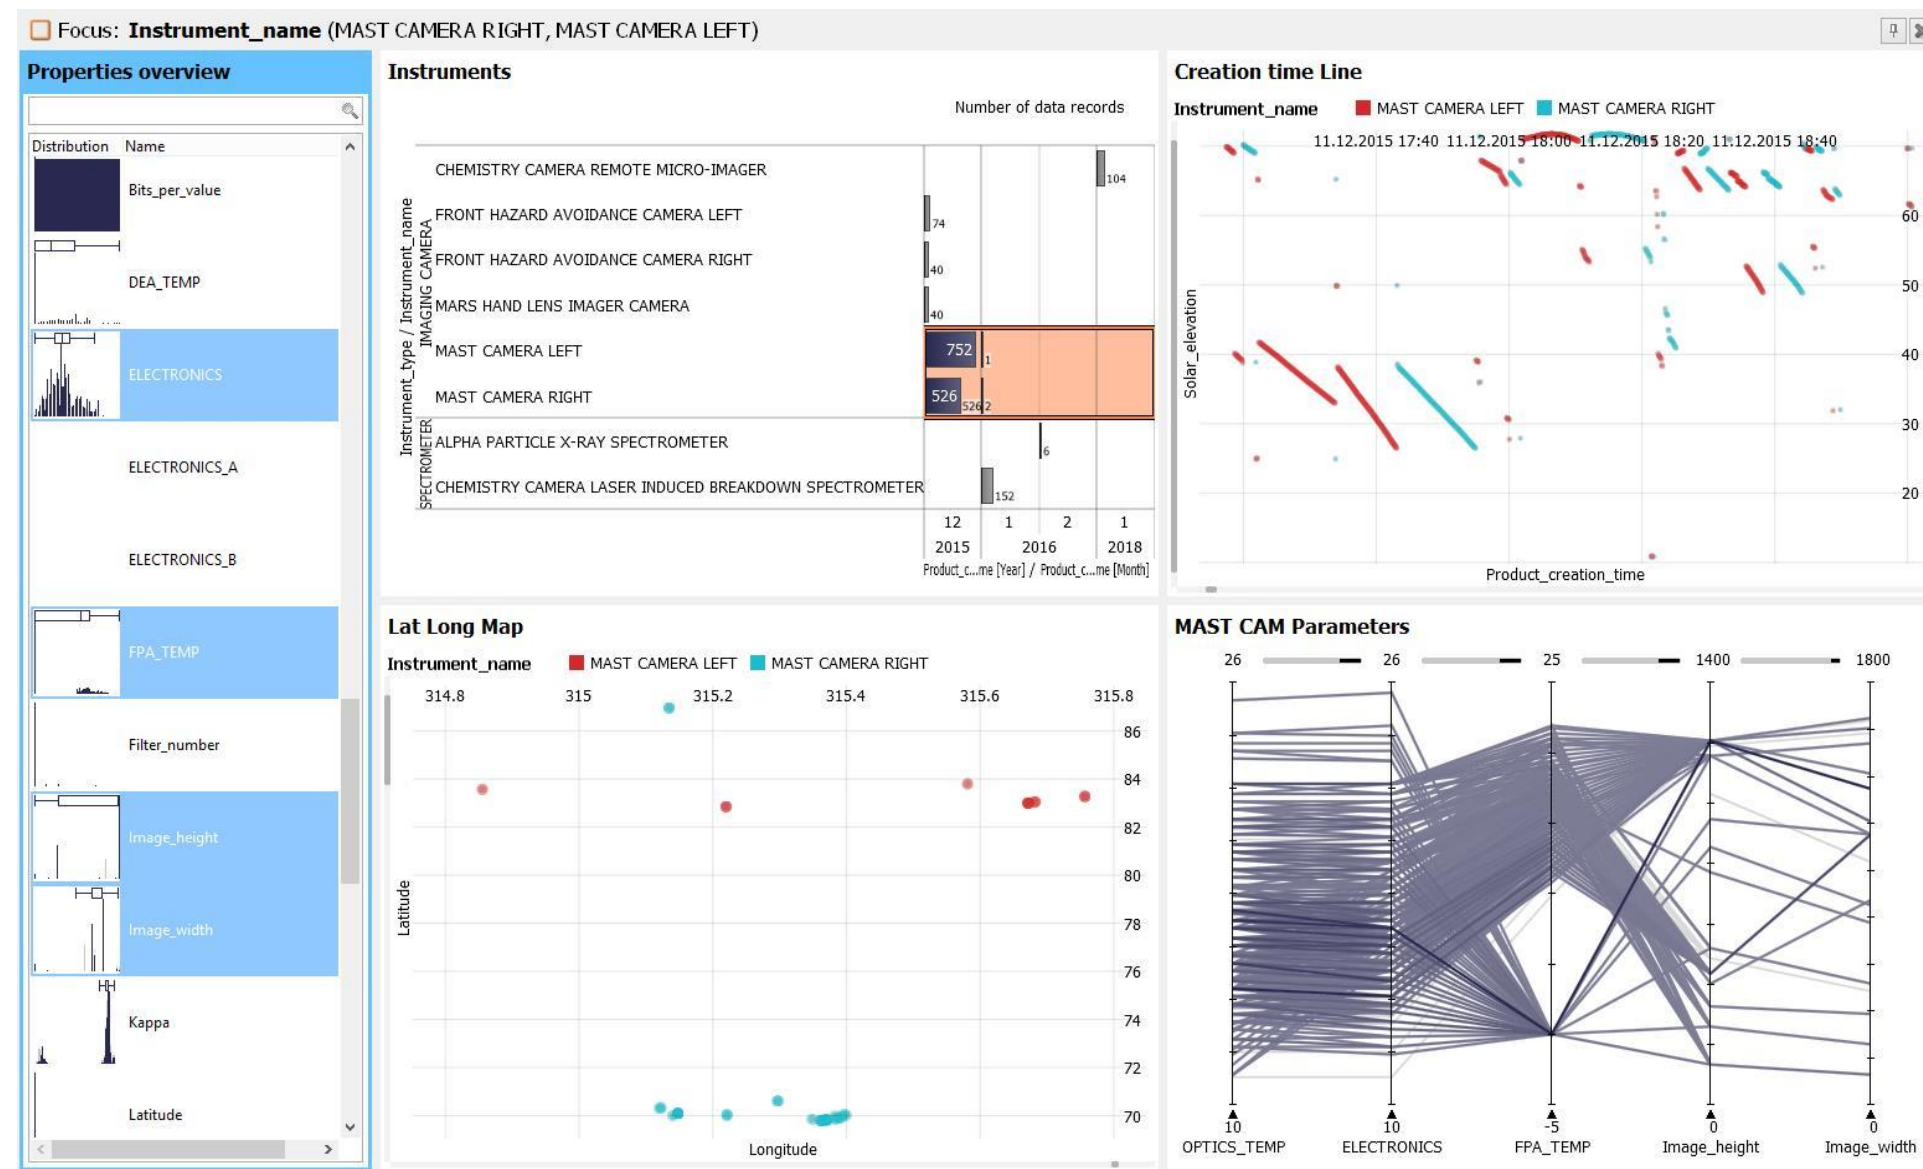

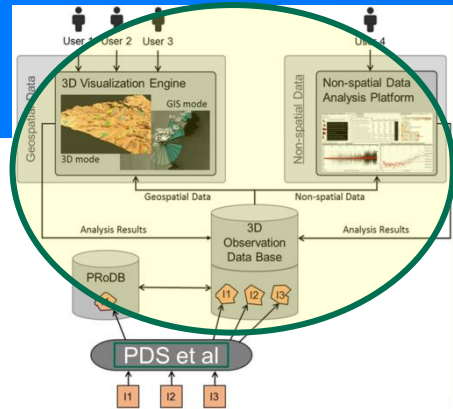


MINERVA  
in  
Operation



PRo3D - Stimson Site  
part of MSL data ingest


See <https://www.youtube.com/watch?v=NTIS9OrImTk>

# WISDOM Ground Penetrating Radar Fusion

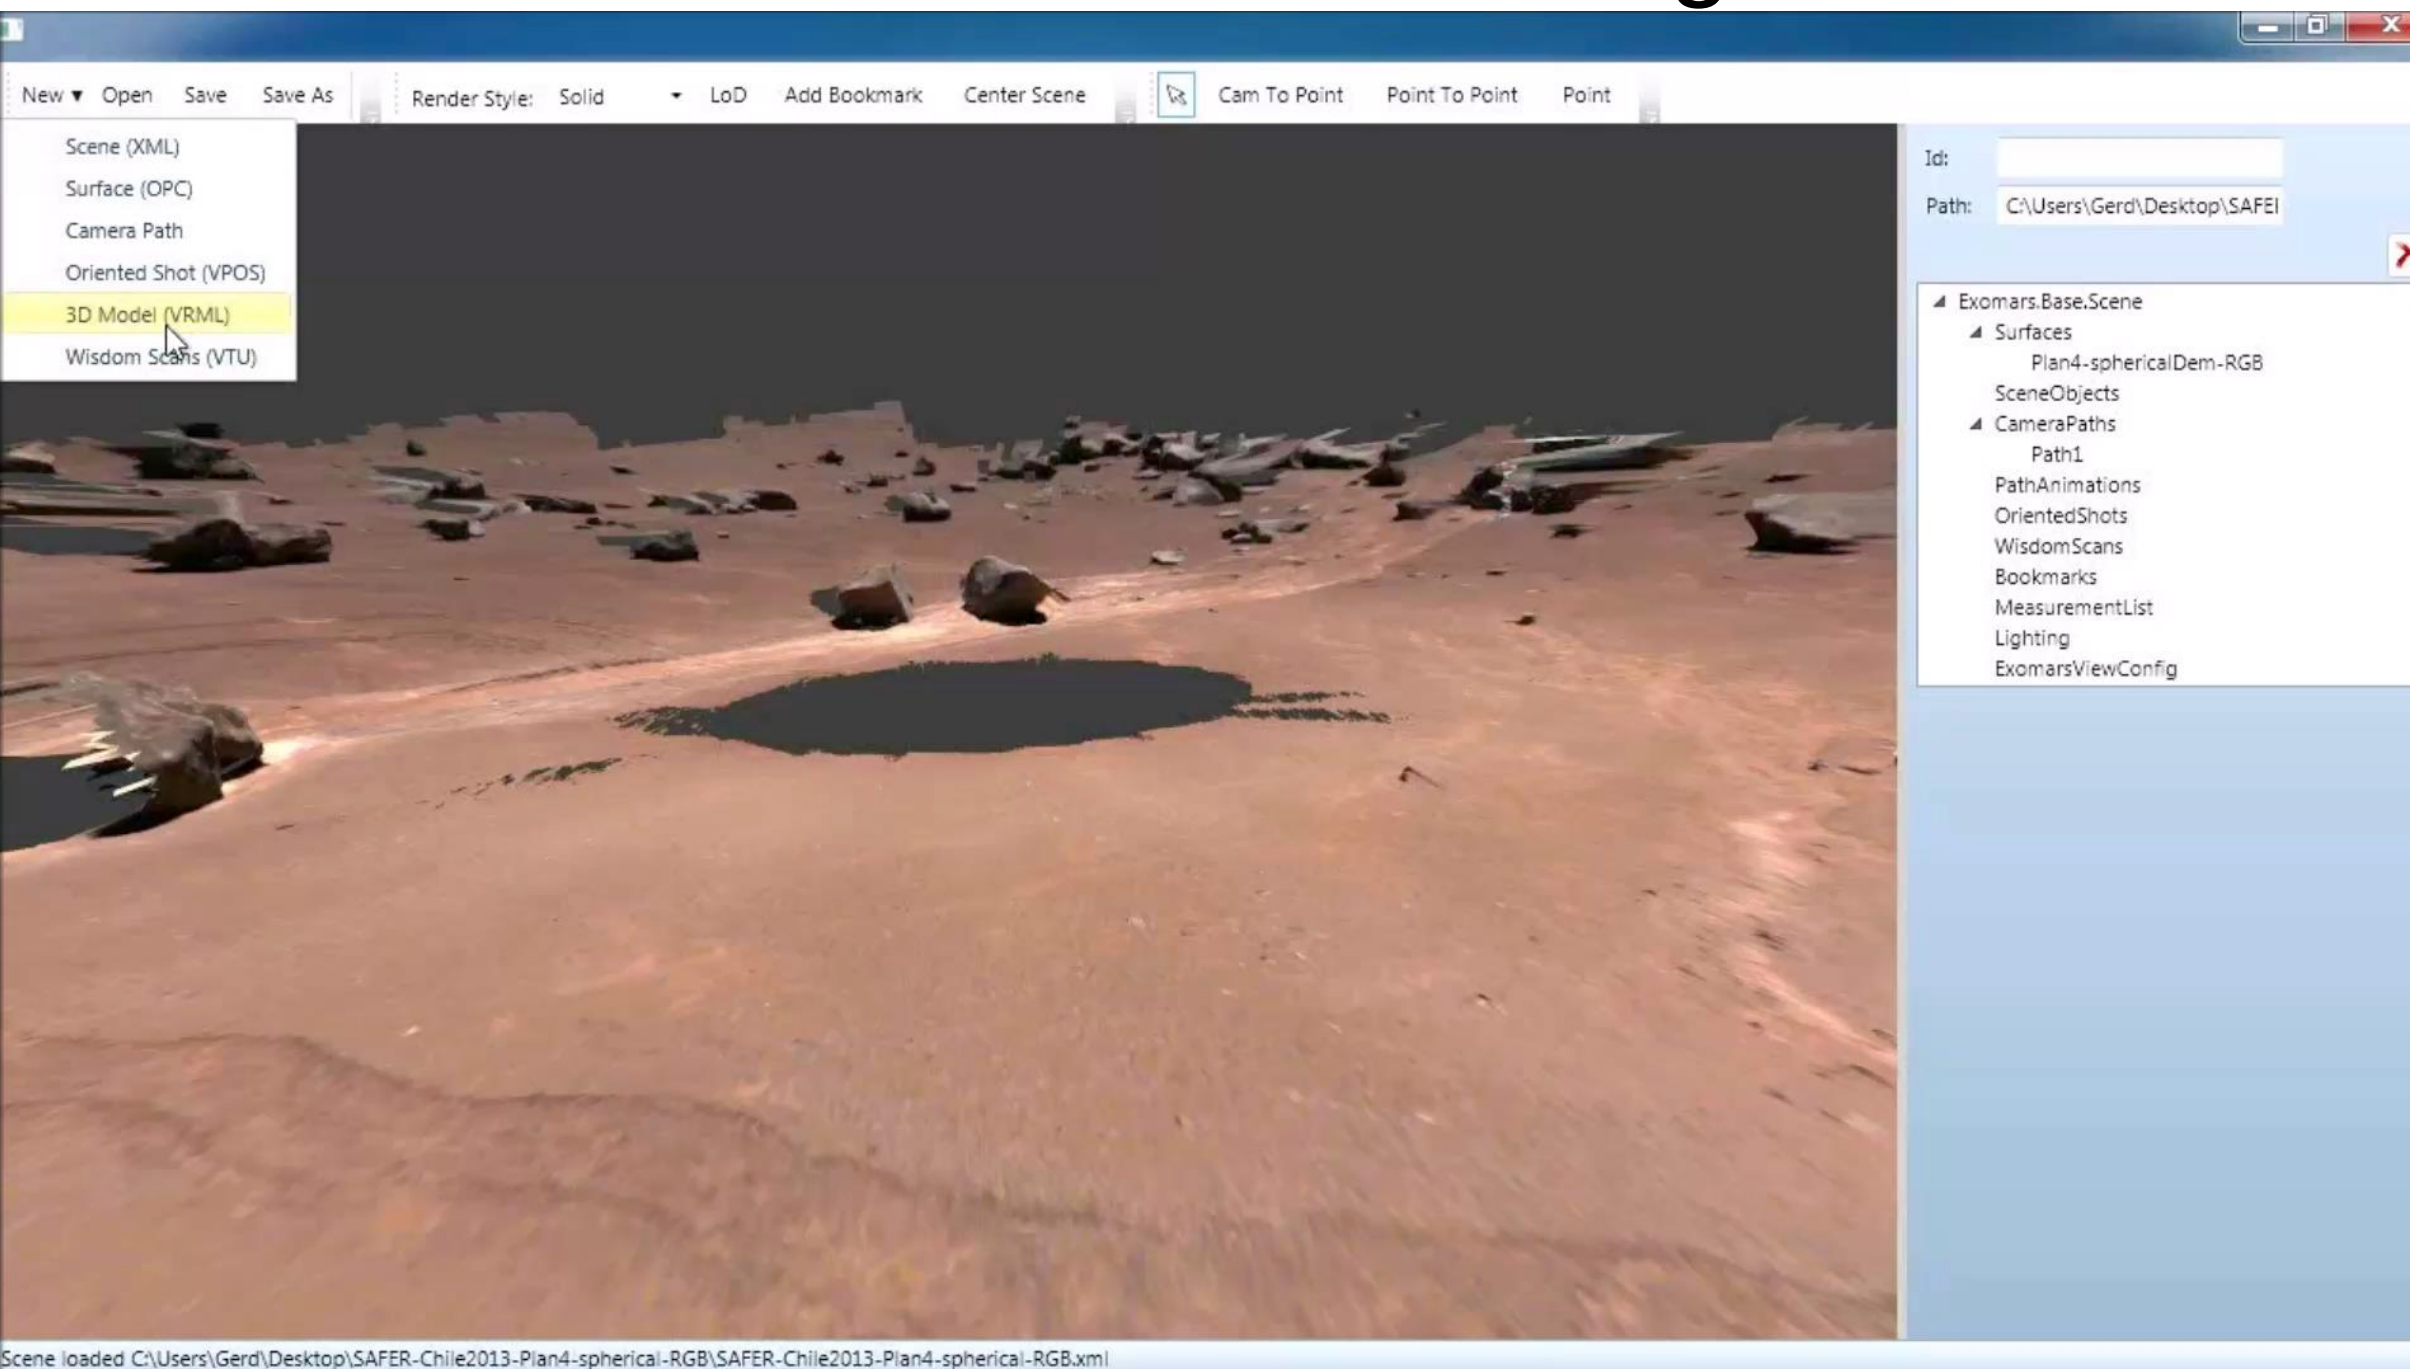

Credits:  
SAFER Team /  
WISDOM Team

# WISDOM after correct alignment

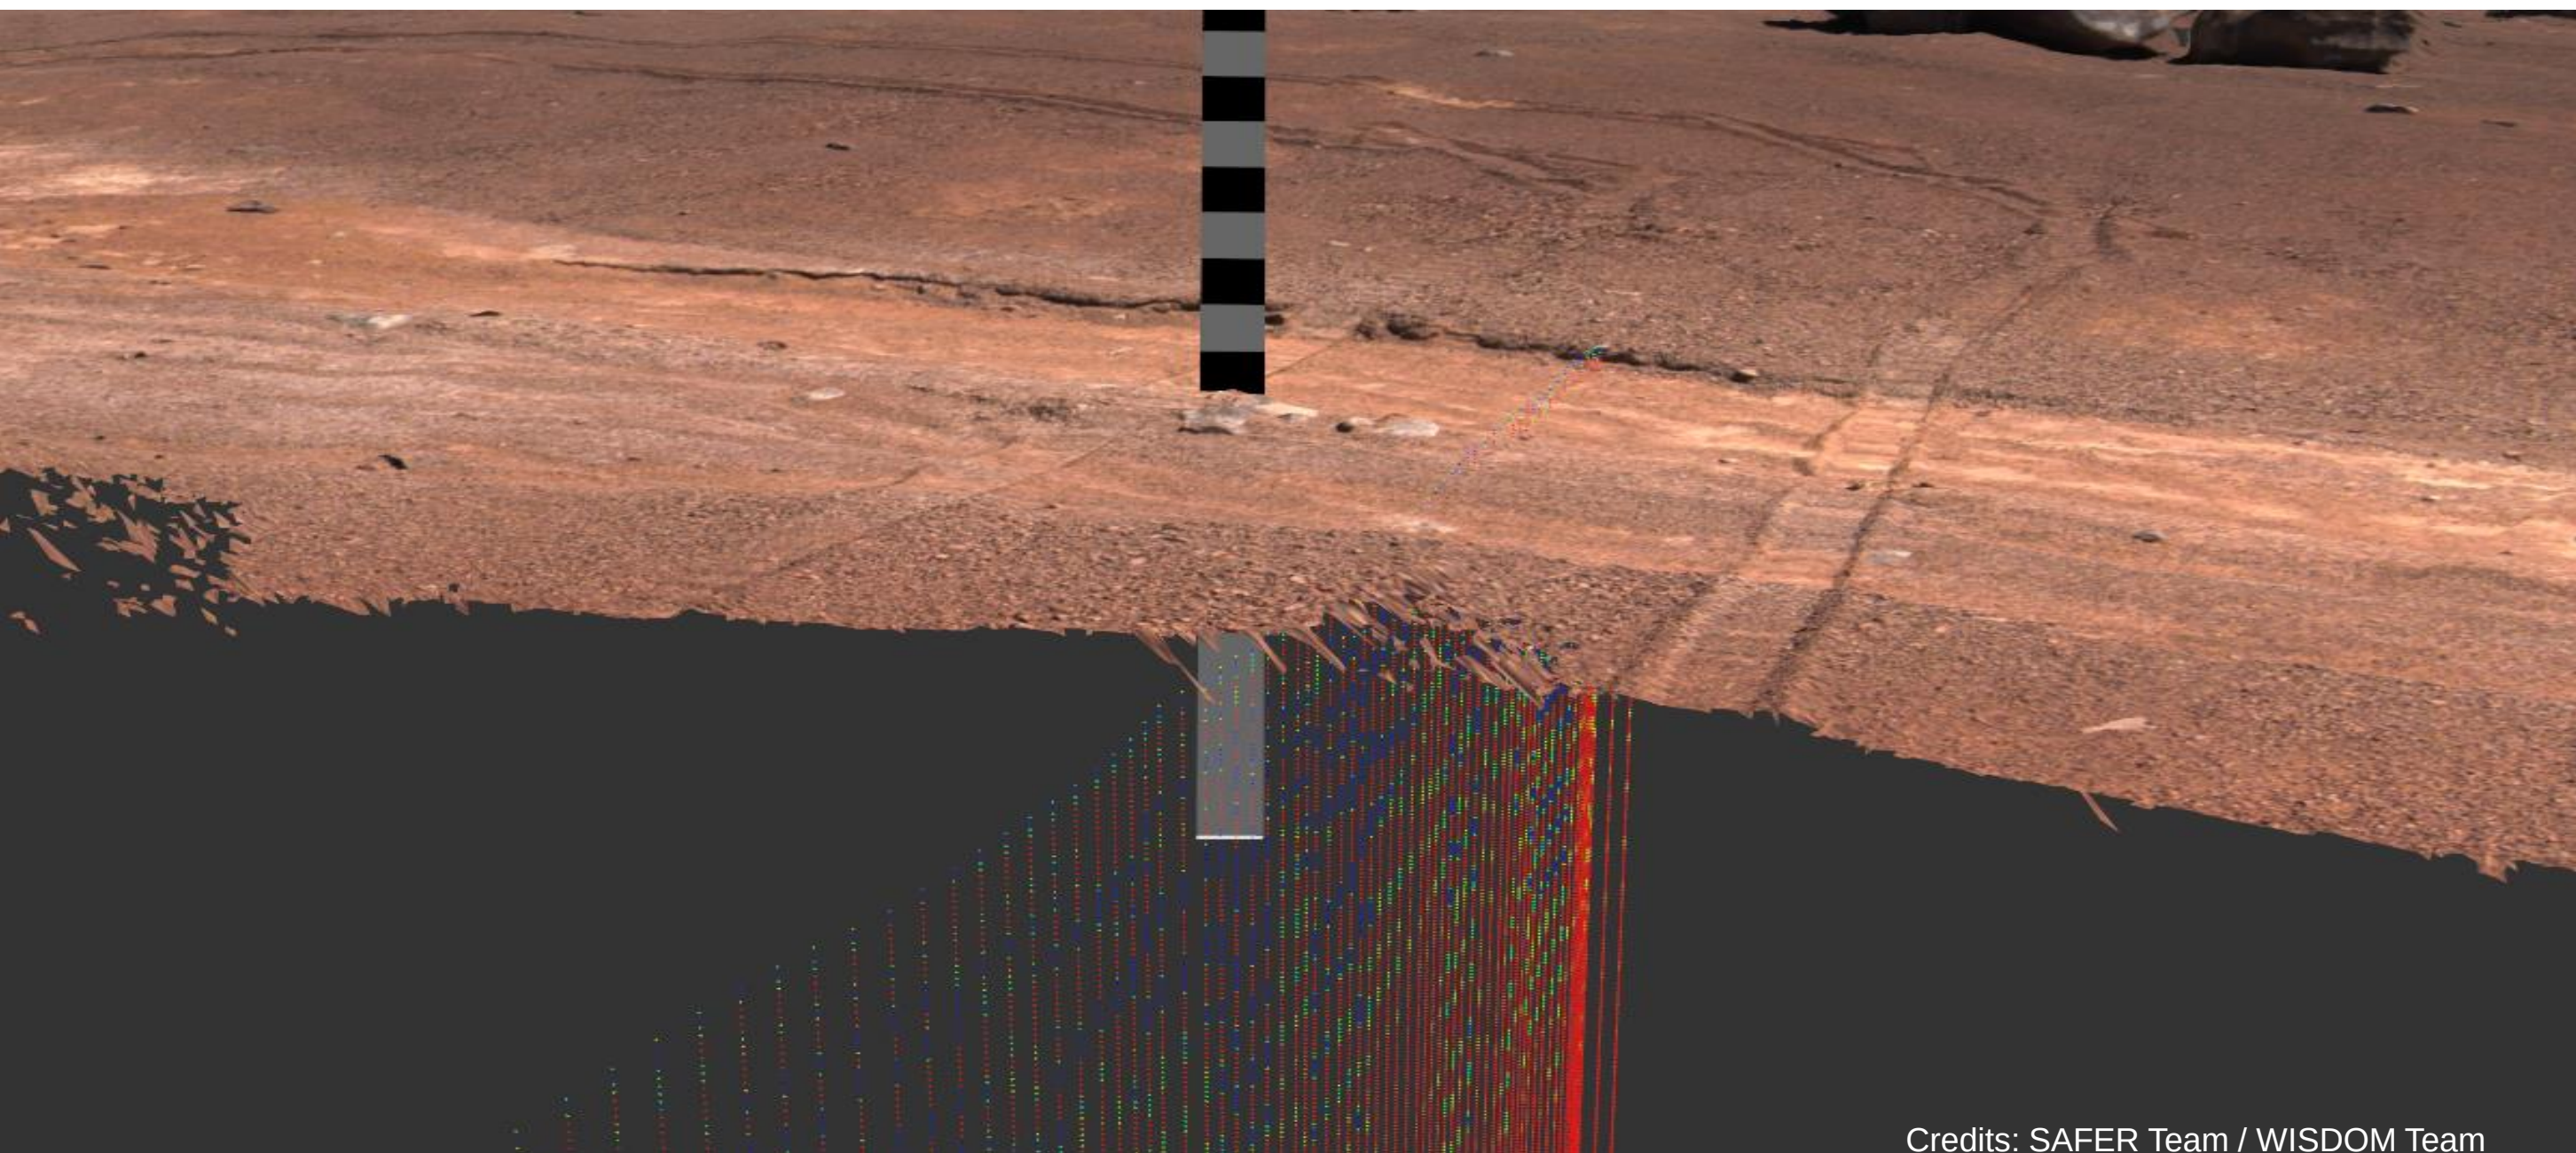




# Science Collaboration Aspect: Virtual Reality



27

- E.g. *RAVEN* Idea by Aberystwyth University
- Interactions on 3D Context & Instruments' data
  - Joint annotations
  - Joint Measurements
- Multiple PRo3D instances running in parallel

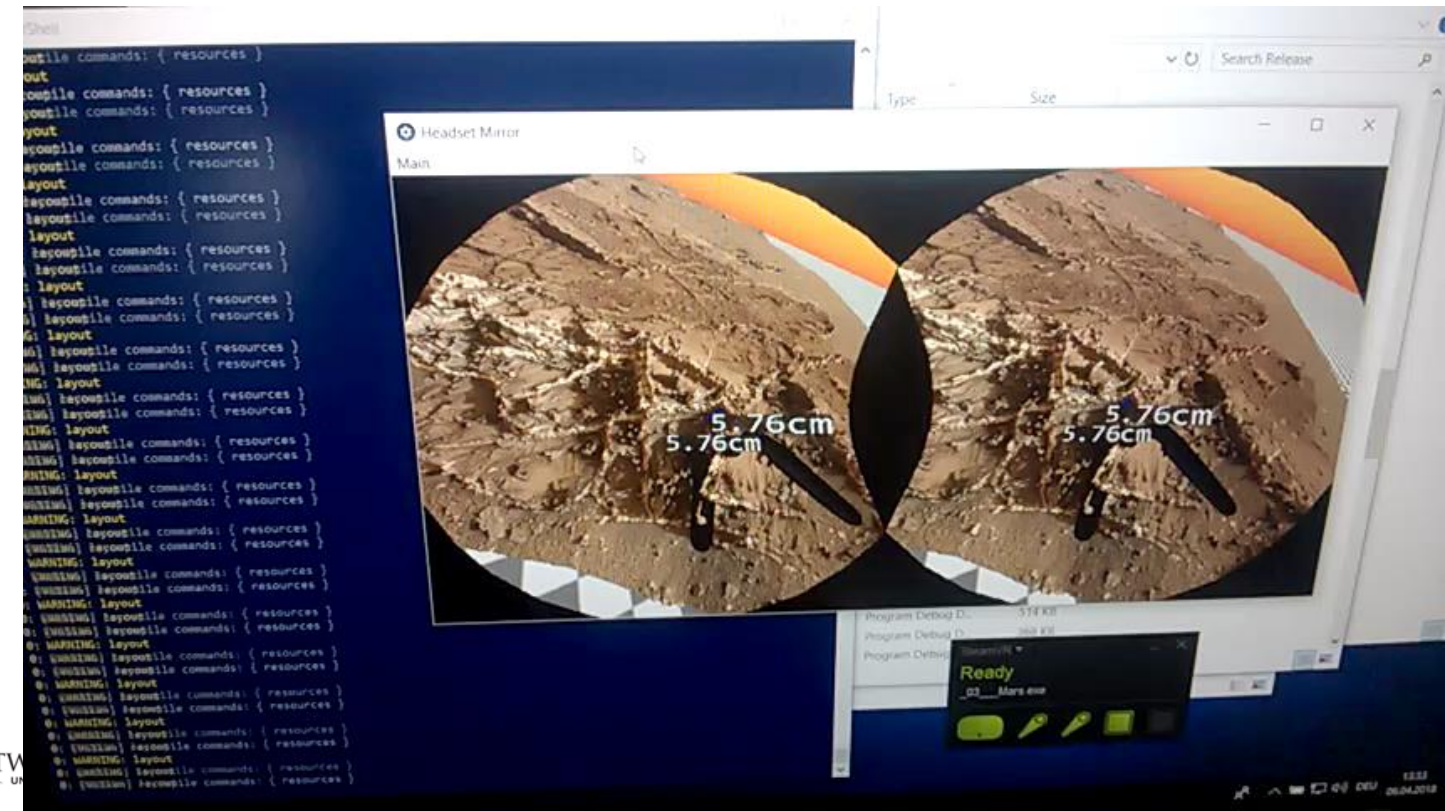

# Simulation by PRo3D (e.g. for training): Place Shatter Cones within „natural“ environment




- 3D Reconstruction of real (terrestrial) shatter cones
- Place them in real scene
- Check ability to find them at certain distance

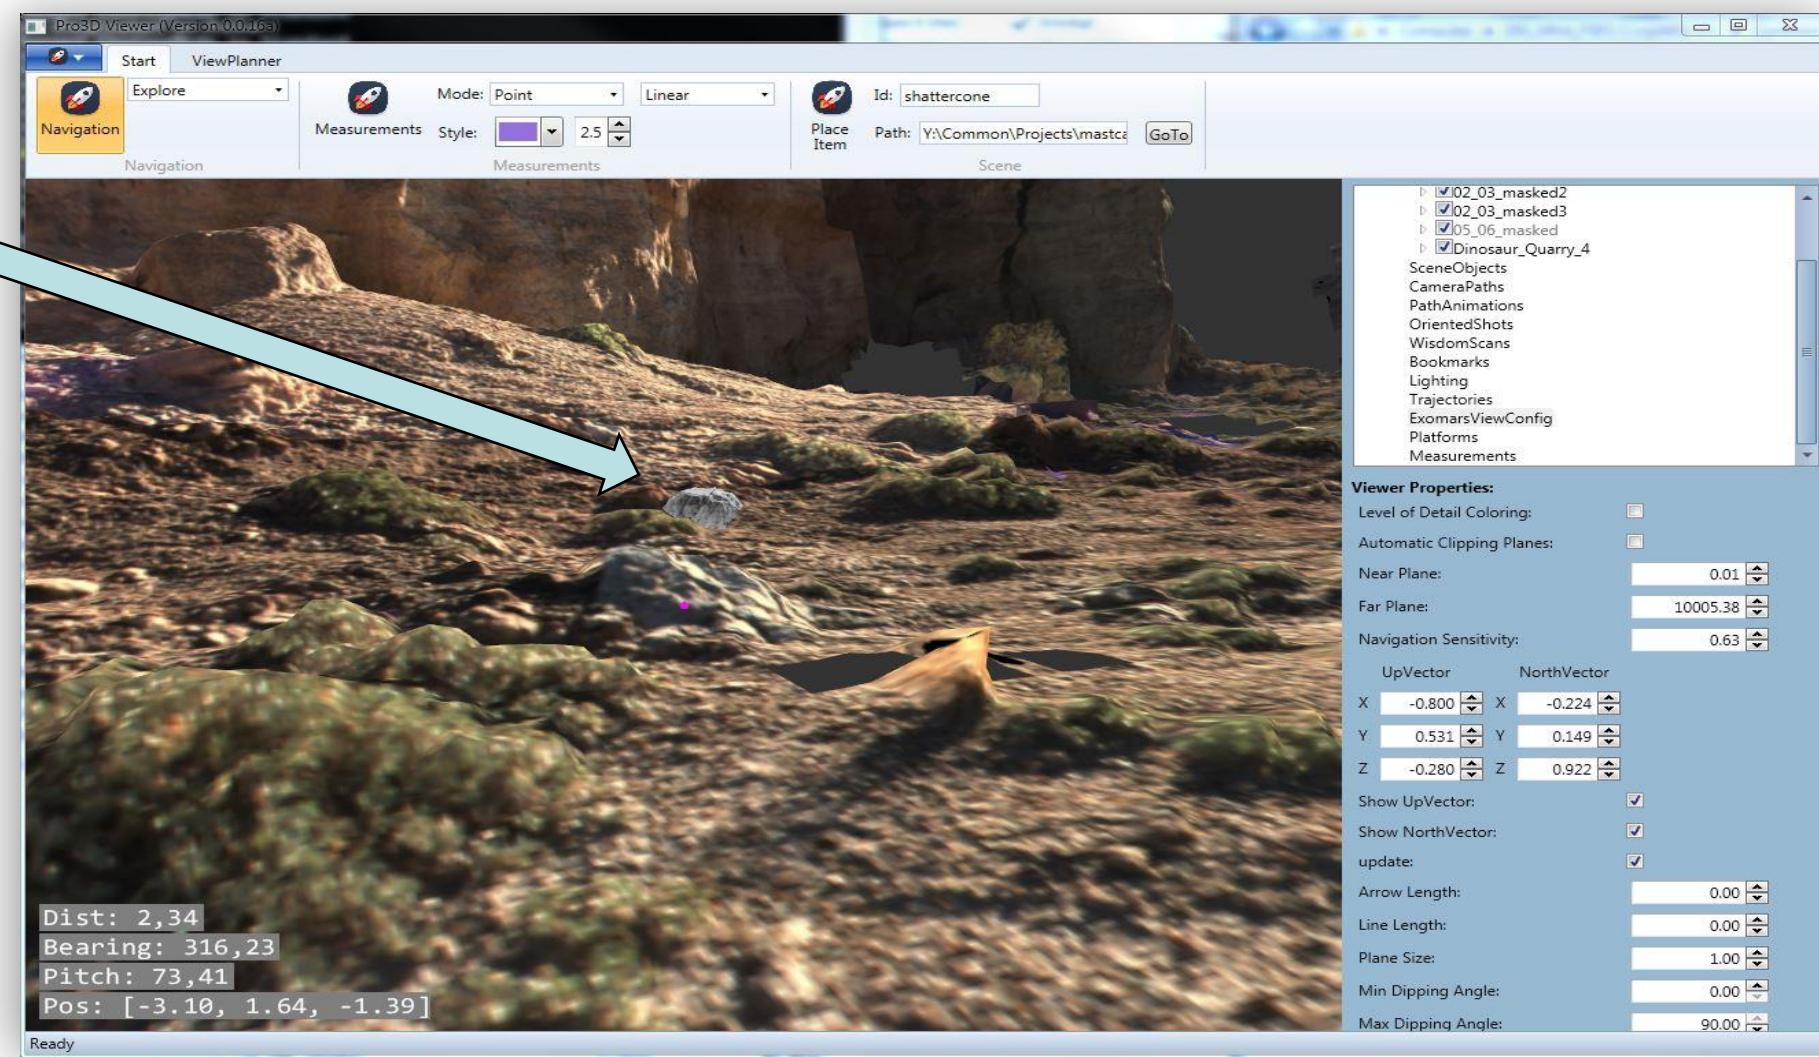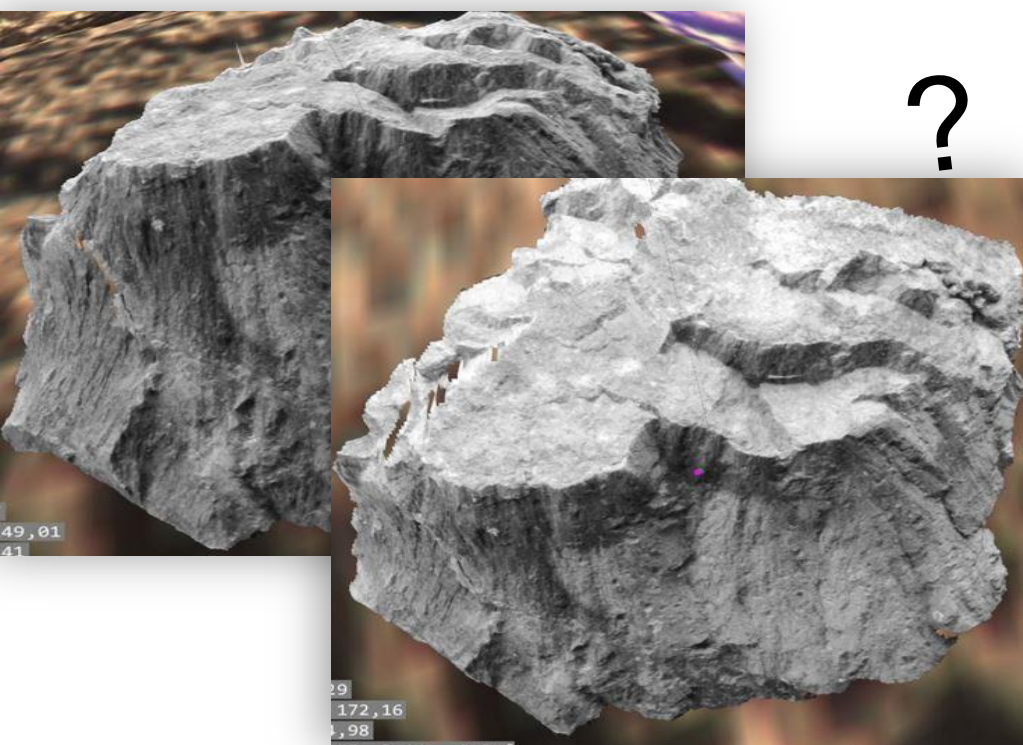

# Further Examples


29

Positive identification challenging, but feasible.

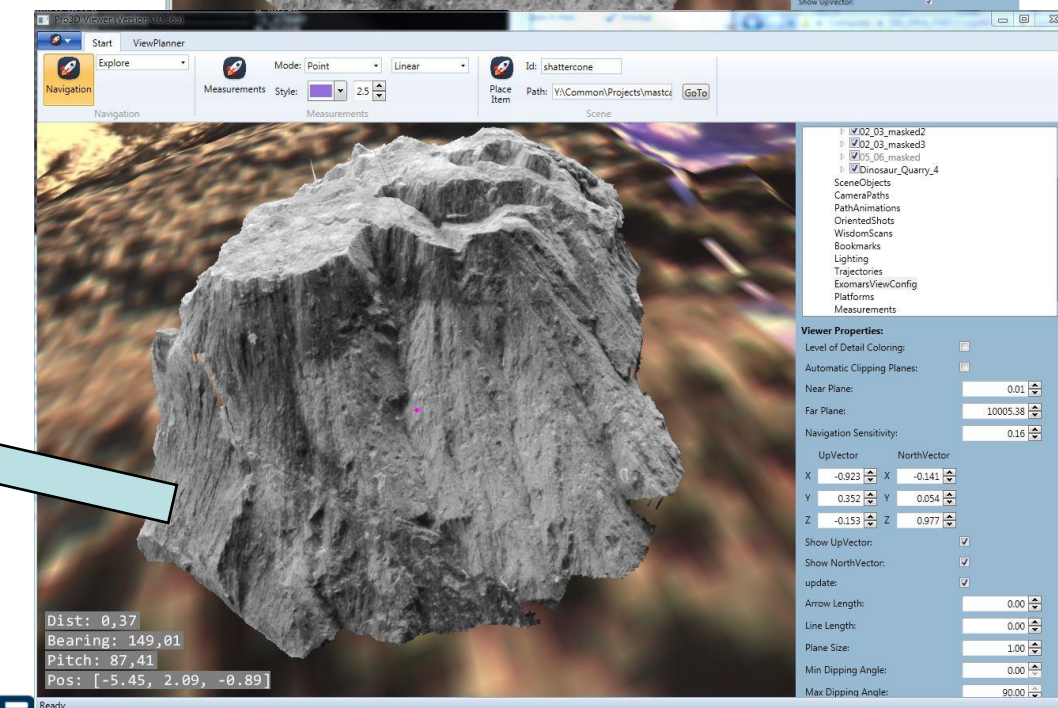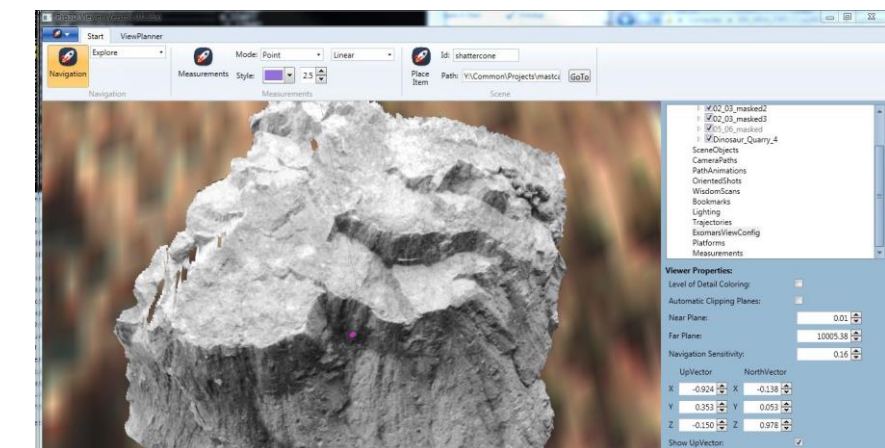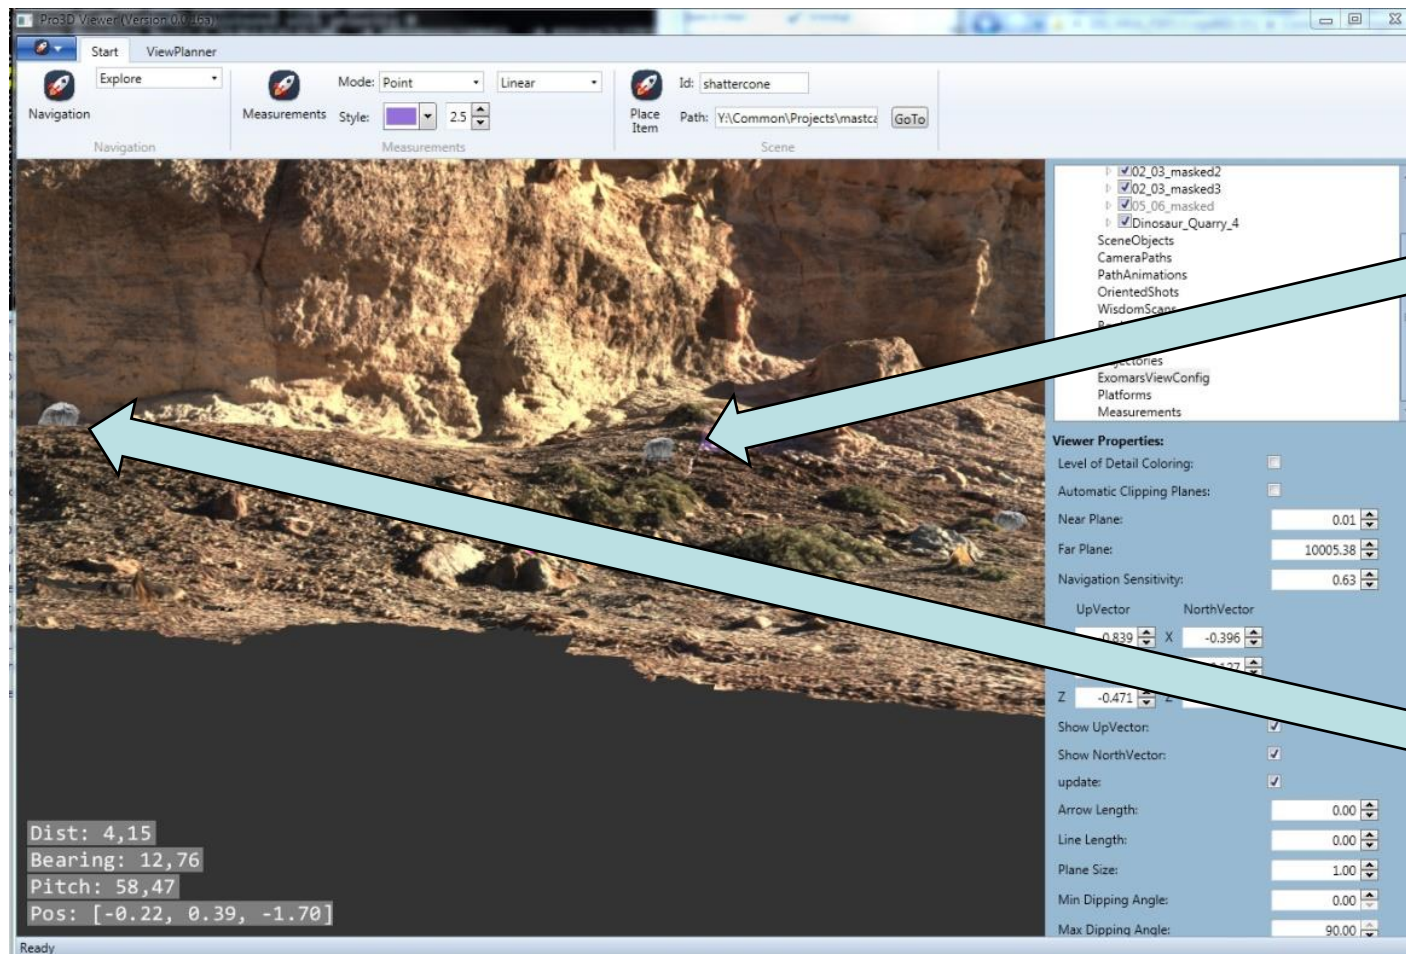

# Relevant Aspects not to forget...

- Updating SPICE Kernels & Instruments' calibration conditions
  - Versioning in 3D products / localization of instrument data
- Archiving OPCs
  - Not PDS4 – compatible
- Maintaining a unique 3D data base (cf JPL/ASTTRO)
  - Fusion of HiRISE DTM & Rover imagery
  - Mixture between engineering & science-driven products
  - Versioning, related to source data coming in, SPICE & calibration updates,....
- Access rights to data between international teams
  - Adding credentials to each data element?
- Tools' et al originators to be mentioned in publications (Digital watermarks...?)
- PSA Synergies? → 3D GIS Functionality / close-range & multi-scale capabilities / ....
- .... Many more aspects, requires workshop/s & training on their own

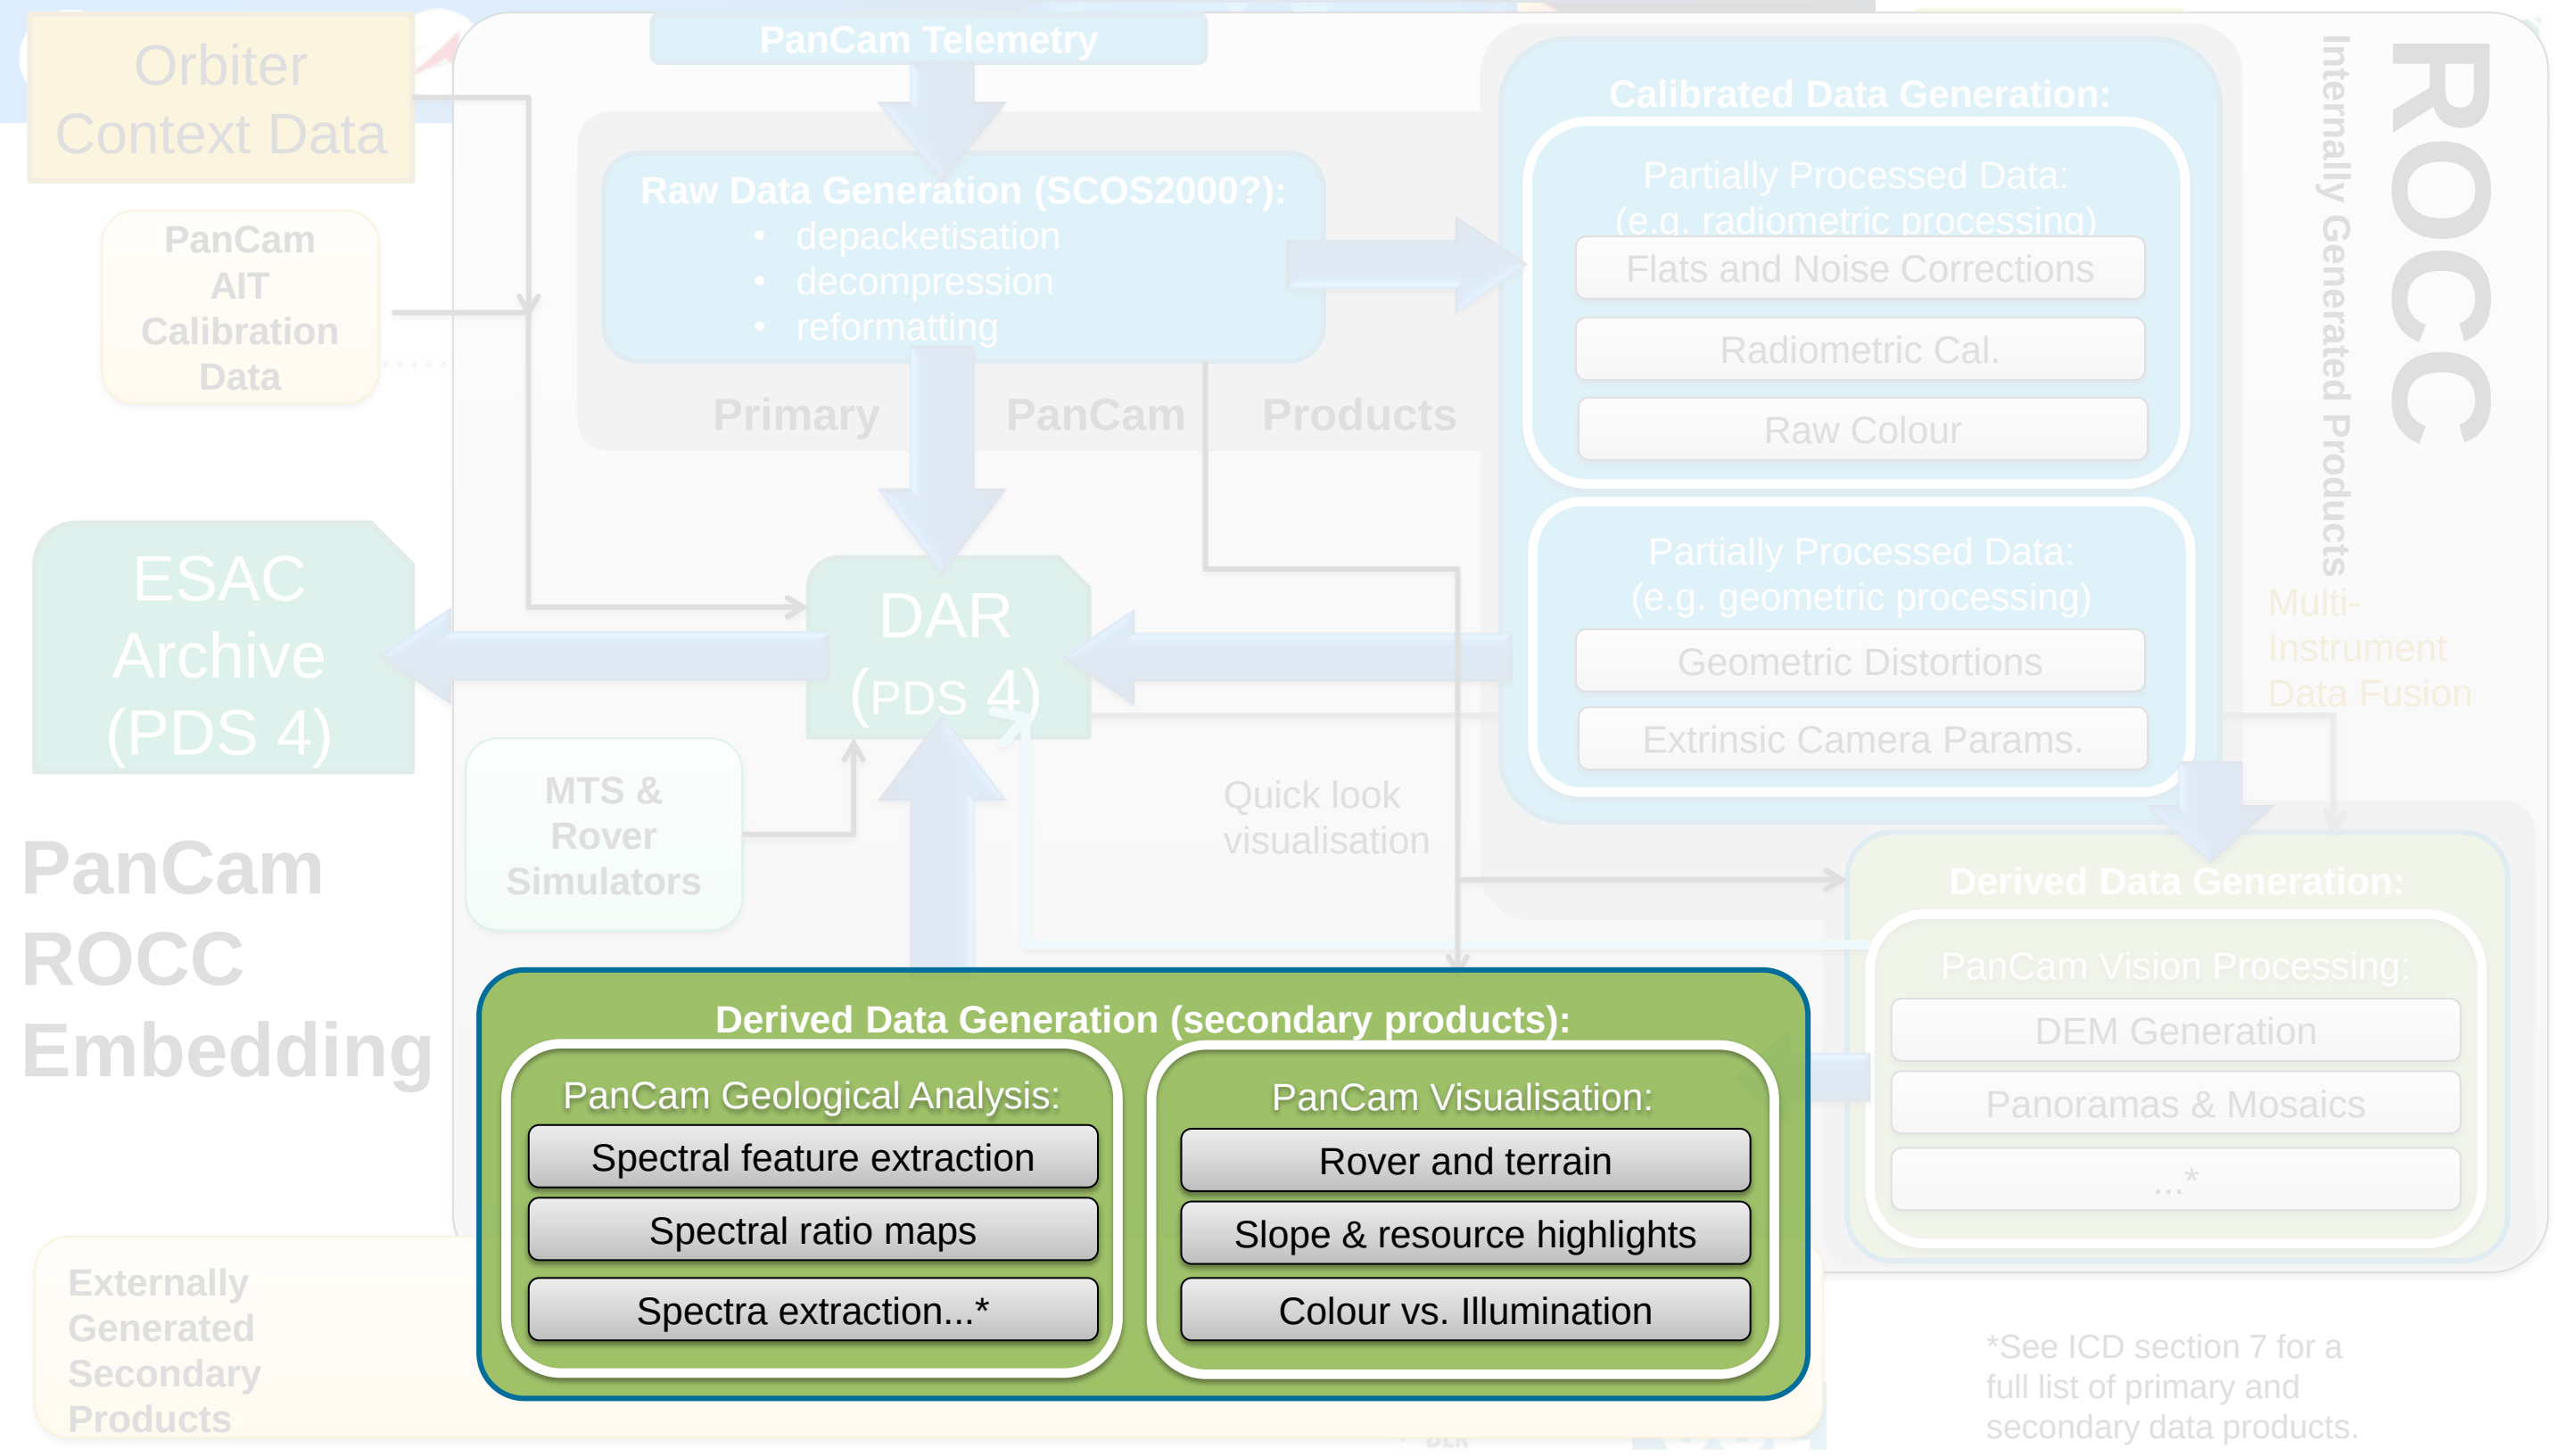

# ROCC

Internally Generated Products

Multi-Instrument Data Fusion

## Calibrated Data Generation:

Partially Processed Data:  
(e.g. radiometric processing)

Flats and Noise Corrections

Radiometric Cal.

Raw Colour

Partially Processed Data:  
(e.g. geometric processing)

Geometric Distortions

Extrinsic Camera Params.

## Derived Data Generation:

PanCam Vision Processing:

DEM Generation

Panoramas & Mosaics

...\*

PanCam Telemetry

## Raw Data Generation (SCOS2000?):

- depacketisation
- decompression
- reformatting

Primary

PanCam

Products

DAR  
(PDS 4)

**PanCam tools  
Get usable for entire mission**

Quick look  
visualisation

MTS &  
Rover  
Simulators

## General Scientific Exploitation Support

Scientific Analysis Support:

(Spectral et al) feature Selection

Global Context of Observations

(Immersive) **Collaboration**

Instruments' Visualisation:

Rover and terrain

Call up Instruments' HMIs

& Annotation

Orbiter  
Context Data

PanCam  
AIT  
Calibration  
Data

ESAC  
Archive  
(PDS 4)


PanCam  
ROCC  
Embedding

Externally  
Generated  
Secondary  
Products

\*See ICD section 7 for a full list of primary and secondary data products.

# Validation started: MSL Data Processing Results & Visualization in Use by Scientists

Barnes et al, 2018

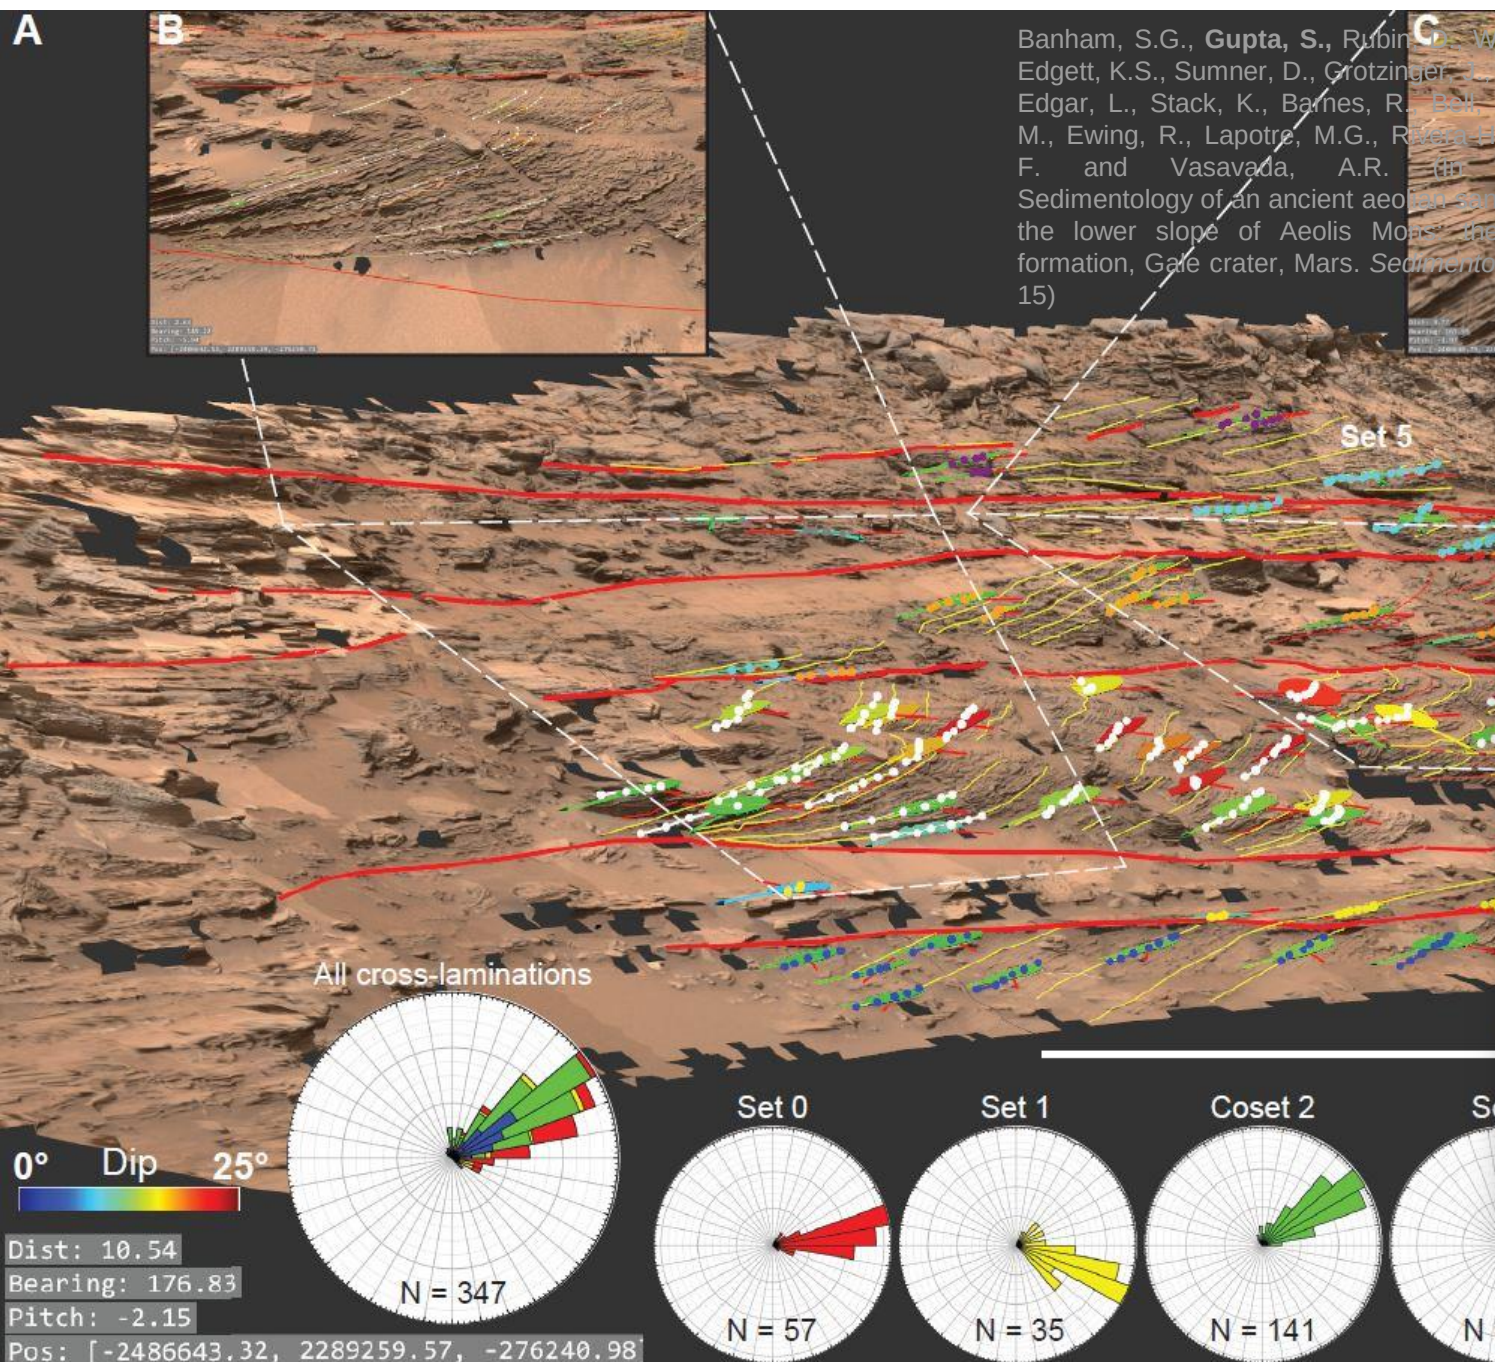

Banham, S.G., Gupta, S., Rubin, D., Watkins, J., Edgett, K.S., Sumner, D., Grotzinger, J., Lewis, K., Edgar, L., Stack, K., Barnes, R., Bell, J.F., Day, M., Ewing, R., Lapotre, M.G., Rivera-Hernandez, F. and Vasavada, A.R. (in press) Sedimentology of an ancient aeolian sand dune on the lower slope of Aeolis Mons, the formation, Gale crater, Mars. *Sedimentology* 15)

AGU100 ADVANCING EARTH AND SPACE SCIENCE

## Earth and Space Science

### RESEARCH ARTICLE

10.1002/2018EA000374

#### Special Section:

Planetary Mapping: Methods, Tools for Scientific Analysis and Exploration

#### Key Points:

- Processing of images from stereo-cameras on Mars rovers produces 3-D Digital Outcrop Models (DOMs) which are rendered and analyzed in PRo3D
- PRo3D enables efficient, real-time rendering and geological analysis of the DOMs, allowing extraction of large amounts of quantitative data
- Methodologies for sedimentological and structural DOM analyses in PRo3D are presented at four localities along the MSL and MER traverses

#### Supporting Information:

- Supporting Information S1
- Data Set S1
- Data Set S2
- Data Set S3
- Data Set S4
- Data Set S5
- Data Set S6
- Data Set S7
- Data Set S8
- Data Set S9
- Data Set S10
- Data Set S11

## Geological Analysis of Martian Rover-Derived Digital Outcrop Models Using the 3-D Visualization Tool, Planetary Robotics 3-D Viewer—PRo3D

Robert Barnes<sup>1</sup>, Sanjeev Gupta<sup>1</sup>, Christoph Traxler<sup>2</sup>, Thomas Ortner<sup>2</sup>, Arnold Bauer<sup>3</sup>, Gerd Hesina<sup>2</sup>, Gerhard Paar<sup>3</sup>, Ben Huber<sup>3,4</sup>, Kathrin Juhart<sup>3</sup>, Laura Fritz<sup>2</sup>, Bernhard Nauschneegg<sup>3</sup>, Jan-Peter Muller<sup>5</sup>, and Yu Tao<sup>5</sup>

<sup>1</sup>Department of Earth Science and Engineering, Imperial College London, London, UK, <sup>2</sup>VRVis Zentrum für Virtual Reality und Visualisierung Forschungs-GmbH, Vienna, Austria, <sup>3</sup>Joanneum Research, Graz, Austria, <sup>4</sup>Now at ETH Zürich, Zürich, Switzerland, <sup>5</sup>Mullard Space Science Laboratory, University College London, London, UK





**Abstract** Panoramic camera systems on robots exploring the surface of Mars are used to collect images of terrain and rock outcrops which they encounter along their traverse. Image mosaics from these cameras are essential in mapping the surface geology and selecting locations for analysis by other instruments on the rover's payload. 2-D images do not truly portray the depth of field of features within an image, nor their 3-D geometry. This paper describes a new 3-D visualization software tool for geological analysis of Martian rover-derived Digital Outcrop Models created using photogrammetric processing of stereo-images using the Planetary Robotics Vision Processing tool developed for 3-D vision processing of ExoMars PanCam and Mars 2020 Mastcam-Z data. Digital Outcrop Models are rendered in real time in the Planetary Robotics 3-D Viewer PRo3D, allowing scientists to roam outcrops as in a terrestrial field campaign. Digitization of point, line, and polyline features is used for measuring the physical dimensions of geological features and communicating interpretations. Dip and strike of bedding and fractures is measured by digitizing a polyline along the contact or fracture trace, through which a best fit plane is plotted. The attitude of this plane is calculated in the software. Here we apply these tools to analysis of sedimentary rock outcrops and quantification of the geometry of fracture systems encountered by the science teams of NASA's Mars Exploration Rover *Opportunity* and Mars Science Laboratory rover *Curiosity*. We show the benefits PRo3D allows for visualization and collection of geological interpretations and analyses from rover-derived stereo-images.

HRC CLUPI ISEM WAC WISDOM


# On Panorama Viewing...



## ExoFit Examples

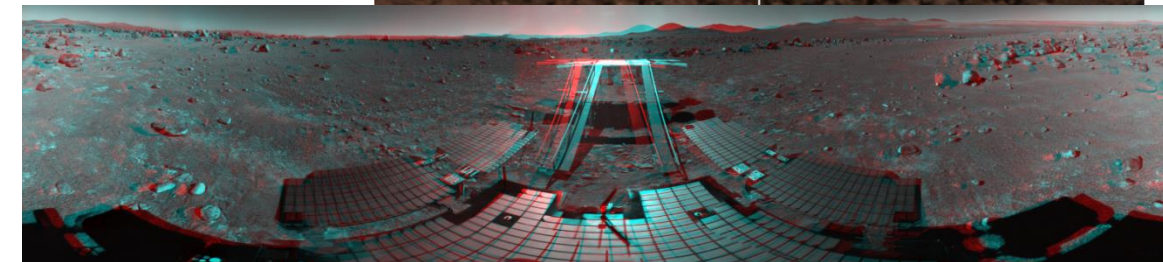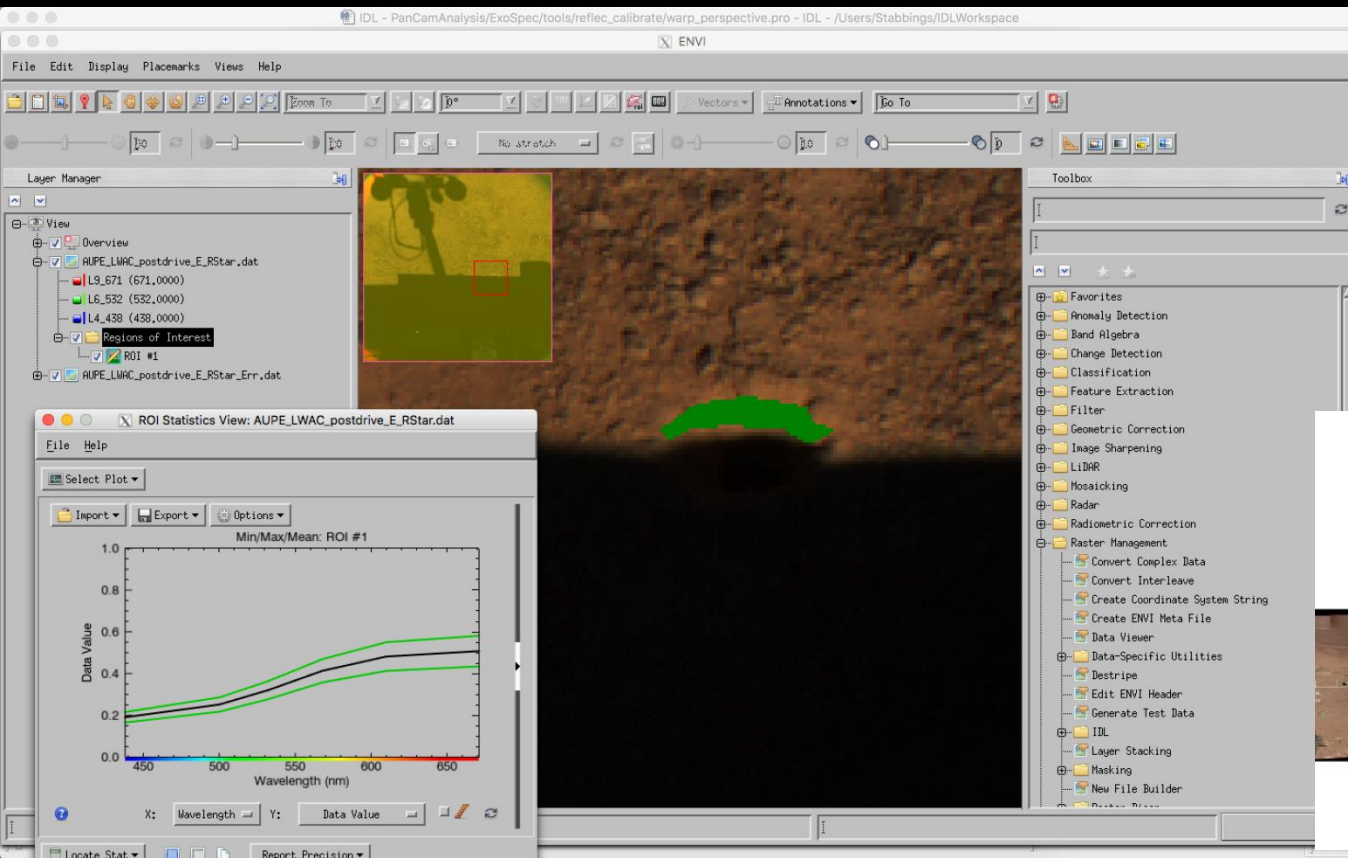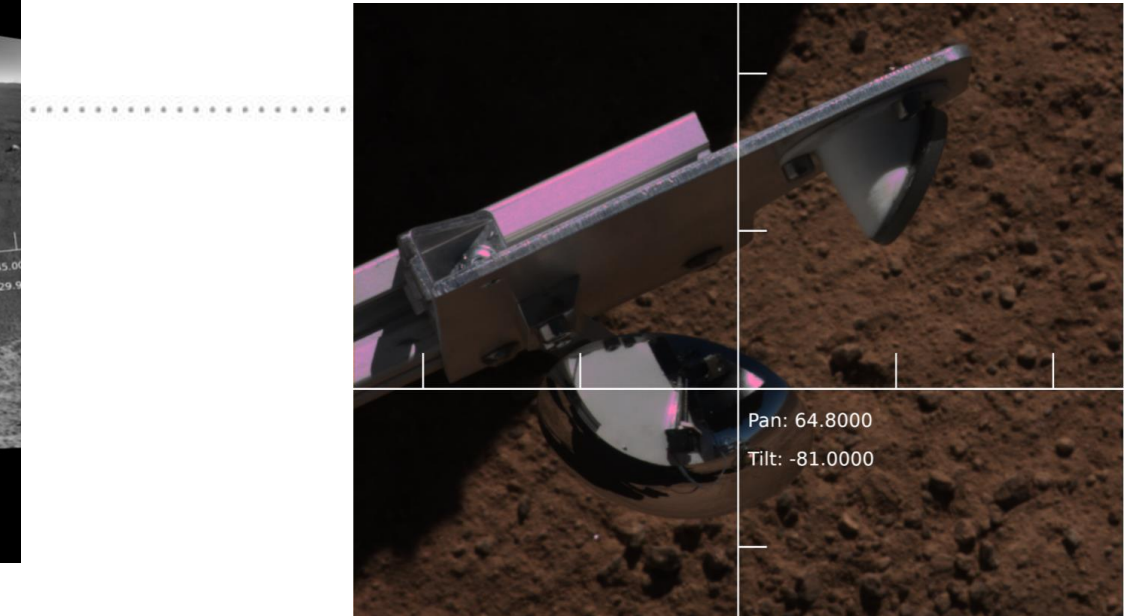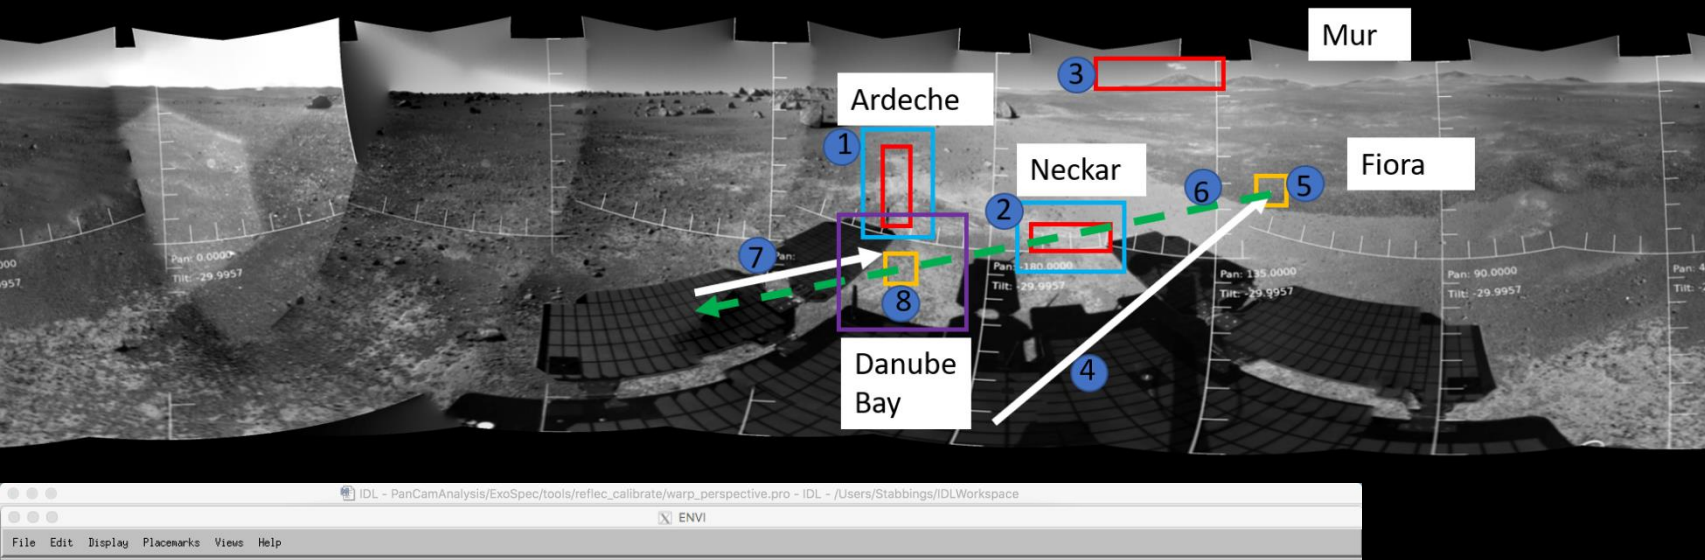


toward lava  
past  
dupi  
HRC  
ISEM  
downward

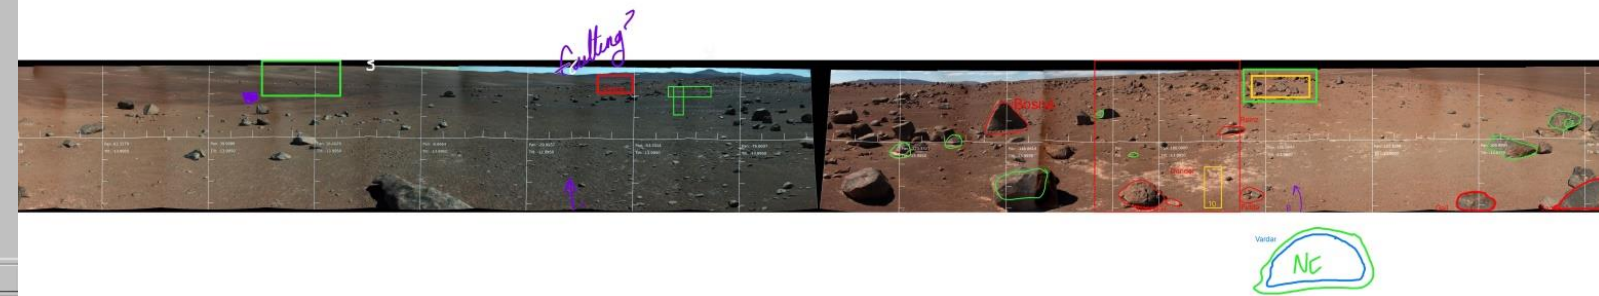

# Currently discussing: JR ImageVector Viewer (ImpactViewer): Panoramas & (multispectral) Images

Arbitrary layers: Distance, filters, ... Various analysis & edit modes, configurable

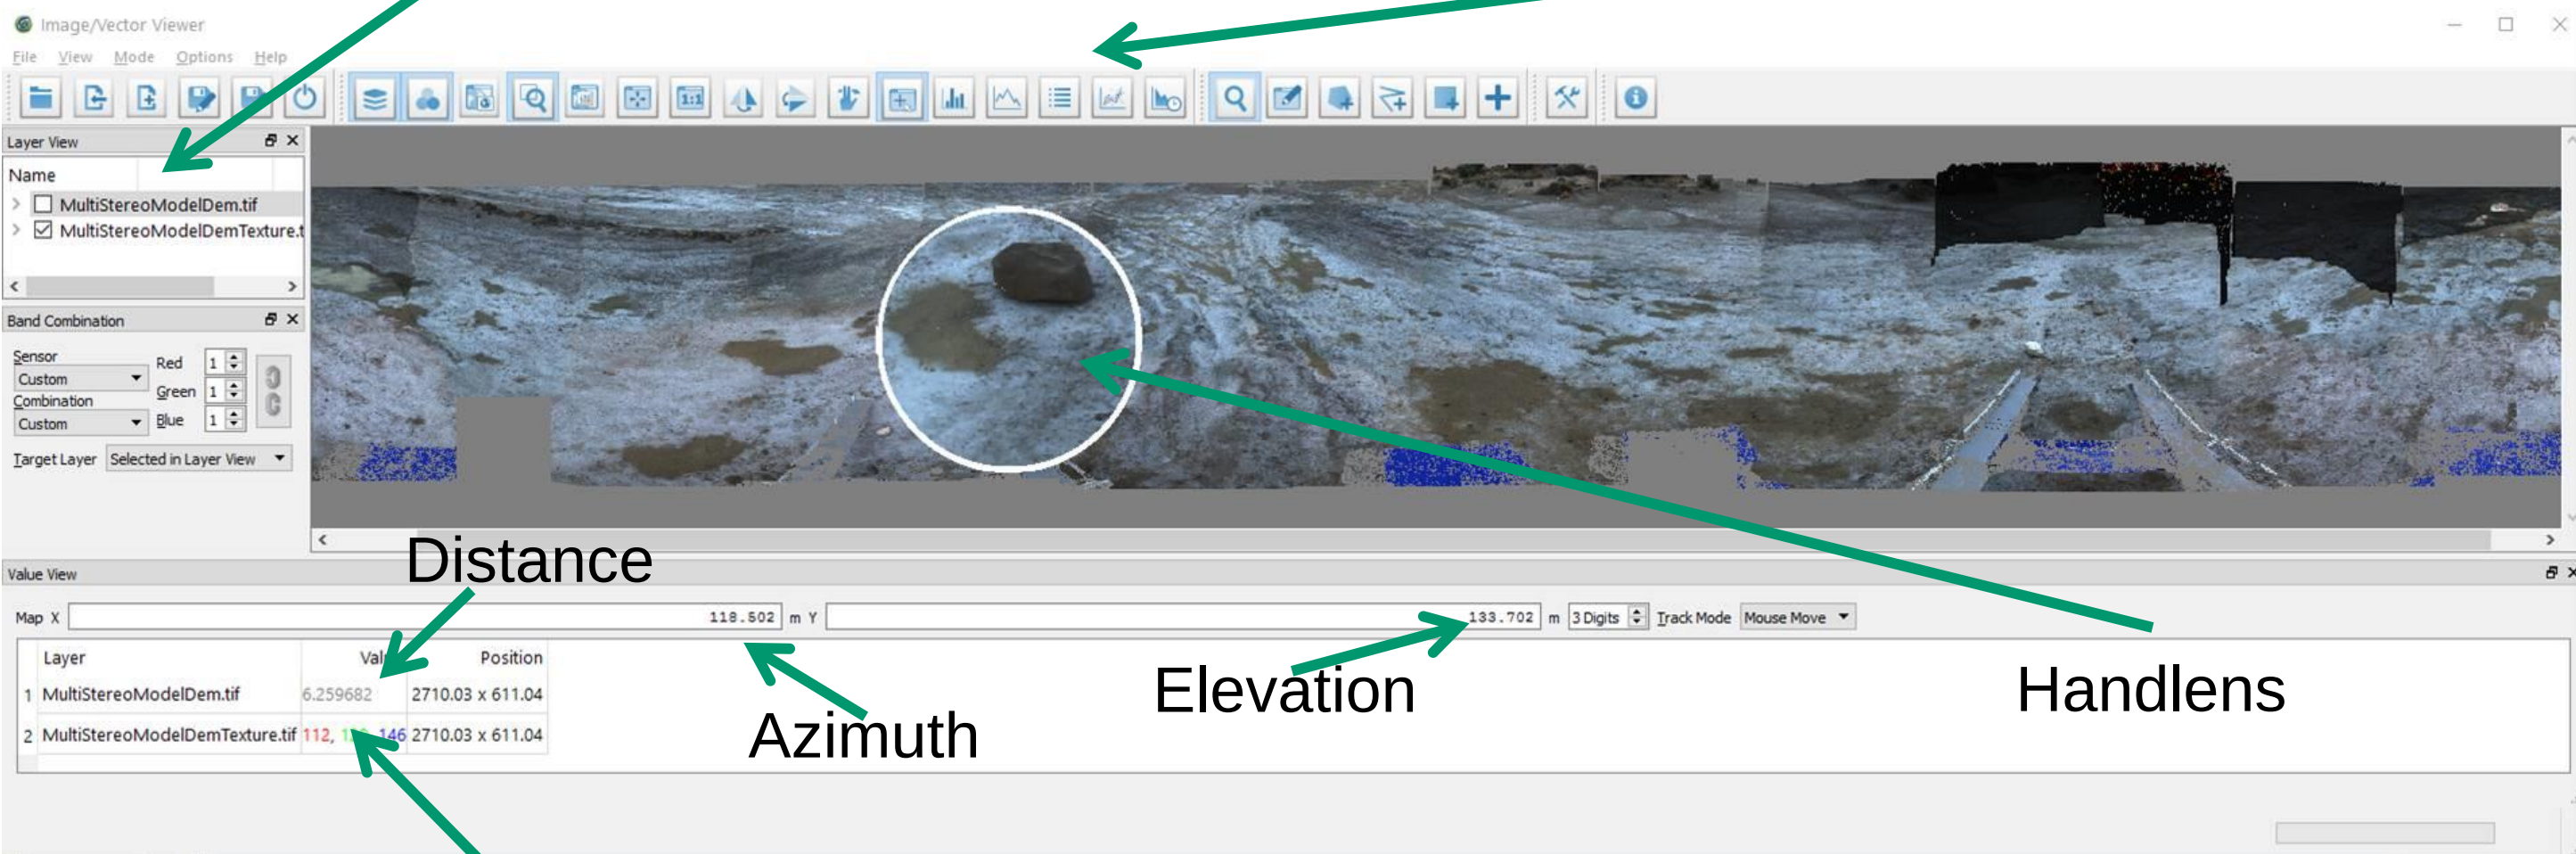

Distance

Azimuth

Elevation

Handlens

Color Values

Thanks...

Gerhard.paar@joanneum.at

### Introduction & Rationale

Planetary rover missions use panoramic stereo camera systems to image rock outcrops along rover traverses, in order to characterize their geological history and focus the search for ancient biosignatures. Stereo imaging from the ESA ExoMars PanCam [1] and NASA Mars2020 Mastcam-Z [3] instruments is important to investigate terrain and geology through 3-D vision.

3D processing of images from these stereo cameras creates Digital Outcrop Models (DOMs) from which the following data can be extracted: grain size where visible; layer geometries; cross-bedding orientations from which palaeoflow can be calculated [4][5] and sedimentary structure dimensions. These data assist in the robust interpretation of sedimentary facies for paleoenvironmental reconstruction. A main target is also the detection and understanding of impact breccias, shatter cones, and other materials of impact origin.

We report on the validation of the tools that enable such analysis as an important prerequisite for scientific soundness of any investigation building on the data and data assessment tools.

### Testing Strategy, Instrument & Data


The first stages of the validation process took place at Brimham Rocks [5], Yorkshire, UK, in July and August 2017. Three outcrops of spectacular fluvial cross-bedded sandstones were imaged extensively using the Aberystwyth University PanCam Emulator (AUPE, Figure 1) [6]. Reference measurements included general scale, bedset thicknesses, layer thicknesses, grain size & variation, as well as dip and strike of layers, foresets, set boundaries and cross beds. Table 1 shows an overview of captured data.

Future work will involve fully geo-registering the image data, to ensure that field measurements can be directly compared, processing wide baseline stereo, and perfection of geometric calibration & radiometric color blending



| File Name                 | Location | Instrument | Resolution | Scale | Grain Size | Layer Thickness | Bedset Thickness | Dip    | Strike |
|---------------------------|----------|------------|------------|-------|------------|-----------------|------------------|--------|--------|
| 20170801_01_PanCam_01.tif | Br 100   | AUPE       | 1024x1024  | 2m    | 0.1-0.5mm  | 0.1-0.5m        | 0.5-1m           | 10-20° | 0-90°  |
| 20170801_02_PanCam_02.tif | Br 100   | AUPE       | 1024x1024  | 2m    | 0.1-0.5mm  | 0.1-0.5m        | 0.5-1m           | 10-20° | 0-90°  |
| 20170801_03_PanCam_03.tif | Br 100   | AUPE       | 1024x1024  | 2m    | 0.1-0.5mm  | 0.1-0.5m        | 0.5-1m           | 10-20° | 0-90°  |
| 20170801_04_PanCam_04.tif | Br 100   | AUPE       | 1024x1024  | 2m    | 0.1-0.5mm  | 0.1-0.5m        | 0.5-1m           | 10-20° | 0-90°  |
| 20170801_05_PanCam_05.tif | Br 100   | AUPE       | 1024x1024  | 2m    | 0.1-0.5mm  | 0.1-0.5m        | 0.5-1m           | 10-20° | 0-90°  |
| 20170801_06_PanCam_06.tif | Br 100   | AUPE       | 1024x1024  | 2m    | 0.1-0.5mm  | 0.1-0.5m        | 0.5-1m           | 10-20° | 0-90°  |
| 20170801_07_PanCam_07.tif | Br 100   | AUPE       | 1024x1024  | 2m    | 0.1-0.5mm  | 0.1-0.5m        | 0.5-1m           | 10-20° | 0-90°  |
| 20170801_08_PanCam_08.tif | Br 100   | AUPE       | 1024x1024  | 2m    | 0.1-0.5mm  | 0.1-0.5m        | 0.5-1m           | 10-20° | 0-90°  |
| 20170801_09_PanCam_09.tif | Br 100   | AUPE       | 1024x1024  | 2m    | 0.1-0.5mm  | 0.1-0.5m        | 0.5-1m           | 10-20° | 0-90°  |
| 20170801_10_PanCam_10.tif | Br 100   | AUPE       | 1024x1024  | 2m    | 0.1-0.5mm  | 0.1-0.5m        | 0.5-1m           | 10-20° | 0-90°  |
| 20170801_11_PanCam_11.tif | Br 100   | AUPE       | 1024x1024  | 2m    | 0.1-0.5mm  | 0.1-0.5m        | 0.5-1m           | 10-20° | 0-90°  |
| 20170801_12_PanCam_12.tif | Br 100   | AUPE       | 1024x1024  | 2m    | 0.1-0.5mm  | 0.1-0.5m        | 0.5-1m           | 10-20° | 0-90°  |
| 20170801_13_PanCam_13.tif | Br 100   | AUPE       | 1024x1024  | 2m    | 0.1-0.5mm  | 0.1-0.5m        | 0.5-1m           | 10-20° | 0-90°  |
| 20170801_14_PanCam_14.tif | Br 100   | AUPE       | 1024x1024  | 2m    | 0.1-0.5mm  | 0.1-0.5m        | 0.5-1m           | 10-20° | 0-90°  |
| 20170801_15_PanCam_15.tif | Br 100   | AUPE       | 1024x1024  | 2m    | 0.1-0.5mm  | 0.1-0.5m        | 0.5-1m           | 10-20° | 0-90°  |
| 20170801_16_PanCam_16.tif | Br 100   | AUPE       | 1024x1024  | 2m    | 0.1-0.5mm  | 0.1-0.5m        | 0.5-1m           | 10-20° | 0-90°  |
| 20170801_17_PanCam_17.tif | Br 100   | AUPE       | 1024x1024  | 2m    | 0.1-0.5mm  | 0.1-0.5m        | 0.5-1m           | 10-20° | 0-90°  |
| 20170801_18_PanCam_18.tif | Br 100   | AUPE       | 1024x1024  | 2m    | 0.1-0.5mm  | 0.1-0.5m        | 0.5-1m           | 10-20° | 0-90°  |
| 20170801_19_PanCam_19.tif | Br 100   | AUPE       | 1024x1024  | 2m    | 0.1-0.5mm  | 0.1-0.5m        | 0.5-1m           | 10-20° | 0-90°  |
| 20170801_20_PanCam_20.tif | Br 100   | AUPE       | 1024x1024  | 2m    | 0.1-0.5mm  | 0.1-0.5m        | 0.5-1m           | 10-20° | 0-90°  |
| 20170801_21_PanCam_21.tif | Br 100   | AUPE       | 1024x1024  | 2m    | 0.1-0.5mm  | 0.1-0.5m        | 0.5-1m           | 10-20° | 0-90°  |
| 20170801_22_PanCam_22.tif | Br 100   | AUPE       | 1024x1024  | 2m    | 0.1-0.5mm  | 0.1-0.5m        | 0.5-1m           | 10-20° | 0-90°  |
| 20170801_23_PanCam_23.tif | Br 100   | AUPE       | 1024x1024  | 2m    | 0.1-0.5mm  | 0.1-0.5m        | 0.5-1m           | 10-20° | 0-90°  |
| 20170801_24_PanCam_24.tif | Br 100   | AUPE       | 1024x1024  | 2m    | 0.1-0.5mm  | 0.1-0.5m        | 0.5-1m           | 10-20° | 0-90°  |
| 20170801_25_PanCam_25.tif | Br 100   | AUPE       | 1024x1024  | 2m    | 0.1-0.5mm  | 0.1-0.5m        | 0.5-1m           | 10-20° | 0-90°  |
| 20170801_26_PanCam_26.tif | Br 100   | AUPE       | 1024x1024  | 2m    | 0.1-0.5mm  | 0.1-0.5m        | 0.5-1m           | 10-20° | 0-90°  |
| 20170801_27_PanCam_27.tif | Br 100   | AUPE       | 1024x1024  | 2m    | 0.1-0.5mm  | 0.1-0.5m        | 0.5-1m           | 10-20° | 0-90°  |
| 20170801_28_PanCam_28.tif | Br 100   | AUPE       | 1024x1024  | 2m    | 0.1-0.5mm  | 0.1-0.5m        | 0.5-1m           | 10-20° | 0-90°  |
| 20170801_29_PanCam_29.tif | Br 100   | AUPE       | 1024x1024  | 2m    | 0.1-0.5mm  | 0.1-0.5m        | 0.5-1m           | 10-20° | 0-90°  |
| 20170801_30_PanCam_30.tif | Br 100   | AUPE       | 1024x1024  | 2m    | 0.1-0.5mm  | 0.1-0.5m        | 0.5-1m           | 10-20° | 0-90°  |

### Validation Logic & Status

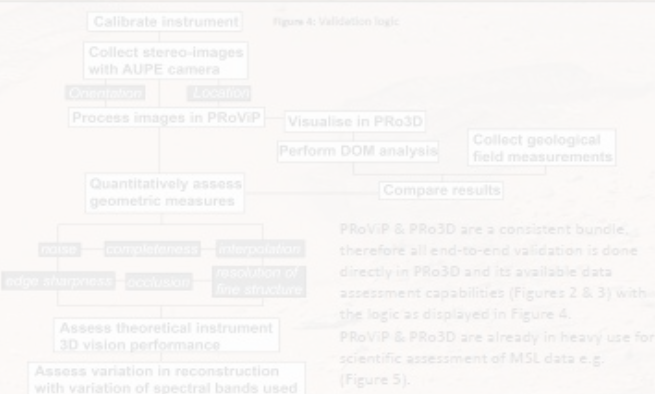

**Acknowledgements**

Supported by ESA-PRODEX and the Austrian Research Promotion Agency under ESA-PEA Grants 4000105586 & 4000127520. R8 and S6 were funded by UKSA grant ST/P002064/2. Thanks also to National Trust Brimham Rocks for allowing us to work on their premises, and the Mastcam-Z and PanCam P1s and Teams for their kind support in terms of requirements setting, data provision and valuable comments to track results and validation plans.

**References**

[1] Coates, A. J., et al. The PanCam instrument for the ExoMars rover. *Astrobiology* 17.6-7 (2017): 515-541.

[2] Paar, G., et al. Vision and Image Processing. In Gao, Yang, ed. *Contemporary Planetary Robotics: An Approach Toward Autonomous Systems* (2018). John Wiley & Sons, 2018.



[3] Bell, S. E. et al. (2016). Mastcam-Z: Designing a Geologic, Stereoscopic, and Multispectral Pair of Zoom Cameras for the NASA Mars 2020 Rover. *UPI Contributions*, 2016.

[4] Barnes R. et al., (2015) *GSA* 2015, Vol. 47, No. 7, p.111


[5] Barnham et al., (2018) *Sedimentology*, in press.

[6] Pugh, S., et al., (2012) *Int. Symp. On Art. Int. Robotics and Automation in Space*.

# MINERVA ROCC Embedding (In discussion)

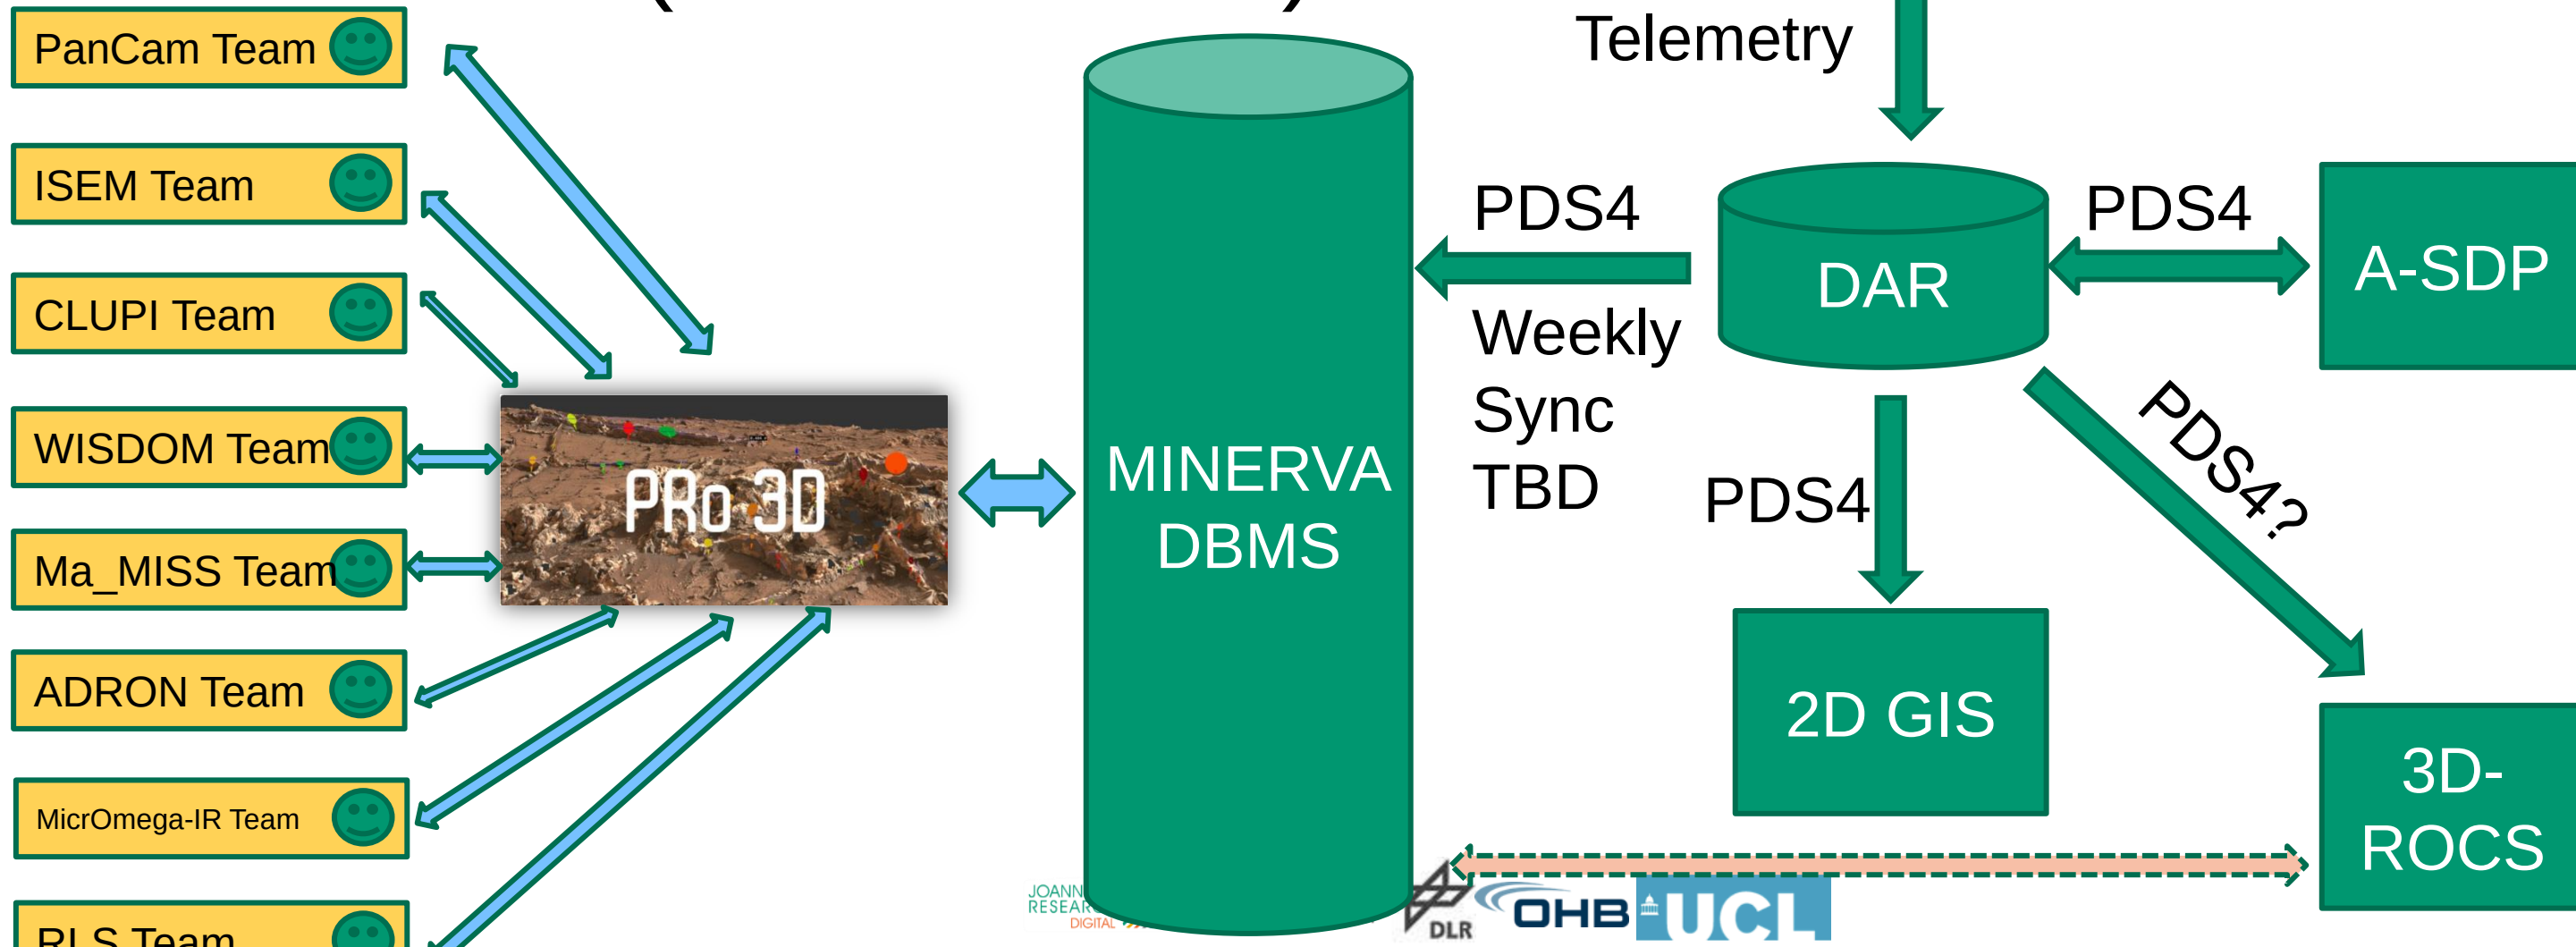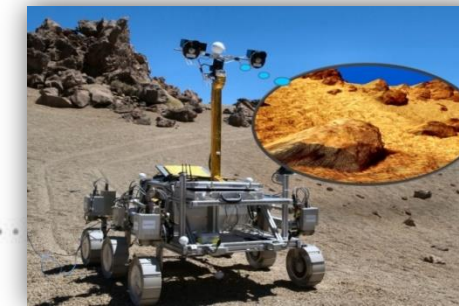


# PSA (Option)

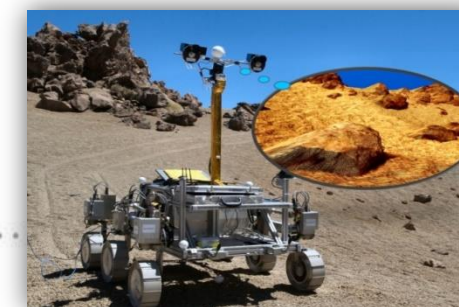

Telemetry



PDS4

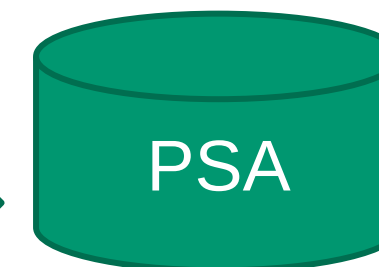

MINERVA  
Queries

Retrieve

Display & Select



Science Community

